




钢制滚子链及附件

STEEL ROLLER CHAINS AND ATTACHMENTS

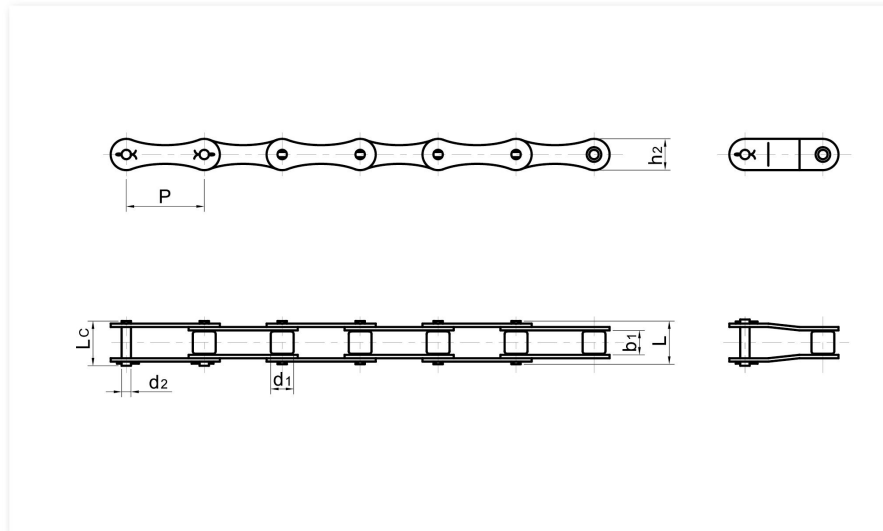


GL Chain No.	节距 Pitch	内节内宽 Inside width	滚子外径 Roller dia.	销轴直径 Pin dia.	内链板高度 Inner plate depth	销轴长度 Pin length		抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
	P	b1	d1	d2	h2	L	Lc	Q	q
	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
S32	29.21	15.88	11.43	4.47	13.50	26.70	28.80	8.00	0.86
S42	34.93	19.05	14.27	7.01	19.80	34.30	37.00	26.70	1.60
S45	41.40	22.23	15.24	5.74	17.30	37.70	40.40	17.80	1.46
S45R	41.40	22.23	32.50	7.16	17.00	39.50	45.00	42.50	1.63
S51	38.10	16.00	15.24	5.74	17.30	30.00	35.00	36.10	1.10
S52	38.10	22.23	15.24	5.74	17.30	37.70	40.40	17.80	1.68
S55	41.40	22.23	17.78	5.74	17.30	37.70	40.40	17.80	1.80
S55R	41.40	22.23	17.78	8.90	22.40	41.00	44.00	44.50	2.49
S62	41.91	25.40	19.05	5.74	17.30	41.00	44.00	26.70	1.87
S77	58.34	22.23	18.26	8.92	26.20	43.20	46.40	44.50	2.65
S88	66.27	28.58	22.86	8.92	26.20	49.80	53.00	44.50	3.25
A550	41.40	19.81	16.70	7.16	19.05	34.50	39.68	47.50	1.78
A620	42.01	24.51	17.91	7.16	19.05	41.50	46.83	47.50	2.44
CA642	41.40	19.00	15.88	8.27	22.20	34.40	44.20	49.80	1.90
CA643	41.40	22.20	15.88	8.27	22.20	41.00	48.30	60.50	2.40
CA645	41.40	22.20	17.78	8.27	22.20	41.00	48.30	60.50	2.60
CA650	50.80	19.05	19.05	9.52	26.70	40.20	46.80	80.00	3.62
CA650F1	50.80	19.05	25.00	11.28	25.00	49.20	53.70	120.00	4.29




钢制滚子链及附件

STEEL ROLLER CHAINS AND ATTACHMENTS



GL Chain No.	节距 Pitch	内节内宽 Inside width	滚子外径 Roller dia.	销轴直径 Pin dia.	内链板高度 Inner plate depth	销轴长度 Pin length		抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
	P	b1	d1	d2	h2	L	Lc	Q	q
	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
CA550	41.40	20.20	16.87	7.16	19.30	35.00	38.00	39.10	1.94
CA550-45	41.40	19.81	15.24	7.16	19.05	34.50	—	39.10	2.00
CA550-55	41.40	19.81	17.78	7.16	19.05	34.50	—	39.10	2.00
CA550HD	41.40	19.48	16.66	8.28	19.81	36.83	—	67.90	—
CA555	41.40	12.70	16.81	7.16	19.30	29.70	33.10	42.90	1.83
CA557	41.40	19.81	17.80	7.92	23.10	37.40	40.60	64.00	2.20
CA620	42.01	24.51	17.91	7.16	19.05	41.80	45.20	47.50	2.53
CA624	38.40	19.05	15.88	8.28	20.50	35.30	—	39.10	—
CA960	41.40	22.61	17.78	8.89	23.11	40.13	—	—	—
CA2050	31.75	9.53	10.08	5.08	14.68	20.19	—	—	—
CA2060H	38.10	12.70	11.91	5.94	17.45	29.74	31.70	31.10	1.50
CA2063H	38.10	12.70	11.89	5.94	19.30	29.40	34.20	31.10	1.65
CA2801	30.00	19.00	15.88	8.27	20.50	34.40	—	52.90	—
CA39	38.40	19.00	15.88	6.92	17.20	33.10	—	31.10	—

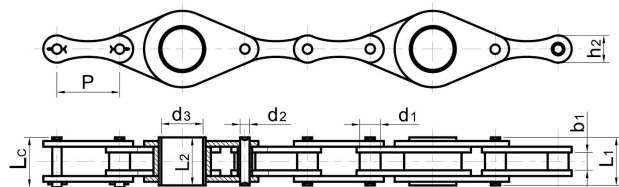



GL Chain No.	节距 Pitch	滚子外径 Roller dia.	内节内宽 Inside width	销轴直径 Pin dia.	空心销内径 Hollow pin inn dia.	销轴长度 Pin length			内链板高度 Inner plate depth	抗拉强度 Ultimate tensile strength
	P	d1(max)	b1(min)	d2(max)	d3(max)	L(max)	L2(max)	Lc(max)	h2(max)	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN
216BF1	50.80	15.88	17.02	8.28	35.30	37.80	35.80	41.30	22.00	60.00



钢制滚子链及附件



STEEL ROLLER CHAINS AND ATTACHMENTS

链号	P	F	W	G	h4	d4	K
Chain No.	mm	mm	mm	mm	mm	mm	mm
S42BK1Y	34.93	50.80	74.90	17.50	14.00	8.30	11.50
S52BK1Y	38.10	58.80	78.00	19.00	11.40	8.30	9.90
S62BK1Y	41.91	66.80	95.40	22.00	11.40	6.50	13.00
S62BK1X	41.91	66.80	95.40	22.00	11.40	8.30	14.70
CA550BK1Y	41.40	52.50	76.20	22.00	12.70	8.30	10.00



链号	P	C	a
Chain No.	mm	mm	mm
S62F1	41.91	50.00	50.00

链号	P	E	F	W	C	d4
Chain No.	mm	mm	mm	mm	mm	mm
S52F4	38.10	37.00	53.80	69.50	29.40	6.40
S55F2	41.40	40.00	58.00	87.00	30.00	6.40

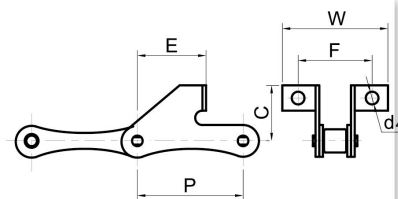

链号	P	G	F	W	h4	d4
Chain No.	mm	mm	mm	mm	mm	mm
CA550F1	41.10	60.00	53.94	76.20	14.60	9.90