



Double Pitch Sprockets Asian Standard Series


NK 2040SB NK2050SB NK2060SB

NK 2040SB

SPROCKETS	mm
Tooth width (T)	7.2

CHAIN	mm
Pitch (P)	25.4
Internal width	7.95
Roller Φ (Dr)	7.95

Type	Teeth	Do	Dp	Bore d			BD	BL	Wt kg	Material
				Stock	Min	Max				
NK 2040SB	6 1/2	59	54.66	13	15	20	35	22	0.20	C45 Solid Hardened Teeth
	7 1/2	67	62.45	13	15	25	43	22	0.30	
	8 1/2	76	70.31	13	15	32	52	22	0.42	
	9 1/2	84	78.23	13	15	38	60	25	0.61	
	10 1/2	92	86.17	14	16	46	69	25	0.82	
	11 1/2	100	94.15	14	16	51	77	25	0.98	
	12 1/2	108	102.14	14	16	42	63	25	0.83	

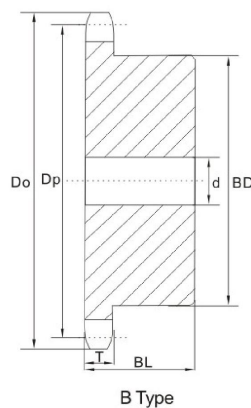

Type	Teeth	Do	Dp	Bore d			BD	BL	Wt kg	Material
				Stock	Min	Max				
NK 2050SB	6 1/2	74	68.32	14	16	25	44	25	0.38	C45 Solid Hardened Teeth
	7 1/2	84	78.06	14	16	32	54	25	0.55	
	8 1/2	94	87.89	14	16	45	65	25	0.76	
	9 1/2	105	97.78	14	16	48	73	28	1.06	
	10 1/2	115	107.72	14	16	48	73	28	1.16	
	11 1/2	125	117.68	16	18	48	73	28	1.27	
	12 1/2	135	127.67	16	18	48	73	28	1.40	

NK 2050SB

SPROCKETS	mm
Tooth width (T)	8.7

CHAIN	mm
Pitch (P)	31.75
Internal width	9.53
Roller Φ (Dr)	10.16

Type	Teeth	Do	Dp	Bore d			BD	BL	Wt kg	Material
				Stock	Min	Max				
NK 2060SB	6 1/2	88	81.98	14	16	32	53	32	0.73	C45 Solid Hardened Teeth
	7 1/2	101	93.67	16	18	45	66	32	1.05	
	8 1/2	113	105.47	16	18	48	73	32	1.33	
	9 1/2	126	117.34	16	18	55	83	40	2.03	
	10 1/2	138	129.26	16	18	55	83	40	2.23	
	11 1/2	150	141.22	16	18	55	80	45	2.56	
	12 1/2	162	153.20	16	18	55	80	45	2.81	

NK 2060SB

SPROCKETS	mm
Tooth width (T)	11.7

CHAIN	mm
Pitch (P)	38.10
Internal width	12.70
Roller Φ (Dr)	11.91