





输送用模锻易拆链


Drop-forged rivetless chains for conveyors



GL 链号	节距 (mm)	尺寸 Dimension(mm)									侧弯角度 (°)	极限强度 (KN)	重量 (Kg/m)
Chain No.	Pitch	A	B	F	S	J	K	T	D		Lateral Angle	Ultimate Strength	Weight
X348	76.6	46.0	18.8	27.0	13.5	13.2	20.6	10.2	12.7		9.0	110.0	3.2
X458	102.4	56.0	25.4	36.0	17.4	16.0	26.5	12.0	16.0		9.0	220.0	4.7
X678	153.2	77.0	32.0	51.0	25.0	21.0	34.2	17.0	22.0		7.0	320.0	9.5
X80	80.0	46.0	18.8	27.0	13.5	13.2	20.6	6.3	12.7		6.5	110.0	3.1
F100	100.0	56.0	25.0	36.0	17.4	16.0	26.5	12.0	16.0		9.0	220.0	4.7




GL 链号	节距 (mm)	尺寸 Dimension(mm)									侧弯角度 (°)	极限强度 (KN)	重量 (Kg/m)
Chain No.	Pitch	A	B	F	S	J	K	T	D		Lateral Angle	Ultimate Strength	Weight
S458	102.4	49.5	25.4	36.0	17.4	16.0	27.0	7.8	16.0		9.0	220.0	4.7
S348	76.6	46.0	18.8	27.0	13.5	13.2	20.6	6.3	12.7		9.0	110.0	3.2
S678	153.2	66.6	32.0	51.0	25.0	21.0	34.2	12.7	22.0		7.0	320.0	9.5
S698	153.2	93.0	39.7	69.9	30.2	25.4	41.3	14.3	29.1		5.0	600.0	19.6




GL 链号	节距 (mm)	尺寸 Dimension(mm)									侧弯角度 (°)	极限强度 (KN)	重量 (Kg/m)
Chain No.	Pitch	A	B	F	S	J	K	T	D		Lateral Angle	Ultimate Strength	Weight
348	76.6	44.5	18.8	27.0	13.5	13.2	20.6	7.6	12.7		9.0	110.0	3.2
458	102.4	58.0	25.4	36.0	17.4	16.0	26.5	8.5	16.0		9.0	220.0	4.7
678	153.2	77.0	32.0	51.0	25.0	21.0	34.2	12.0	22.0		7.0	320.0	9.5
698	153.2	95.3	39.0	64.0	32.0	25.4	42.3	15.0	28.0		5.0	515.0	16.9
998	229.4	95.3	39.7	67.6	30.2	25.4	41.7	15.0	28.6		5.0	605.0	14.8
9118	229.4	125.0	50.0	78.0	37.2	33.5	52.0	20.0	35.0		5.0	832.0	24.2
80	80.0	48.0	18.8	29.0	13.5	13.0	21.0	6.5	12.0		6.5	110.0	3.2
80H	80.0	72.0	32.0	42.0	19.5	19.0	34.5	11.0	18.0		6.5	250.0	8.7
XT100	100.0	58.0	25.0	37.0	17.4	16.0	26.5	8.5	16.0		9.0	220.0	4.7
XT160	160.0	78.0	34.5	54.0	28.0	20.5	36.0	12.0	24.0		5.0	410.0	10.3




模锻销轴 Drop-forged pin



GL 链号	尺寸 Dimension(mm)									重量 (KgPcs)
Chain No.	A	C	L	D	G	F	B	E	M	Weight
X458	31.0	43.0	89.5	16.0	40.0	10.0	/	/	/	0.18




GL 链号	尺寸 Dimension(mm)									重量 (KgPcs)
Chain No.	A	C	L	D	G	F	B	E	M	Weight
X458	31.0	42.0	92.0	16.0	/	/	36.0	4.8	M12	0.15
X678-1	48.0	57.2	136.0	22.0	/	/	59.0	/	M22	0.46
X678-2	48.0	57.2	119.0	22.0	/	/	42.0	/	M16	0.39
X698-1	63.0	69.2	138.0	28.0	/	/	40.0	/	3/4-10UNC	0.76
X698-2	63.0	69.2	146.0	28.0	/	/	50.8	3.2	1 1/8-7UNC	0.82




GL 链号	尺寸 Dimension(mm)									重量 (KgPcs)
Chain No.	A	C	L	D	G	F	B	E	M	Weight
X348	25.0	42.0	63.5	12.7	/	/	15.0	2.5	M10	0.06
X458	32.0	50.0	77.5	16.0	/	/	20.0	3.1	M12	0.12
X678	46.0	57.5	96.0	22.0	/	/	29.0	4.5	M16	0.32
X698-1	63.0	69.2	111.6	28.6	/	/	28.2	3.0	3/4-10UNC	0.67
X698-2	63.0	68.4	122.3	28.6	/	/	40.0	/	3/4-10UNC	0.69




模锻推杆-X348 Drop-forged pusher dog-X348



GL 链号	尺寸 Dimension(mm)						重量 (KgPcs)	极限强度 (KN)
Chain No.	P	B	H	D	A	F	Weight	Ultimate Strength
X348	76.6	28.0	63.5	12.7	/	/	0.42	110.0



GL 链号	尺寸 Dimension(mm)						重量 (KgPcs)	极限强度 (KN)
Chain No.	P	B	H	D	A	F	Weight	Ultimate Strength
X348	76.6	28.0	60.3	12.7	38.1	/	0.45	110.0




GL 链号	尺寸 Dimension(mm)						重量 (KgPcs)	极限强度 (KN)
Chain No.	P	B	H	D	A	F	Weight	Ultimate Strength
X348	76.6	28.0	60.0	12.7	/	80.0	0.65	110.0





www.goodlucktransmission.com

模锻推杆-X458


Drop-forged pusher dog-X348



GL 链号	尺寸 Dimension(mm)						重量 (KgPcs)	极限强度 (KN)
Chain No.	P	B	H	D	A	F	Weight	Ultimate S trength
X458	102.4	35.0	55.0	16.0	8.2	/	0.70	210.0



GL 链号	尺寸 Dimension(mm)						重量 (KgPcs)	极限强度 (KN)
Chain No.	P	B	H	D	A	F	Weight	Ultimate S trength
X458	102.4	35.0	61.5	16.0	25.4	/	0.75	210.0




GL 链号	尺寸 Dimension(mm)						重量 (KgPcs)	极限强度 (KN)
Chain No.	P	B	H	D	A	F	Weight	Ultimate S trength
X458	102.4	35.0	70.3	16.0	/	92.0	1.35	210.0





苏州股特来传动科技有限公司

模锻推杆-X678

Drop-forged pusher dog-X678



GL 链号	尺寸 Dimension(mm)						重量 (KgPcs)	极限强度 (KN)
Chain No.	P	B	H	D	A	F	Weight	Ultimate S trength
X678	153.2	51.0	64.0	22.0	/	/	1.65	380.0




GL 链号	尺寸 Dimension(mm)						重量 (KgPcs)	极限强度 (KN)
Chain No.	P	B	H	D	A	F	Weight	Ultimate S trength
X678	153.2	51.0	82.0	22.0	/	100.0	2.30	380.0



www.goodlucktransmission.com

模锻滑架 Drop-forged trolley

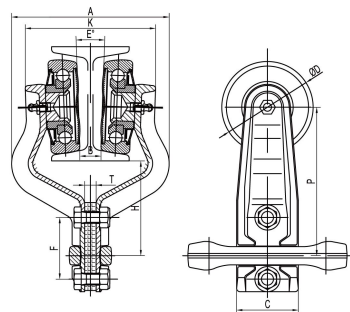


GL 链号	尺寸 Dimension(mm)										重量 (KgSet)
Chain No.	P	H	A	K	E	F	B	T	C	D	Weight
X348-1	100.0	64.0	102.0	84.0	4°	47.8	14.0	6.0	40.0	60.0	1.3
X348-2	100.0	63.5	122.0	94.0	6°	48.0	18.0	6.0	40.0	60.0	1.3
X458-1	130.0	83.0	138.0	113.0	4°	54.0	18.0	10.0	54.0	82.0	3.0
X458-2	128.5	82.5	131.0	109.0	4°	54.0	20.0	10.0	54.0	80.0	3.0
X458-3	150.0	103.0	138.0	106.0	4°	54.0	18.0	10.0	54.0	82.0	3.2
X678	170.0	102.0	171.0	145.0	4°	70.0	24.0	12.7	85.0	120.0	7.4
XT100	130.0	83.0	138.0	113.0	4°	54.0	18.0	10.0	54.0	82.0	3.0
XT160	171.0	103.0	180.0	140.0	6°	70.0	26.0	16.0	84.0	120.0	8.8




苏州股特来传动科技有限公司

模锻滑架 Drop-forged trolley



GL 链号	尺寸 Dimension(mm)											重量 (KgSet)
Chain No.	P	H	A	K	E	F	B	T	C	G	D	Weight
S348	100.0	65.8	143.0	104.0	3°	47.8	22.0	6.0	40.0	/	60.0	1.5

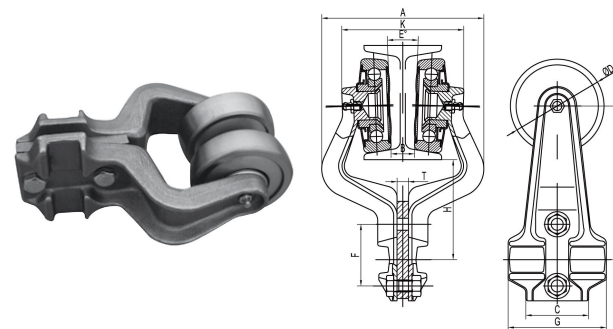


GL 链号	尺寸 Dimension(mm)											重量 (KgSet)
Chain No.	P	H	A	K	E	F	B	T	C	G	D	Weight
678	136.0	89.0	146.0	114.0	4°	54.0	18.0	10.0	86.0	54.0	82.0	3.6



www.goodlucktransmission.com

模锻反向滑架 Drop-forged reverse trolley

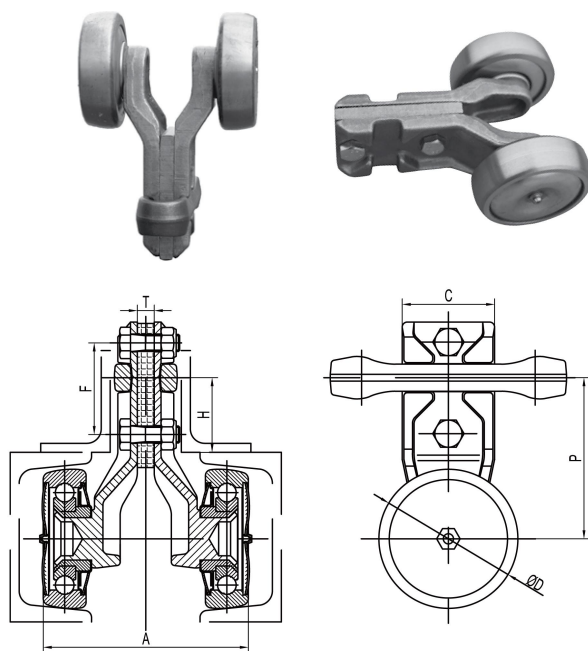


GL 链号	尺寸 Dimension(mm)							重量 (Kg&et)
Chain No.	P	H	A	F	T	C	D	Weight
X348	86.0	48.0	93.0	55.0	6.0	40.0	60.0	1.3
X458	95.0	44.0	120.0	54.0	10.0	54.5	82.0	2.5

49




苏州股特来传动科技有限公司



滑架吊具夹板 Attachment for trolley



GL 链号	尺寸 Dimension(mm)									
Chain No.	A	L	F	B	C	D	E	T	S	M
X348	38.1	135.5	47.8	80.0	25.4	8.5	13.5	6.0	14.0	/
X458	54.0	148.2	54.0	52.5	33.5	10.5	13.5	10.0	17.0	/
X678	76.2	177.8	70.0	92.0	41.5	13.5	20.5	12.7	20.8	/
XT160	80.0	248.0	70.0	107.0	43.5	13.0	20.0	16.0	32.0	/



GL 链号	尺寸 Dimension(mm)									
Chain No.	A	L	F	B	C	D	E	T	S	M
X348	38.1	68.0	47.8	/	25.4	8.3	/	6.0	/	/
X458	54.0	85.0	54.0	/	33.5	11.5	/	10.0	/	/
X678	80.0	110.0	70.0	/	41.5	13.5	/	12.7	/	/
XT160	80.0	110.0	70.0	/	43.5	13.0	/	16.0	/	/




GL 链号	尺寸 Dimension(mm)									
Chain No.	A	L	F	B	C	D	E	T	S	M
X348	38.1	146.1	47.8	39.7	25.4	8.3	3.6	6.4	/	1/2-13UNC
X458	50.8	177.8	54.0	47.6	33.5	10.3	5.0	9.5	/	5/8-11UNC
X678	76.2	222.0	70.0	66.7	41.5	13.5	5.6	12.7	/	7/8-9UNC
XT160	78.0	225.0	70.0	67.0	43.5	13.0	5.0	16.0	/	M24X3

50



www.goodlucktransmission.com

刮板输送机用模锻链 Drop-forged chains for scraper conveyors


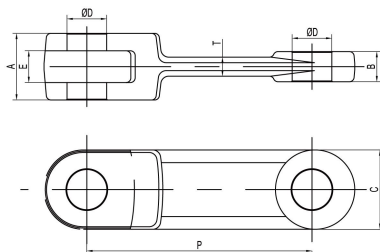


GL 链号	节距 (mm)	尺寸 Dimension(mm)							极限强度 Ultimate Strength(KN)			重量 (Kg/m)
Chain No.	Pitch	A	B	C	D	E	T		20CrMnTi	40Cr	42CrMo	Weight
10160B	101.6	24.0	8.0	36.0	14.0	9.0	6.0	90.0	100.0	130.0		3.5
10160	101.6	30.0	13.0	36.0	14.0	14.0	9.0	120.0	150.0	200.0		3.8
102	102.0	28.0	12.0	36.0	14.0	13.0	8.0	110.0	140.0	190.0		3.7
102F	102.0	33.5	14.0	38.0	14.0	15.0	10.0	150.0	180.0	230.0		4.0
125	125.0	36.0	15.0	36.0	16.0	16.0	10.0	180.0	210.0	260.0		4.8
14218	142.0	42.0	19.0	50.0	25.0	20.0	12.0	270.0	350.0	440.0		10.3
14226	142.0	62.0	28.0	50.0	25.0	30.0	15.0	370.0	450.0	550.0		14.7
150	150.0	42.0	16.0	48.0	25.0	18.0	12.0	230.0	280.0	350.0		9.9
160	160.0	43.0	20.0	50.0	25.0	22.0	12.0	270.0	350.0	440.0		9.6
160F	160.0	60.0	29.0	50.0	25.0	30.0	24.0	380.0	460.0	560.0		14.7
200	200.0	56.0	25.5	50.0	25.0	27.0	16.0	350.0	430.0	530.0		10.7
200F	200.0	70.0	30.0	70.0	32.0	32.0	25.0	500.0	600.0	750.0		30.7
216	216.0	58.0	25.0	72.0	35.0	27.0	18.0	480.0	570.0	700.0		21.3
260	260.0	70.0	30.0	75.0	32.0	32.0	20.0	600.0	720.0	900.0		20.7





苏州股特来传动科技有限公司

刮板输送机用模锻链 Drop-forged chains for scraper conveyors

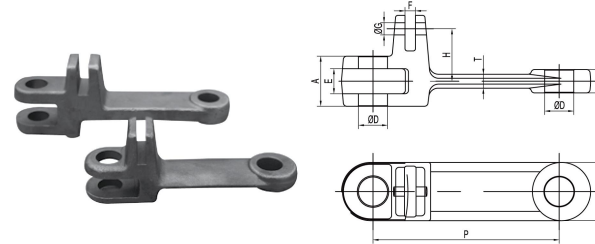

GL 链号	节距 (mm)	尺寸 Dimension(mm)									极限强度 Ultimate Strength(KN)			重量 (Kg)
Chain No.	Pitch	A	B	C	D	E	F	G	H	T	20CrMnTi	40Cr	42CrMo	Weight
160U	160.0	43.0	20.0	50.0	25.0	22.0	9.0	10.5	45.0	12.0	270.0	350.0	440.0	12.2
200U	200.0	56.0	25.5	50.0	25.0	27.0	18.0	12.0	42.0	16.0	350.0	430.0	530.0	11.0

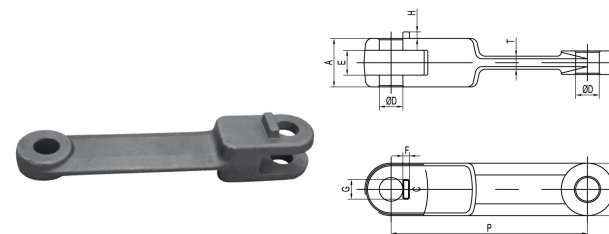


GL 链号 节距 (mm)		尺寸 Dimension(mm)									极限强度 Ultimate Strength(KN)			重量 (Kg/m)
Chain No.	Pitch	A	B	C	D	E	F	G	H	T	20CrMnTi	40Cr	42CrMo	Weight
150D	150.0	37.0	18.0	40.0	18.0	19.0	5.0	15.0	5.0	10.0	200.0	230.0	300.0	9.7
200D	200.0	41.0	20.0	46.0	20.0	21.0	6.0	18.0	5.0	12.0	220.0	260.0	340.0	7.8




www.goodlucktransmission.com

输送用模锻糖机链

Drop-forged main cane carrier chains for conveyors

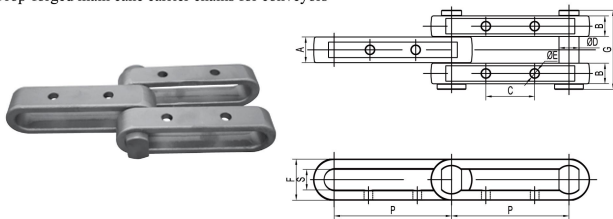

GL 链号	节距 (mm)	尺寸 Dimension(mm)								极限强度 (KN)	重量 (Kg/m)
Chain No.	Pitch	A	B	F	S	C	E	G	D	Ultimate S trength	Weight
6"-1	152.4	44.5	38.1	55.5	30.0	76.2	14.0	146.5	28.5	1000.0	28.7
6"-2	152.4	50.0	40.0	80.0	40.0	76.4	17.0	156.0	38.9	1100.0	40.6
9"-1	228.6	50.8	38.1	80.0	40.0	100.0	17.0	152.0	39.0	1000.0	35.0
9"-2	228.6	75.0	50.0	83.0	40.0	95.0	17.0	201.0	39.0	1000.0	54.1

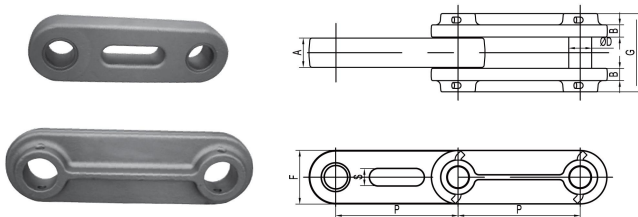

GL链号	节距 (mm)	尺寸 Dimension(mm)								极限强度 (KN)	重量 (Kg/m)
Chain No.	Pitch	A	B	F	S	C	E	G	D	Ultimate S trength	Weight
250	250.0	56.0	25.0	110.0	25.0	/	/	160.0	47.0	2010.0	61.7


53



苏州股特来传动科技有限公司

模锻/铸造中转输送链

Drop-forged/Cast chains for transfer conveyors

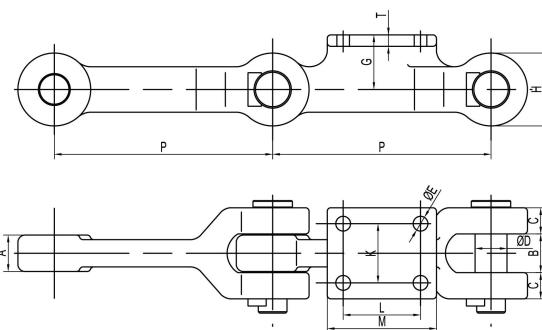

GL 链号	节距 (mm)	尺寸 Dimension(mm)													极限强度 (KN)	重量 Weight(Kg/Link)	
Chain No.	Pitch	A	B	C	F	G	H	T	K	L	M	D	E	Ultimate S trength	基础 Link	附件链 Attachm	
8"/P203.2	203.2	40.0	42.0	25.4	92.8	81.6	74.8	16.5	56.2	50.0	105.0	38.5	17.0	500.0	5.6	7.0	
9"/P228.6	228.6	38.0	41.0	38.0	117.0	60.0	90.0	18.0	90.0	75.0	120.0	40.0	10.0	637.0	9.0	12.0	
12"/P304.8	304.8	50.5	54.0	36.5	127.0	76.0	102.0	20.0	83.0	108.0	165.0	44.4	12.0	1246.0	14.0	17.0	

54