




NM COUPLINGS

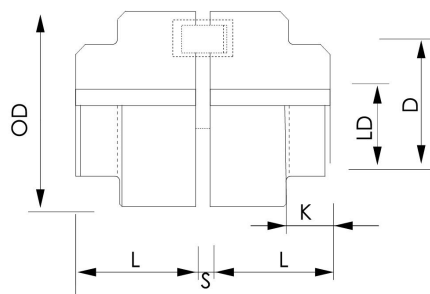

SIZE	Bore/孔径		D	OD	L	K	S
型号	Min./最小	Max./最大					
50	7	19	33	50	25	12.5	2.0±0.5
67	9	28	46	67	30	15.0	2.5±0.5
82	10	32	53	82	40	16.0	3.0±1.0
97	12	42	69	97	50	20.0	3.0±1.0
112	14	48	80	112	60	35.0	3.5±1.0
128	18	55	90	128	70	41.0	3.5±1.0
148	22	65	107	148	80	48.0	3.5±1.0
168	28	75	125	168	90	54.0	3.5±1.0

SIZE 型号	Torque/扭矩		Max Speed rpm
	Nomal (N.M) 额定 (牛.米)	Max (N.M) 最大 (牛.米)	最大速度 rpm
50	12.74	22.54	13500
67	21.56	39.20	10000
82	49.00	88.20	8000
97	102.90	186.20	7000
112	163.66	294.00	6000
128	261.66	470.40	5000
148	408.66	735.00	4500
168	681.10	1225.00	4000

$$\text{Required Torque(Nm)} = \frac{\text{Design Power(Kw)} \times 9555}{\text{rev/min}}$$

$$\text{所求扭矩 (Nm)} = \frac{\text{设计功率(Kw)} \times 9555}{\text{转/分}}$$