


A 系列短节距直板精密滚子链
Short pitch precision roller chain with straight plate (A series)

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates		Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	每米重量	
ISO	ANSI	P	d1	b1	d2	L	Lc	h2	T	Pt	Q	q	
			max	min	max	max	max	max	max				max
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm

*套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bush

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

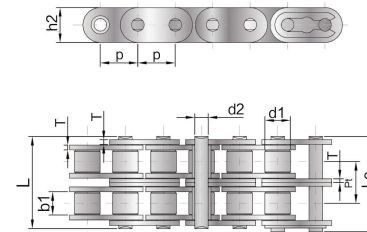


A 系列短节距直板精密滚子链
Short pitch precision roller chain with straight plate (A series)

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates		Pin Diameter	Pin Length		Inner Pin Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	每米重量
ISO	ANSI	p	d1	b1	d2	L	Lc	h2	T	Pt	Q	q	
		max	min	max	max	max	max	max	max				
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
SSC08A-2	SSC40-2	12.70	7.95	7.85	3.96	31.00	32.20	12.00	1.50	14.38	19.74	1.43	
SSC10A-2	SSC50-2	15.88	10.16	9.40	5.08	38.90	40.40	15.09	2.03	18.11	31.08	2.42	
SSC12A-2	SSC60-2	19.05	11.91	12.57	5.94	48.80	50.50	18/18.2	2.42	22.78	44.52	3.58/3.62	
SSC16A-2	SSC80-2	25.40	15.88	15.75	7.92	62.70	64.30	24.00	3.25	29.29	79.38	6.12	
SSC20A-2	SSC100-2	31.75	19.05	18.90	9.53	76.40	80.50	30.00	4.00	35.76	123.9	9.08	
SSC24A-2	SSC120-2	38.10	22.23	25.22	11.10	95.80	99.70	35.70	4.80	45.44	145	13.60	
SSC28A-2	SSC140-2	44.45	25.40	25.22	12.70	103.30	107.90	41.00	5.60	48.87	188	16.86	
SSC32A-2	SSC160-2	50.80	28.58	31.55	14.27	123.30	128.10	47.80	6.40	58.55	237.36	22.90	

*套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bush

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

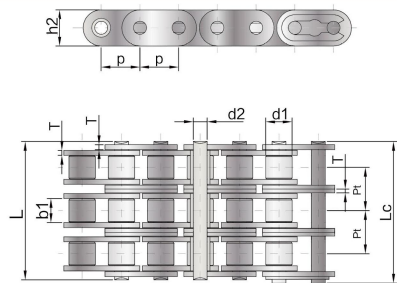


A 系列短节距直板精密滚子链
Short pitch precision roller chain with straight plate (A series)

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	每米重量
ISO	ANSI	P	d1	b1	d2	L	Lc	h2	T	Pt	Q	q
			max	min	max	max	max	max	max		min	
SSC08A-3	SSC40-3	12.70	7.95	7.85	3.96	45.40	46.60	12.00	1.50	14.38	29.61	2.40
SSC10A-3	SSC50-3	15.88	10.16	9.40	5.08	57.00	58.50	15.09	2.03	18.11	46.62	3.62
SSC12A-3	SSC60-3	19.05	11.91	12.57	5.94	71.50	73.30	18/18.2	2.42	22.78	66.78	5.36/5.41
SSC16A-3	SSC80-3	25.40	15.88	15.75	7.92	91.70	93.60	24.00	3.25	29.29	119.07	9.10
SSC20A-3	SSC100-3	31.75	19.05	18.90	9.53	112.20	116.30	30.00	4.00	35.76	185.85	13.60
SSC24A-3	SSC120-3	38.10	22.23	25.22	11.10	141.40	145.20	35.70	4.80	45.44	217.5	20.43
SSC28A-3	SSC140-3	44.45	25.40	25.22	12.70	152.20	156.80	41.00	5.60	48.87	282	25.23
SSC32A-3	SSC160-3	50.80	28.58	31.55	14.27	181.80	186.60	47.80	6.40	58.55	356.04	43.19

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bush

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

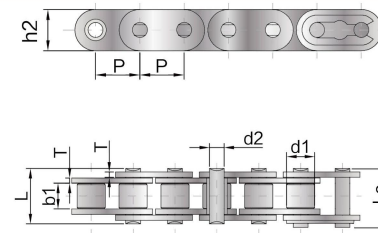


B 系列短节距直板精密滚子链
Short pitch precision roller chain with straight plate (B series)

GL Chain No	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	每米重量
ISO	P	d1	b1	d2	L	Lc	h2	T	Pt	Q	q
		max	min	max	max	max	max	max		min	
SSC08B-1	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.00	-	12.60	0.80
SSC10B-1	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.60	-	15.68	1.06
SSC12B-1	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	-	20.30	1.32
SSC16B-1	25.400	15.88	17.02	8.28	36.10	37.40	21/24	4.15/3.1	-	42.00	3.08/3.49
SSC20B-1	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	-	60.50	4.16
SSC24B-1	38.100	25.04	25.40	14.63	53.40	57.80	33.20	6.0/4.8	-	106.80	7.47
SSC28B-1	44.450	27.94	30.99	15.90	65.10	69.50	36.70	7.5/6.0	-	130.00	9.90
SSC32B-1	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	-	155.00	10.45

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bush

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

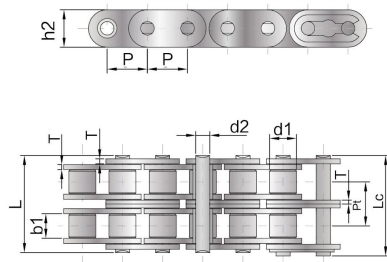


B 系列短节距直板精密滚子链
Short pitch precision roller chain with straight plate (B series)

GL Chain No	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径	销轴长度	内链板高度	链板厚度	排距	极限拉伸载荷	每米重量	q
		d1	b1	d2	L	Lc	h2				
ISO	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m	
SSC08B-2	12.700	8.51	7.75	4.45	31.00	32.20	11.80	1.00	13.92	25.00	1.45
SSC10B-2	15.875	10.16	9.65	5.08	36.10	37.50	14.70	1.60	16.59	31.36	2.00
SSC12B-2	19.050	12.07	11.68	5.72	42.00	43.60	16.00	1.85	19.46	40.60	2.62
SSC16B-2	25.400	15.88	17.02	8.28	68.00	69.30	21/24	4.15/3.1	31.88	84.00	6.10/6.92
SSC20B-2	31.750	19.05	19.56	10.19	77.80	81.50	26.40	4.5/3.5	36.45	121.00	8.23
SSC24B-2	38.100	25.04	25.40	14.63	101.70	106.20	33.20	6.0/4.8	48.36	213.60	14.77
SSC28B-2	44.450	27.94	30.99	15.90	124.60	129.10	36.70	7.5/6.0	59.56	260.00	19.82
SSC32B-2	50.800	29.21	30.99	17.81	124.60	129.60	42.00	7.0/6.0	58.55	310.00	20.94

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bush

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

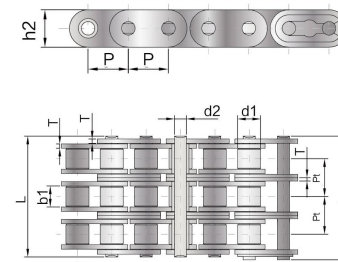

B 系列短节距直板精密滚子链
Short pitch precision roller chain with straight plate (B series)

GL Chain No	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径	销轴长度	内链板高度	链板厚度	排距	极限拉伸载荷	每米重量	q
		d1	b1	d2	L	Lc	h2				
ISO	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m	
SSC08B-3	12.700	8.51	7.75	4.45	45.10	46.10	11.80	1.00	13.92	37.80	2.10
SSC10B-3	15.875	10.16	9.65	5.08	52.70	54.10	14.70	1.60	16.59	47.04	2.87
SSC12B-3	19.050	12.07	11.68	5.72	61.50	63.10	16.00	1.85	19.46	60.90	3.89
SSC16B-3	25.400	15.88	17.02	8.28	99.80	101.20	21/24	4.15/3.1	31.88	126.00	9.12/10.34
SSC20B-3	31.750	19.05	19.56	10.19	114.20	117.90	26.40	4.5/3.5	36.45	181.50	11.34
SSC24B-3	38.100	25.04	25.40	14.63	150.10	154.60	33.20	6.0/4.8	48.36	320.40	22.10
SSC28B-3	44.450	27.94	30.99	15.90	184.20	188.70	36.70	7.5/6.0	59.56	390.00	29.64
SSC32B-3	50.800	29.21	30.99	17.81	183.20	188.20	42.00	7.0/6.0	58.55	465.00	31.56

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bush

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel