


双节距输送链
Double pitch conveyor chain

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸载荷	每米重量
ISO	ANSI	P	d1	b1	d2	L	Lc	h2	T	Q	q
		mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
SSC208A	SSC2040	25.400	7.95	7.85	3.96	16.60	17.80	12.00	1.50	9.87	0.50
SSC208AL	SSC2042	25.400	15.88	7.85	3.96	16.60	17.80	12.00	1.50	9.87	0.84
SSC208AH	SSC2040H	25.400	7.95	7.85	3.96	18.80	19.90	12.00	2.03	9.87	0.65
SSC208B		25.400	8.51	7.75	4.45	16.70	18.20	11.80	1.60	12.06	0.55
SSC208BL		25.400	15.88	7.75	4.45	16.70	18.20	11.80	1.60	12.06	0.89
SSC210A	SSC2050	31.750	10.16	9.40	5.08	20.70	22.20	15.00	2.03	15.54	0.78
SSC210AL	SSC2052	31.750	19.05	9.40	5.08	20.70	22.20	15.00	2.03	15.54	1.27
SSC212A	SSC2060	38.100	11.91	12.57	5.94	25.90	27.70	18.00	2.42	22.26	1.12
SSC212AL	SSC2062	38.100	22.23	12.57	5.94	25.90	27.70	18.00	2.42	22.26	1.61
SSC212AH	SSC2060H	38.100	11.91	12.57	5.94	29.20	31.60	18.00	3.25	22.26	1.44
SSC212AHL	SSC2062H	38.100	22.23	12.57	5.94	29.20	31.60	18.00	3.25	22.26	2.07
SSC216A	SSC2080	50.800	15.88	15.75	7.92	32.70	36.50	24.00	3.25	39.69	2.08
SSC216AL	SSC2082	50.800	28.58	15.75	7.92	32.70	36.50	24.00	3.25	39.69	3.12
SSC216AH	SSC2080H	50.800	15.88	15.75	7.92	36.20	39.40	24.00	4.00	39.69	2.54
SSC216AHL	SSC2082H	50.800	28.58	15.75	7.92	36.20	39.40	24.00	4.00	39.69	3.58
SSC220A	SSC2100	63.500	19.05	18.90	9.53	40.40	44.70	30.00	4.00	61.95	3.01
SSC220AL	SSC2102	63.500	39.67	18.90	9.53	40.40	44.70	30.00	4.00	61.95	4.83
SSC220AH	SSC2100H	63.500	19.05	18.90	9.53	43.60	46.90	30.00	4.80	61.95	3.56
SSC220AHL	SSC2102H	63.500	39.67	18.90	9.53	43.60	46.90	30.00	4.80	61.95	5.38
SSC224A	SSC2120	76.200	22.23	25.22	11.10	50.30	54.30	35.70	4.80	72.50	4.66
SSC224AL	SSC2122	76.200	44.45	25.22	11.10	50.30	54.30	35.70	4.80	72.50	7.66
SSC224AHL	SSC2120H	76.200	22.23	25.22	11.10	53.50	57.50	35.70	5.60	72.50	5.26
SSC224AHL	SSC2122H	76.200	44.45	25.22	11.10	53.50	57.50	35.70	5.60	72.50	8.26
SSC232A	SSC2160	101.600	28.58	31.75	14.27	64.80	69.60	47.80	6.40	118.68	8.15
SSC232AL	SSC2162	101.600	57.15	31.75	14.27	64.80	69.60	47.80	6.40	118.68	13.00
SSC232AH	SSC2160H	101.600	28.58	31.75	14.27	68.20	73.00	47.80	7.20	118.68	9.06
SSC232AHL	SSC2162H	101.600	57.15	31.75	14.27	68.20	73.00	47.80	7.20	118.68	12.77


链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

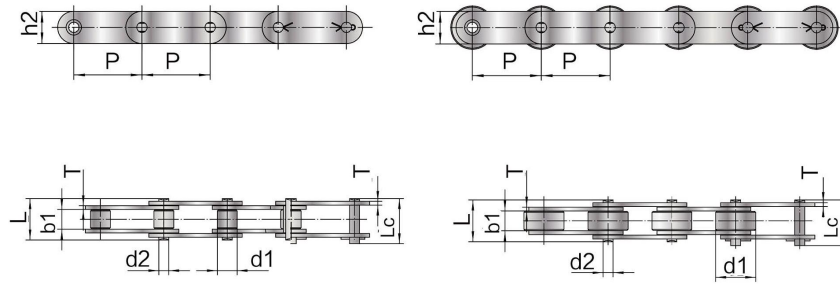

双节距输送链
Double pitch conveyor chain

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸载荷	每米重量
		P	d1	b1	d2	L	Lc	h2	T	Q	q
ISO	ANSI	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
SSC216AHL	SSC2082H	50.800	28.58	15.75	7.92	36.20	39.20	24.10	4.00	39.20	3.58
SSC220A	SSC2100	63.500	19.05	18.90	9.53	40.30	443.00	30.20	4.00	60.20	3.01
SSC220AL	SSC2102	63.500	39.67	18.90	9.53	40.30	43.00	30.20	4.00	60.20	4.83
SSC220AH	SSC2100H	63.500	19.05	18.90	9.53	43.60	46.85	30.20	4.80	60.20	3.56
SSC220AHL	SSC2102H	63.500	39.67	18.90	9.53	43.60	46.85	30.20	4.80	60.20	5.38
SSC224A	SSC2120	76.200	22.23	25.22	11.10	50.30	54.30	36.10	4.80	93.00	4.66
SSC224AL	SSC2122	76.200	44.45	25.22	11.10	50.30	54.30	36.10	4.80	93.00	7.66
SSC224AH	SSC2120H	76.200	22.23	25.22	11.10	53.80	56.90	36.10	5.60	93.00	5.26
SSC224AHL	SSC2122H	76.200	44.45	25.22	11.10	53.80	56.90	36.10	5.60	93.00	8.26
SSC232A	SSC2160	101.600	28.58	31.75	14.27	65.50	69.00	48.00	6.40	118.68	8.15
SSC232AL	SSC2162	101.600	57.15	31.75	14.27	65.50	69.00	48.00	6.40	118.68	13.00
SSC232AH	SSC2160H	101.600	28.58	31.75	14.27	68.50	72.35	48.00	7.20	118.68	9.06
SSC232AHL	SSC2162H	101.600	57.15	31.75	14.27	68.50	72.35	48.00	7.20	118.68	12.77

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

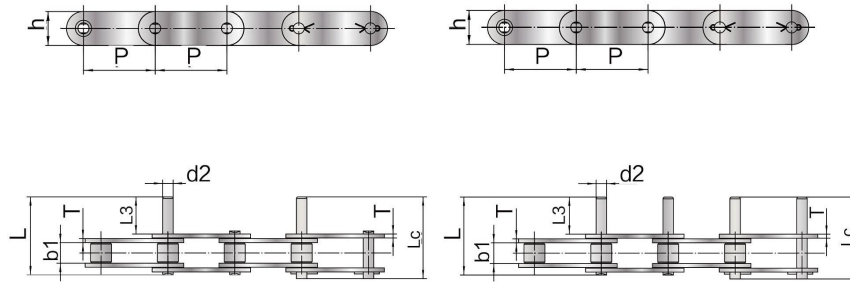

双节距带加长销输送链
Double pitch conveyer chain with extended pin

GL Chain No		P	d2	L3	L	Lc
ISO	ANSI	mm	mm	mm	mm	mm
SSC208A	SSC2040	25.400	3.96	9.50	25.10	26.20
SSC208AL	SSC2042					
SSC210A	SSC2050	31.750	5.08	11.90	31.30	33.10
SSC210AL	SSC2052					
SSC212A	SSC2060	38.100	5.94	14.30	38.60	40.60
SSC212AL	SSC2062					
SSC212AH	SSC2060H	38.100	5.94	14.30	42.00	43.80
SSC212AHL	SSC2062H					
SSC216A	SSC2080	50.800	7.92	19.10	50.30	53.30
SSC216AL	SSC2082					
SSC216AH	SSC2080H	50.800	7.92	19.10	53.50	55.00
SSC216AHL	SSC2082H					
SSC220A	SSC2100	63.500	9.53	23.80	61.80	66.10
SSC220AL	SSC2102					
SSC220AH	SSC2100H	63.500	9.53	23.80	65.00	68.30
SSC220AHL	SSC2102H					

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel