




苏州股特来传动科技有限公司

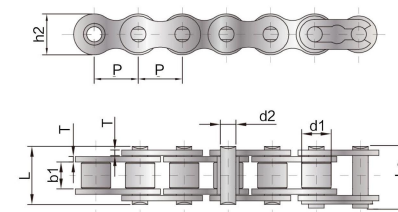


A 系列短节距单排精密滚子链
Short pitch precision single roller chain (A series)

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	每米重量
		P	d1	b1	d2	L	Lc	h2	T	Pt	Q	q
ISO	ANSI	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*SS04C-1	*SS25-1	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	-	2.45	0.15
*SS06C-1	*SS35-1	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	-	5.53	0.33
SS085-1	SS41-1	12.700	7.77	6.25	3.58	13.75	15.00	9.91	1.30	-	4.67	0.41
SS08A-1	SS40-1	12.700	7.95	7.85	3.96	16.60	17.80	12.00	1.50	-	9.87	0.62
SS10A-1	SS50-1	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	-	15.54	1.02
SS12A-1	SS60-1	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	-	22.26	1.50
SS16A-1	SS80-1	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	-	39.69	2.60
SS20A-1	SS100-1	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	-	61.95	3.91
SS24A-1	SS120-1	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	-	72.50	5.62
SS28A-1	SS140-1	44.450	25.40	25.22	12.70	54.40	59.00	41.00	5.60	-	94.00	7.50
SS32A-1	SS160-1	50.800	28.58	31.55	14.27	64.80	69.60	47.80	6.40	-	118.68	10.10
SS36A-1	SS180-1	57.150	35.71	35.48	17.46	72.80	78.60	53.60	7.20	-	177.67	13.45
SS40A-1	SS200-1	63.500	39.68	37.85	19.85	80.30	87.20	60.00	8.00	-	229.64	16.15
SS48A-1	SS240-1	76.200	47.63	47.35	23.81	95.50	103.00	72.39	9.50	-	330.40	23.20

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

传动链
DRIVING CHAIN

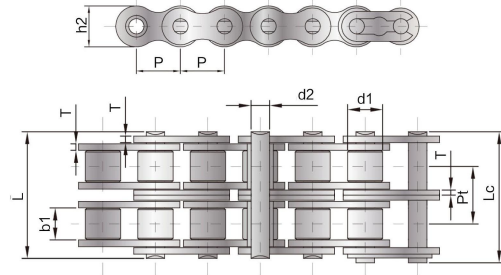


A 系列短节距双排精密滚子链
Short pitch precision duplex roller chain (A series)

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号		节距 P	滚子直径 d1	内节内宽 b1	销轴直径 d2	销轴长度 L Lc		内链板高度 h2	链板厚度 T	排距 Pt	极限拉伸载荷 Q	每米重量 q
			max	min	max	max	max	max	max		min	
			mm	mm	mm	mm	mm	mm	mm		KN	
ISO	ANSI	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*SS04C-2	*SS25-2	6.350	3.30	3.18	2.31	14.50	15.00	6.00	0.80	6.40	4.90	0.28
*SS06C-2	*SS35-2	9.525	5.08	4.77	3.58	22.50	23.30	9.00	1.30	10.13	11.06	0.63
SS085-2	SS41-2	12.700	7.77	6.25	3.58	25.70	26.90	9.91	1.30	11.95	9.36	0.81
SS08A-2	SS40-2	12.700	7.95	7.85	3.96	31.00	32.20	12.00	1.50	14.38	19.74	1.12
SS10A-2	SS50-2	15.875	10.16	9.40	5.08	38.90	40.40	15.09	2.03	18.11	31.08	2.00
SS12A-2	SS60-2	19.050	11.91	12.57	5.94	48.80	50.50	18.00	2.42	22.78	44.52	2.92
SS16A-2	SS80-2	25.400	15.88	15.75	7.92	62.70	64.30	24.00	3.25	29.29	79.38	5.15
SS20A-2	SS100-2	31.750	19.05	18.90	9.53	76.40	80.50	30.00	4.00	35.76	123.90	7.80
SS24A-2	SS120-2	38.100	22.23	25.22	11.10	95.80	99.70	35.70	4.80	45.44	145.00	11.70
SS28A-2	SS140-2	44.450	25.40	25.22	12.70	103.30	107.90	41.00	5.60	48.87	188.00	15.14
SS32A-2	SS160-2	50.800	28.58	31.55	14.27	123.30	128.10	47.80	6.40	58.55	237.36	20.14
SS36A-2	SS180-2	57.150	35.71	35.48	17.46	138.60	144.40	53.60	7.20	65.84	355.34	29.22
SS40A-2	SS200-2	63.500	39.68	37.85	19.85	151.90	158.80	60.00	8.00	71.55	459.28	32.24
SS48A-2	SS240-2	76.200	47.63	47.35	23.81	183.40	190.80	72.39	9.50	87.83	660.80	45.23

* 链筒直径 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

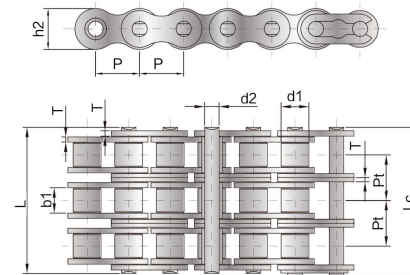


A 系列短节距三排精密滚子链
Short pitch precision triplex roller chain (A series)

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号		节距 P	滚子直径 d1	内节内宽 b1	销轴直径 d2	销轴长度 L Lc		内链板高度 h2	链板厚度 T	排距 Pt	极限拉伸载荷 Q	每米重量 q
			max	min	max	max	max	max	max		min	
			mm	mm	mm	mm	mm	mm	mm		KN	
ISO	ANSI	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*SS04C-3	*SS25-3	6.350	3.30	3.18	2.31	21.00	21.50	6.00	0.80	6.40	7.35	0.44
*SS06C-3	*SS35-3	9.525	5.08	4.77	3.58	32.70	33.50	9.00	1.30	10.13	16.59	1.05
SS08A-3	SS40-3	12.700	7.95	7.85	3.96	45.40	46.60	12.00	1.50	14.38	29.61	1.90
SS10A-3	SS50-3	15.875	10.16	9.40	5.08	57.00	58.50	15.09	2.03	18.11	46.62	3.09
SS12A-3	SS60-3	19.050	11.91	12.57	5.94	71.50	73.30	18.00	2.42	22.78	66.78	4.54
SS16A-3	SS80-3	25.400	15.88	15.75	7.92	91.70	93.60	24.00	3.25	29.29	119.07	7.89
SS20A-3	SS100-3	31.750	19.05	18.90	9.53	112.20	116.30	30.00	4.00	35.76	185.85	11.77
SS24A-3	SS120-3	38.100	22.23	25.22	11.10	141.40	145.20	35.70	4.80	45.44	217.50	17.53
SS28A-3	SS140-3	44.450	25.40	25.22	12.70	152.20	156.80	41.00	5.60	48.87	282.00	22.20
SS32A-3	SS160-3	50.800	28.58	31.55	14.27	181.80	186.60	47.80	6.40	58.55	356.04	30.02
SS36A-3	SS180-3	57.150	35.71	35.48	17.46	204.40	210.20	53.60	7.20	65.84	533.04	38.22
SS40A-3	SS200-3	63.500	39.68	37.85	19.85	223.50	230.40	60.00	8.00	71.55	688.92	49.03
SS48A-3	SS240-3	76.200	47.63	47.35	23.81	271.30	278.60	72.39	9.50	87.83	991.20	71.60

* 套筒直径 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

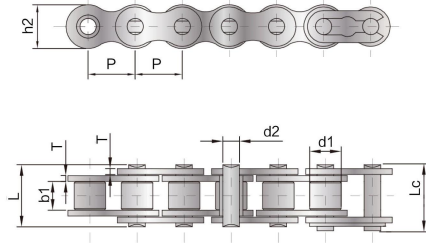


B 系列短节距单排精密滚子链
Short pitch precision single roller chain (B series)

GL Chain No	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	每米重量
ISO	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*SS04B-1	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	-	2.10	0.11
*SS05B-1	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	-	3.50	0.20
*SS06B-1	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	-	6.30	0.41
SS08B-1	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.00	-	12.60	0.69
SS10B-1	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.60	-	15.68	0.93
SS12B-1	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	-	20.30	1.15
SS16B-1	25.400	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	-	42.00	2.71
SS20B-1	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	-	60.50	3.70
SS24B-1	38.100	25.04	25.40	14.63	53.40	57.80	33.20	6.0/4.8	-	106.80	7.10
SS28B-1	44.450	27.94	30.99	15.90	65.10	69.50	36.70	7.5/6.0	-	130.00	8.50
SS32B-1	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	-	155.00	10.25
SS40B-1	63.500	39.37	38.10	22.89	82.20	89.20	52.96	8.5/8.0	-	226.70	16.35
SS48B-1	76.200	48.26	45.72	29.24	99.10	107.00	63.80	12.0/10.0	-	326.50	25.00

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

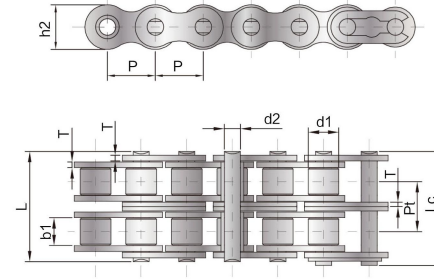


B 系列短节距双排精密滚子链
Short pitch precision duplex roller chain (B series)

GL Chain No	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	每米重量
ISO	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*SS05B-2	8.000	5.00	3.00	2.31	13.90	14.50	7.10	0.80	5.64	7.00	0.33
*SS06B-2	9.525	6.35	5.72	3.28	23.40	24.40	8.20	1.30	10.24	12.60	0.77
SS08B-2	12.700	8.51	7.75	4.45	31.00	32.20	11.80	1.00	13.92	25.20	1.34
SS10B-2	15.875	10.16	9.65	5.08	36.10	37.50	14.70	1.60	16.59	31.36	1.84
SS12B-2	19.050	12.07	11.68	5.72	42.00	43.60	16.00	1.85	19.46	40.60	2.31
SS16B-2	25.400	15.88	17.02	8.28	68.00	69.30	21.00	4.15/3.1	31.88	84.00	5.42
SS20B-2	31.750	19.05	19.56	10.19	77.80	81.50	26.40	4.5/3.5	36.45	121.00	7.20
SS24B-2	38.100	25.04	25.40	14.63	101.70	106.20	33.20	6.0/4.8	48.36	213.60	13.40
SS28B-2	44.450	27.94	30.99	15.90	124.60	129.10	36.70	7.5/6.0	59.56	260.00	16.60
SS32B-2	50.800	29.21	30.99	17.81	124.60	129.60	42.00	7.0/6.0	58.55	310.00	21.00
SS40B-2	63.500	39.37	38.10	22.89	154.50	161.50	52.96	8.5/8.0	72.29	453.40	32.00
SS48B-2	76.200	48.26	45.72	29.24	190.40	198.20	63.80	12.0/10.0	91.21	653.00	50.00

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

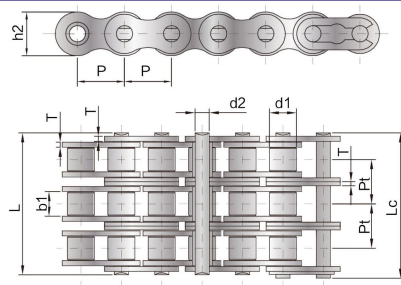


B 系列短节距三排精密滚子链
Short Pitch precision triplex roller chain (B series)

GL Chain No	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Weight Per Meter
链号	P	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	每米重量
		d1	b1	d2	L	Lc	h2	T	Pt	Q	q
ISO	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
*SS05B-3	8.000	5.00	3.00	2.31	19.50	20.20	7.10	0.80	5.64	10.50	0.48
*SS06B-3	9.525	6.35	5.72	3.28	33.50	34.60	8.20	1.30	10.24	18.90	1.16
SS08B-3	12.700	8.51	7.75	4.45	45.10	46.10	11.80	1.00	13.92	37.80	2.03
SS10B-3	15.875	10.16	9.65	5.08	52.70	54.10	14.70	1.60	16.59	47.04	2.77
SS12B-3	19.050	12.07	11.68	5.72	61.50	63.10	16.00	1.85	19.46	60.90	3.46
SS16B-3	25.400	15.88	17.02	8.28	99.80	101.20	21.00	4.15/3.1	31.88	126.00	8.13
SS20B-3	31.750	19.05	19.56	10.19	114.20	117.90	26.40	4.5/3.5	36.45	181.50	10.82
SS24B-3	38.100	25.04	25.40	14.63	150.10	154.60	33.20	6.0/4.8	48.36	320.04	20.10
SS28B-3	44.450	27.94	30.99	15.90	184.20	188.70	36.70	7.5/6.0	59.56	390.00	24.92
SS32B-3	50.800	29.21	30.99	17.81	183.20	188.20	42.00	7.0/6.0	58.55	465.00	31.56
SS40B-3	63.500	39.37	38.10	22.89	226.80	233.80	52.96	8.5/8.0	72.29	680.10	48.10
SS48B-3	76.200	48.26	45.72	29.24	281.60	289.40	63.80	12.0/10.0	91.21	979.50	75.00

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

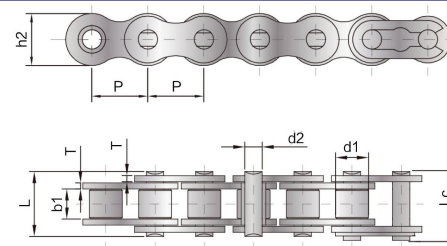


加重系列滚子链
Heavy duty series roller chain

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	平均拉伸载荷	每米重量
			d1	b1	d2	L	Lc	h2	T	Pt	Q	Q0	q
ISO	ANSI	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
SS08AH-1	SS40H-1	12.700	7.95	7.85	3.96	18.80	19.90	12.00	2.03	-	9.87	13.37	0.82
SS10AH-1	SS50H-1	15.875	10.16	9.40	5.08	22.10	23.40	15.09	2.42	-	15.54	21.14	1.25
SS12AH-1	SS60H-1	19.050	11.91	12.57	5.94	29.20	31.00	18.00	3.25	-	22.26	29.89	1.87
SS16AH-1	SS80H-1	25.400	15.88	15.75	7.92	36.20	37.70	24.00	4.00	-	39.69	49.98	3.10
SS20AH-1	SS100H-1	31.750	19.05	18.90	9.53	43.60	46.90	30.00	4.80	-	61.95	78.68	4.52
SS24AH-1	SS120H-1	38.100	22.23	25.22	11.10	53.50	57.50	35.70	5.60	-	72.50	112.63	6.60
SS28AH-1	SS140H-1	44.450	25.40	25.22	12.70	57.60	62.20	41.00	6.40	-	94.00	152.11	8.30
SS32AH-1	SS160H-1	50.800	28.58	31.55	14.27	68.20	73.00	47.80	7.20	-	118.68	200.06	10.30
SS36AH-1	SS180H-1	57.150	35.71	35.48	17.46	75.90	81.60	53.60	8.00	-	177.67	239.26	14.83
SS40AH-1	SS200H-1	63.500	39.68	37.85	19.85	86.60	93.50	60.00	9.50	-	229.64	311.15	19.16
SS48AH-1	SS240H-1	76.200	47.63	47.35	23.81	109.61	115.90	72.30	12.70	-	330.40	435.75	30.40

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

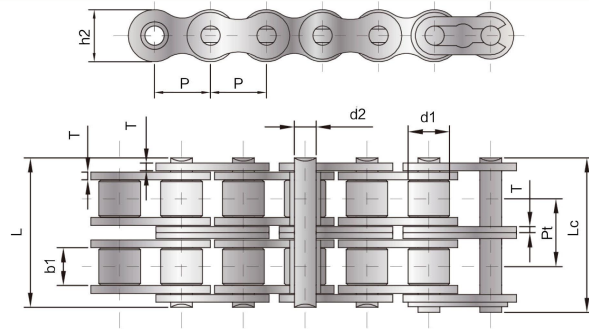


加重系列滚子链
Heavy duty series roller chain

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter	
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	平均拉伸载荷	每米重量	
		P	d1	b1	d2	L	Lc	h2	T	Pt	Q	Q0	q	
ISO	ANSI	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m	
SS12AH-2		SS60H-2	19.050	11.91	12.57	5.94	55.30	57.10	18.00	3.25	26.11	44.52	59.15	3.71
SS16AH-2		SS80H-2	25.400	15.88	15.75	7.92	68.80	70.30	24.00	4.00	32.59	79.38	101.71	6.15
SS20AH-2		SS100H-2	31.750	19.05	18.90	9.53	82.70	86.00	30.00	4.80	39.09	123.90	158.13	9.03
SS24AH-2		SS120H-2	38.100	22.23	25.22	11.10	102.40	106.40	35.70	5.60	48.87	145.00	225.89	13.13
SS28AH-2		SS140H-2	44.450	25.40	25.22	12.70	109.80	114.40	41.00	6.40	52.20	188.00	306.39	16.60
SS32AH-2		SS160H-2	50.800	28.58	31.55	14.27	130.10	134.90	47.80	7.20	61.90	237.36	400.12	20.20
SS36AH-2		SS180H-2	57.150	35.71	35.48	17.46	146.50	155.60	53.60	8.00	69.16	355.34	476.00	29.20
SS40AH-2		SS200H-2	63.500	39.68	37.85	19.85	164.90	171.80	60.00	9.50	78.31	459.28	626.22	38.11
SS48AH-2		SS240H-2	76.200	47.63	47.35	23.81	212.60	223.10	72.30	12.70	101.22	660.80	840.00	60.50

* 表格链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

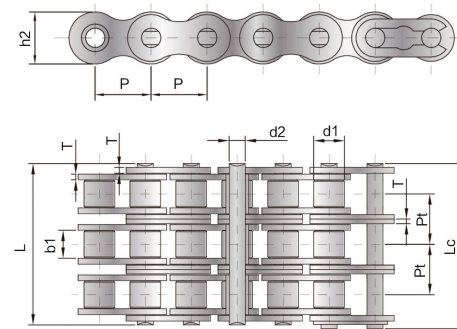


加重系列滚子链
Heavy duty series roller chain

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates		Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	T	排距	极限拉伸载荷	平均拉伸载荷	每米重量
		P	d1	b1	d2	L	Lc	h2	max		max	Pt	Q	Q0
ISO	ANSI	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
SS12AH-3		SS60H-3	19.050	11.91	12.57	5.94	81.40	83.20	18.00	3.25	26.11	66.78	113.90	5.54
SS16AH-3		SS80H-3	25.400	15.88	15.75	7.92	101.40	102.90	24.00	4.00	32.59	119.07	142.88	9.42
SS20AH-3		SS100H-3	31.750	19.05	18.90	9.53	121.80	125.10	30.00	4.80	39.09	185.85	223.02	12.96
SS24AH-3		SS120H-3	38.100	22.23	25.22	11.10	151.20	155.20	35.70	5.60	48.87	217.50	311.29	19.64
SS28AH-3		SS140H-3	44.450	25.40	25.22	12.70	162.00	166.60	41.00	6.40	52.20	282.00	418.88	24.90
SS32AH-3		SS160H-3	50.800	28.58	31.55	14.27	192.00	196.80	47.80	7.20	61.90	356.04	551.11	30.10
SS36AH-3		SS180H-3	57.150	35.71	35.48	17.46	215.70	224.80	53.60	8.00	69.16	533.04	707.70	44.10
SS40AH-3		SS200H-3	63.500	39.68	37.85	19.85	243.20	250.10	60.00	9.50	78.31	688.92	859.74	57.06
SS48AH-3		SS240H-3	76.200	47.63	47.35	23.81	313.80	324.30	72.30	12.70	101.22	991.20	1155.00	91.00

* 表格链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

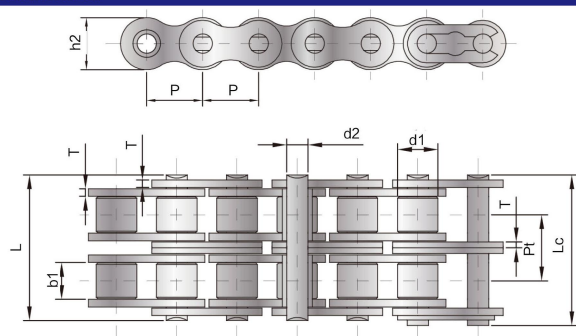


加重系列滚子链
Heavy duty series roller chain

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Transverse Pitch	Ultimate Tensile Strength	Average Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	平均拉伸载荷	每米重量
		P	d1	b1	d2	L	Lc	h2	T	Pt	Q	Q0	q
ISO	ANSI	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	Kg/m
SS04BH-1	-	6.000	4.00	2.80	1.85	8.40	9.40	5.00	0.90	-	2.10	4.00	0.14
*SS06BH-1	-	9.525	6.32	5.72	3.58	14.40	15.40	8.20	1.60	-	6.30	9.05	0.51
SS08BH-1	-	12.700	8.51	7.85	4.45	18.80	19.90	11.80	2.03	-	12.60	16.58	0.79
SS10BH-1	-	15.875	10.16	9.65	5.08	20.20	21.60	14.70	1.85	-	15.68	20.13	1.03
SS12BH-1	-	19.050	12.07	11.68	5.94	25.20	26.80	16.00	2.42	-	20.30	32.20	1.45
SS12BV-1	-	19.050	12.07	11.68	6.10	24.50	26.50	16.00	2.42	-	42.00	28.98	1.43
SS16BH-1	-	25.400	15.88	17.02	8.90	35.70	38.90	24.10	4.0/3.1	-	60.50	64.40	3.11
SS24BH-1	-	38.100	25.40	25.40	14.63	58.60	63.40	36.20	7.5/6.0	-	106.80	181.70	9.00

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

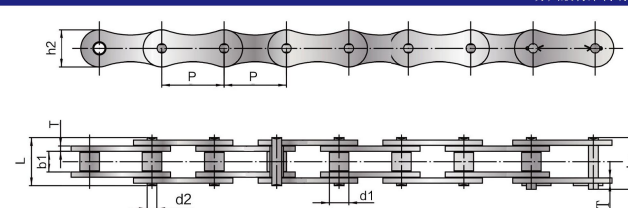


双节距传动链
Double pitch driving chain

GL Chain No		Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
链号		节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸载荷	每米重量
		P	d1	b1	d2	L	Lc	h2	T	Q	q
ISO	ANSI	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
SS208A	SSA2040	25.40	7.95	7.85	3.96	16.60	17.80	12.00	1.50	9.87	0.42
SS210A	SSA2050	31.75	10.16	9.40	5.08	20.70	22.20	15.09	2.03	15.54	0.73
SS212A	SSA2060	38.10	11.91	12.57	5.94	25.90	27.70	18.00	2.42	22.26	1.02
SS216A	SSA2080	50.80	15.88	15.75	7.92	32.70	35.00	24.00	3.25	39.69	1.70
SS220A	SSA2100	63.50	19.05	18.90	9.53	40.40	44.70	30.00	4.00	61.95	2.55
SS224A	SSA2120	76.20	22.23	25.22	11.10	50.30	54.30	35.70	4.80	72.50	4.06
SS208B		25.40	8.51	7.75	4.45	16.70	18.20	11.80	1.60	12.60	0.45
SS210B		31.75	10.16	9.65	5.08	19.50	20.90	14.70	1.70	15.68	0.65
SS212B		38.10	12.07	11.68	5.72	22.50	24.20	16.00	1.85	20.30	0.76
SS216B		50.80	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	42.00	1.75
SS220B		63.50	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	60.50	2.62
SS224B		76.20	25.04	25.40	14.63	53.40	57.80	33.20	6.0/4.8	106.80	4.70
SS232B		101.60	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	155.00	6.72

* 套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

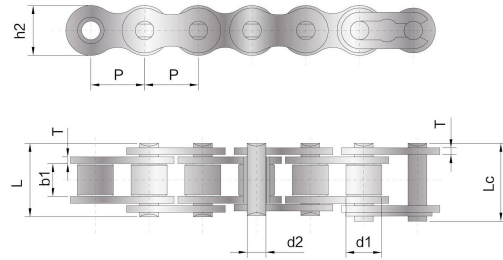


其它单排滚子链
Other single roller chain

GL Chain No.	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸载荷	每米重量
		d1	b1	d2	L	Lc	h2	T	Q	q
ISO	P	max	min	max	max	max	max	max	min	
SS04BH	6.000	4.00	2.80	1.85	8.40	9.40	5.00	0.90	5.00	0.14
SS081	12.700	7.75	3.30	3.66	9.30	12.30	9.90	1.00	8.00	0.28
SS084	12.700	7.75	4.88	4.09	14.60	17.60	11.50	1.80	15.60	0.51
SS415	12.700	7.77	4.76	3.60	11.00	12.40	9.70	1.00	6.86	0.32
SS415H	12.700	7.77	4.76	3.96	13.10	14.50	12.00	1.50	14.40	0.55
SS415B/ SS083	12.700	7.75	4.88	4.09	12.90	14.40	10.30	1.30	12.00	0.44
SS415BF1	12.700	7.75	4.88	4.09	11.50	13.00	10.30	1.00	9.00	0.38
SS423	12.700	8.51	6.40	4.45	15.60	17.10	12.40	1.70	19.60	0.71
SS478	12.700	7.80	4.80	4.00	11.60	13.65	10.46	1.25	9.80	0.39

*套筒链 d1 表示套筒外径
*d1 in the table indicate the external diameter of bushing

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

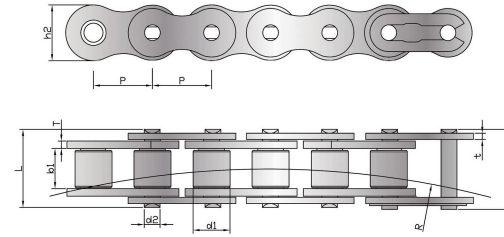

侧弯链
Side bow chain

GL Chain No.	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter	Pin Length		Inner Plate Height	Plate Thickness	Ultimate Tensile Strength	Side Bow Radius	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸载荷	侧弯半径	每米重量
		d1	b1	d2	L	Lc	h2	T/t	Q	R	q
ISO	P	max	min	max	max	max	max	max	min	min	
SS40SB	12.700	7.95	7.85	3.96	16.90	18.10	11.70	1.50	9.66	350.00	0.80
SS43SB	12.700	7.95	7.85	3.45	18.30	19.50	11.70	1.50	8.40	305.00	0.64
SS50SB	15.875	10.16	9.40	4.37	20.70	22.70	14.90	2.03	14.42	400.00	1.09
SS60SB	19.050	11.91	12.57	5.34	26.60	28.40	18.00	2.42	10.99	500.00	1.54
SS63SB	19.050	11.91	12.68	5.08	28.80	30.60	17.20	2.42/2.03	8.75	350.00	1.40
SS80SB	25.400	15.88	15.75	7.19	34.00	37.30	24.00	3.25	28.63	711.00	2.60
SS08SB	12.700	8.51	7.75	3.97	17.40	18.70	11.80	1.60	9.80	400.00	0.70
SS08BSBF1	12.700	8.51	7.75	3.97	16.30	17.60	11.80	1.6/1.2	8.96	400.00	0.65
SS10SB	15.875	10.16	9.65	4.50	20.10	21.50	14.70	1.70	10.92	400.00	0.93
SS12SB	19.050	12.07	11.68	5.12	23.10	24.80	16.00	1.85	14.35	500.00	1.16
SS16SB	25.400	15.88	17.22	7.90	36.50	39.70	21.00	3.7/3.0	38.92	500.00	2.53
SSC2060SB	31.750	10.16	9.40	5.08	21.30	22.60	15.00	2.03	15.26	800.00	0.84

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel