




www.goodlucktransmission.com

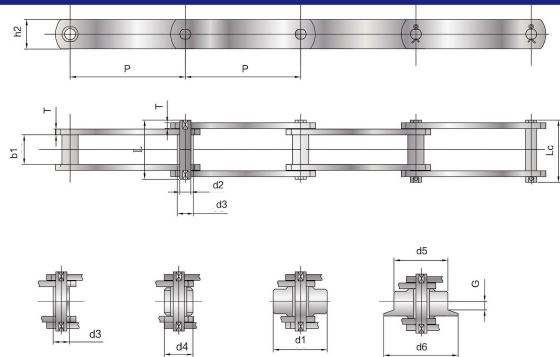

FV 系列输送链
Conveyor chain (FV Series)


GL Chain No	Pitch 节距						Roller Diameter 滚子直径					Bush Diameter 套筒直径
	P						d1 max	d4 max	d5 max	d6 max	G	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
SSFV40	50.000	63.000	80.00	100.00	125.00		32.0	20.0	40.0	50.0	4.00	15.00
SSFV63	50.000	63.000	80.00	100.00	125.00	160.00	40.0	26.0	50.0	63.0	5.00	18.00
SSFV90	63.000	80.000	100.00	125.00	160.00	200.00	48.0	30.0	63.0	78.0	6.50	20.00
SSFV112	80.000	100.000	125.00	160.00	200.00	250.00	55.00	32.0	72.0	90.0	7.50	22.00
SSFV140	63.000	100.000	125.00	160.00	200.00	250.00	60.0	36.0	80.0	100.0	9.00	26.00
SSFV180	100.000	125.000	160.00	200.00	250.00	315.00	70.0	42.0	100.0	125.0	13.00	30.00
SSFV250	125.000	160.000	200.00	250.00	315.00	400.00	80.0	50.0	125.0	155.0	15.00	36.00
SSFV315	160.000	200.000	250.00	315.00	400.00		90.0	60.0	140.0	175.0	18.00	42.00

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM, PA6
Roller material available: POM, PA6



苏州股特来传动科技有限公司

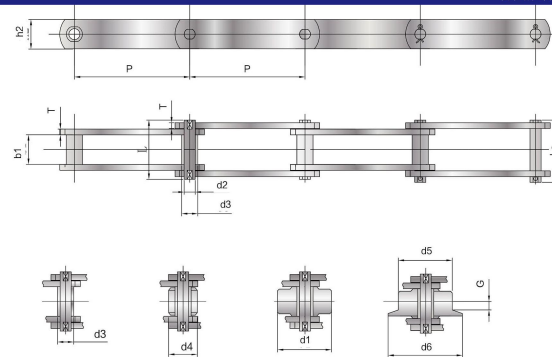


FV 系列输送链
Conveyor chain (FV Series)

GL Chain No	Width Between Inner Plates	Pin Diameter	Pin Length		Plate Height	Plate Thickness	Ultimate Tensile Strength
链号	内节内宽	销轴直径	销轴长度		链板高度	链板厚度	极限拉伸载荷
	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min
	mm	mm	mm	mm	mm	mm	KN
SSFV40	18.0	10.0	36.0	39.0	25.0	3.0	28.00
SSFV63	22.0	12.0	45.0	48.5	30.0	4.0	44.10
SSFV90	25.0	14.0	53.0	56.5	35.0	5.0	63.00
SSFV112	30.0	16.0	62.0	66.0	40.0	6.0	78.40
SSFV140	35.0	18.0	67.0	71.5	45.0	6.0	98.00
SSFV180	45.0	20.0	86.0	92.0	50.0	8.0	126.00
SSFV250	55.0	26.0	97.0	103.5	60.0	8.0	175.00
SSFV315	65.0	30.0	113.0	126.5	70.0	10.0	220.50

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM, PA6
Roller material available: POM, PA6

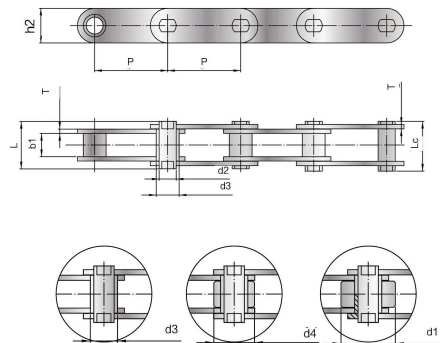


FV 系列输送链
Conveyor chain (FV Series)

GL Chain No	Pitch	Roller Diameter				Pin Diameter	Pin Length	Plate Height	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径				销轴直径	销轴长度	链板高度	链板厚度	极限拉伸载荷	米重
	P	d1 max	d3 max	d4 max	d2 max	L max	Lc max	h2 max	t/T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/M
SSFV 40-63	63.00	32.00	-	-	10.00	38.10	41.50	45.00	4.00	56.000	2.13
SSFV 90F9-100	100.00	-	20.000	-	14.00	60.20	64.60	35.00	6.0/8.0	63.000	6.00
SSFV 90F10-100	100.00	-	20.000	-	14.00	60.20	64.60	40.00	6.0/8.0	63.000	6.83
SSFV 140-PF1-125	125.00	65.00	-	-	18.00	67.00	71.50	45.00	6.00	98.000	12.76

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM,PA6
Roller material available: POM, PA6

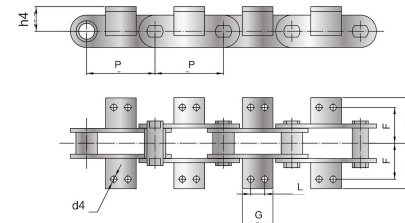

FV 系列带附件输送链
Conveyor chain with attachment (FV Series)

Attachment Dimension 附件尺寸							
GL Chain No	P	L	G	d4	F	W	h4
链号	mm	mm	mm	mm	mm	mm	mm
SSFV40	50	-	45	6.50	25.0	40.5	20.0
	63	-	31				
	80	25	45				
	100	30	50				
	125	30	60				
SSFV63	63	-	40	8.40	34.0	50.0	30.0
	80	25	45				
	100	30	50				
	125	40	60				
	160	50	70				
SSFV90	63	-	30	8.40	40.0	64.0	35.0
	80	25	45				
	100	30	50				
	125	40	60				
	160	50	70				
	200	60	80				
SSFV112	250	65	85	11.0	50.0	70.0	40.0
	100	30	50				
	125	40	65				
	160	50	75				
	200	65	90				
	250	80	105				


链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM,PA6
Roller material available: POM, PA6

- 单孔
- One hole



www.goodlucktransmission.com

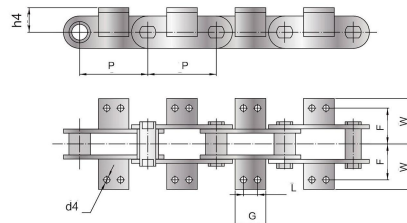

FV 系列带附件输送链
Conveyor chain with attachment (FV Series)

Attachment Dimension
附件尺寸

GL Chain No 链号	P mm	L mm	G mm	d4 mm	F mm	W mm	h4 mm
SSFV140	100	30	55	11	50	81	45
	125	40	65				
	160	50	75				
	200	65	90				
	250	80	105				
SSFV180	125	35	63	13	64	91	45
	160	50	80				
	200	65	95				
	250	80	110				
	315	100	130				
SSFV250	160	50	80	14	69	106	55
	200	65	95				
	250	80	110				
	315	100	130				
	400	100	130				
SSFV315	160	*	50	14	85	130	60
	200	65	95				
	250	80	110				
	315	100	130				
	400	100	130				

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM, PA6
Roller material available: POM, PA6

— 单孔
— One hole