



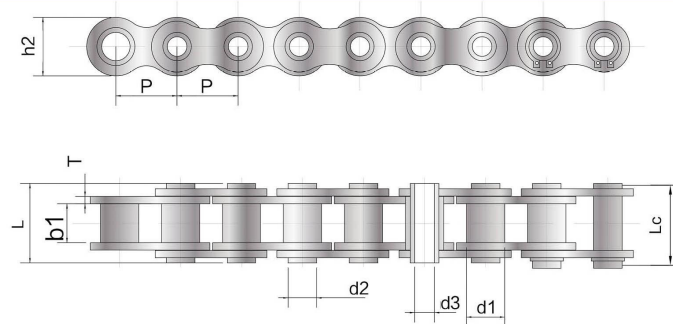

空心销轴链 Hollow pin chain

GL Chain No	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter		Pin Length		Inner Plate Height	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	极限拉伸载荷	每米重量
	P	d1	b1	d2	d3	L	Lc	h2	T	Q	q.
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
SS40HP	12.700	7.95	7.85	5.94	4.00	16.60	17.50	12.00	1.50	7.70	0.54
SS08BHP	12.700	8.51	7.75	6.32	4.50	16.80	17.60	12.15	1.60	7.80	0.52
SS50HP	15.875	10.16	9.40	7.03	5.10	20.75	22.20	15.09	2.00	14.00	0.91
SS60HP	19.050	11.91	12.70	8.31	6.00	26.85	26.80	18.00	2.42	16.80	1.29
SS80HP	25.400	15.88	15.75	11.10	8.10	32.60	34.00	24.00	3.15	35.00	2.26
SSA2080HP	50.800	15.88	15.75	11.10	8.010	32.60	34.00	24.00	3.15	29.60	1.60
SS10BHP	15.875	10.16	9.65	7.01	5.10	19.60	20.50	14.85	1.70	11.90	0.96
SS12BHP	19.050	12.07	11.68	8.02	6.00	22.60	23.90	16.50	1.85	16.52	1.09
SSHB38.1	38.100	20.00	8.00	8.00	5.30	19.60	20.70	17.30	2.00	19.60	0.98
SSHP50.8	50.800	26.00	15.88	20.00	14.30	41.00	42.20	38.10	4.80	70.00	5.32
SSHB50.8	50.800	30.00	10.50	11.40	8.20	27.40	28.60	26.00	3.10	35.00	2.56

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

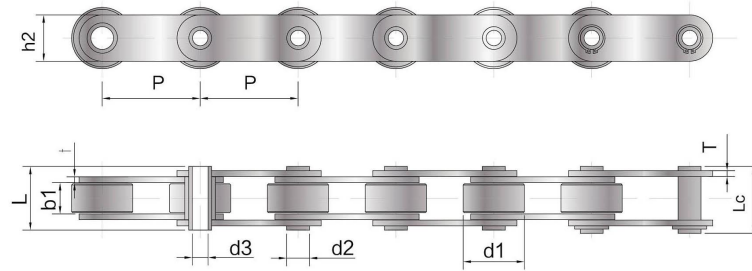


空心销轴链 Hollow pin chain

GL Chain No	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter		Pin Length		Inner Plate Height	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	极限拉伸载荷	每米重量
	P	d1	b1	d2	d3	L	Lc	h2	T	Q	q.
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
SSC2040HP	25.400	7.95	7.85	5.94	4.00	16.60	17.50	12.00	1.50	7.7/1750	0.46
SSC2050HP	31.750	10.16	9.40	7.03	5.10	20.75	22.20	15.00	2.00	14.28/3245.2	0.76
SSC2060HP	38.100	11.91	12.70	8.31	6.00	25.85	26.80	18.00	2.42	16.8/3818.5	1.02
SSC2080HP	50.800	15.88	15.75	11.10	8.10	32.60	34.00	24.00	3.15	35/7954.8	1.81
SSC2060H-HP	38.100	11.91	12.70	8.31	6.00	29.25	30.50	18.00	3.15	24/5455	1.29
SSC40HP	12.700	7.95	7.85	5.94	4.00	16.60	17.50	12.00	1.50	7.7/1750	0.64
SSC50HP	15.875	10.16	9.40	7.03	5.10	20.75	22.20	15.09	2.00	14/3181.5	1.05
SSC60HP	19.050	11.91	12.70	8.31	6.00	25.85	26.80	18.00	2.42	16.8/3818.5	1.52
SSC80HP	25.400	15.88	15.75	11.10	8.10	34.00	33.80	24.00	3.15	35/7954.8	2.63
SSC08BHP	12.700	8.51	7.75	6.32	4.50	16.80	17.60	12.15	1.6	7.7/1750	0.62

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM,PA6
Roller material available: POM, PA6

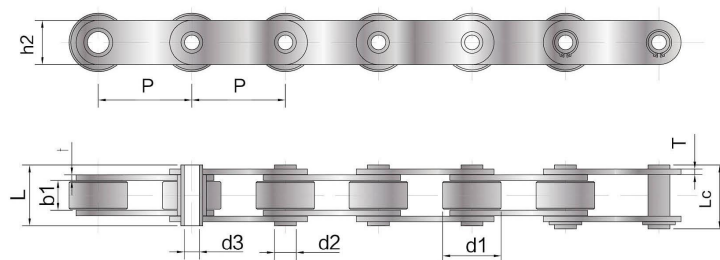

空心销轴链 Hollow pin chain

GL Chain No	Pitch	Roller Diameter	Width Between Inner Plates	Pin Diameter		Pin Length		Inner Plate Height	Plate Thickness	Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子直径	内节内宽	销轴直径		销轴长度		内链板高度	链板厚度	极限拉伸载荷	每米重量
	P	d1	b1	d2	d3	L	Lc	h2	T	Q	q
	max	min	max	max	max	max	max	max	max	min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
SSC2042HP	25.400	15.88	7.85	5.94	4.00	16.60	17.50	12.00	1.50	7.70	0.78
SSC2052HP	31.750	19.05	9.53	7.03	5.10	20.75	22.20	15.00	2.00	14.28	1.25
SSC2062HP	38.100	22.23	12.70	8.31	6.00	25.85	26.80	18.00	2.42	16.80	1.72
SSC2082HP	50.800	28.58	15.75	11.10	8.00	32.60	34.00	24.00	3.15	35.00	2.82
SSC2042H-HP	25.400	15.88	7.85	5.94	4.00	19.20	20.00	12.00	2.00	7.70	0.95
SSC2052H-HP	31.750	19.05	9.53	7.03	5.10	22.60	24.00	15.00	2.42	14.26	1.44
SSC2062H-HP	38.100	22.23	12.70	8.31	6.00	29.25	30.50	18.00	3.15	16.80	1.99
SSC2082H-HP	50.800	28.58	15.75	11.10	8.10	35.70	37.00	24.00	4.00	35.00	3.34
SSHP50.8	50.800	26.00	15.88	20.00	14.30	41.00	42.20	38.10	4.80	70.00	5.32

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM,PA6
Roller material available: POM, PA6