





链条材质: 300,400,600 系列不锈钢  
Material: 300,400,600 series stainless steel

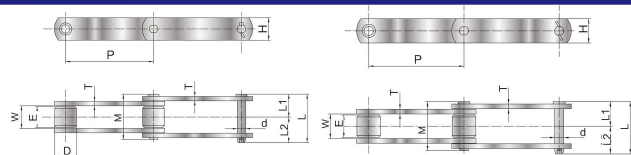

鏈條材質: 300,400,600 系列不銹鋼  
Material: 300,400,600 series stainless steel


RF 系列输送链  
RF type conveyor chain

| Plate<br>链板 |              | Pin<br>销轴 |       |      | Weight Per Meter<br>每米重量 |                  |                  |                  | Attachment Type<br>附件型式 |             |             |                     |                             |       |             |     |
|-------------|--------------|-----------|-------|------|--------------------------|------------------|------------------|------------------|-------------------------|-------------|-------------|---------------------|-----------------------------|-------|-------------|-----|
| H           | T            | d         | L1+L2 | L1   | L2                       | R roller<br>R 滚子 | F roller<br>F 滚子 | S roller<br>S 滚子 | M/N roller<br>M/N 滚子    | A-1<br>K-1  | A-2<br>K-2  | Welded<br>A-2<br>焊接 | Welded<br>A-3<br>SK-2<br>焊接 | G-2   | G-4         |     |
|             |              |           |       |      |                          | kg/m             | kg/m             | kg/m             | kg/m                    |             |             |                     |                             |       |             |     |
| 22          | 3.2          | 8         | 38    | 18   | 20                       | 2.7              | 2.8              | 1.9              | —                       | R/F/S       | R/F/S       |                     |                             | R/S   |             |     |
|             |              |           |       |      |                          | 2.3              | 2.4              | 1.7              | —                       |             |             |                     |                             |       |             |     |
| 25.4        | 4.8<br>(5.0) | 9.7       | 55    | 25.5 | 29.5                     | 4.3              |                  | 3.0              |                         | R/S         | R/S         |                     |                             | R/S   |             |     |
|             |              |           |       |      |                          | —                | —                | 4.2              | —                       | S           | S           |                     |                             |       |             |     |
|             |              |           |       |      |                          | 5                | 5.2              | 3.7              | —                       | R/F/S       | R/F/S       |                     |                             |       |             |     |
|             |              |           |       |      |                          | 4.1              | 4.1              | 3.2              | —                       | R/F/S       | R/F/S       |                     |                             | R/S   |             |     |
|             |              |           |       |      |                          |                  |                  |                  |                         |             |             |                     |                             | R/S/M |             |     |
| 28.6        | 6.3<br>(6.0) | 11.3      | 65.5  | 31   | 34.5                     | —                | —                | 5.6              | —                       | S           | S           |                     |                             |       |             |     |
|             |              |           |       |      |                          |                  |                  |                  |                         | R/F/S/<br>M | R/F/S/<br>M |                     |                             | R/S/M |             |     |
| 28.6        | 6.3<br>(6.0) | 11.3      | 65.5  | 31   | 34.5                     | 5.5              | 5.6              | 4                | 4.2                     | R/F/S/<br>M | R/F/S/<br>M |                     |                             | R/S/M |             |     |
|             |              |           |       |      |                          |                  |                  |                  |                         | R/F/S/<br>M | R/F/S/<br>M |                     |                             | R/S/M | R/S/M       | S/M |
| 38.1        | 6.3<br>(6.0) | 11.3      | 69    | 32.5 | 36.5                     | 7.7              | 8.0              | 6                | 6.4                     | R/F/S/<br>M | R/F/S/<br>M |                     |                             | R/S/M | R/S/M       | S/M |
|             |              |           |       |      |                          | 9.8              | —                | 6.8              | 7.1                     | R/S/M       | R/S/M       |                     |                             | R/S/M | R/F/S/<br>M | S/M |
|             |              |           |       |      |                          | 7.9              | 8.1              | 5.9              | 6.1                     | R/F/S/<br>M | R/F/S/<br>M |                     |                             | R/S/M | R/F/S/<br>M | S/M |
| 38.1        | 7.9          | 15.9      | 77.5  | 37.5 | 40                       | 10.4             | —                | 8.7              | 9.1                     | R/S/M       | R/S/M       |                     |                             | R/S/M |             |     |
|             |              |           |       |      |                          |                  |                  |                  |                         |             | S           |                     |                             |       |             |     |
| 38.1        | 7.9          | 15.9      | 83.5  | 40.5 | 43                       | —                | —                | 10.4             | —                       |             |             |                     |                             |       |             |     |
|             |              |           |       |      |                          |                  |                  |                  |                         | R/F/S/<br>M | R/F/S/<br>M |                     |                             | R/S/M | R/F/S/<br>M | S/M |
| 44.5        | 7.9          | 15.9      | 83.5  | 40.5 | 43                       | 12.1             | 12.4             | 9.3              | 9.6                     |             |             |                     |                             | R/S/M | R/F/S/<br>M | S/M |
|             |              |           |       |      |                          |                  |                  |                  |                         |             |             |                     |                             |       |             |     |
| 44.5        | 7.9          | 15.9      | 83.5  | 40.5 | 43                       | 11.4             | 11.9             | 8.4              | 8.7                     | R/F/S/<br>M | R/F/S/<br>M |                     |                             | R/S/M | R/F/S/<br>M | S/M |
|             |              |           |       |      |                          | 10.3             | 10.6             | 7.8              | 8.0                     |             |             |                     |                             |       |             |     |
| 50.8        | 9.5<br>(10)  | 19.1      | 95.5  | 44.5 | 51                       | 17.1             | —                | 12.6             | 13.1                    | R/S/M       | R/S/M       |                     |                             | R/S/M |             |     |
|             |              |           |       |      |                          |                  |                  |                  |                         |             |             |                     |                             |       |             |     |
| 50.8        | 9.5<br>(10)  | 19.1      | 109.5 | 51.5 | 58                       | 18.8             | 19.8             | 12.3             | 12.6                    | R/F/S/<br>M | R/F/S/<br>M |                     |                             | R/S/M | R/F/S/<br>M | S/M |
|             |              |           |       |      |                          | 16.5             | 17.3             | 11.1             | 11.6                    |             |             |                     |                             |       |             |     |

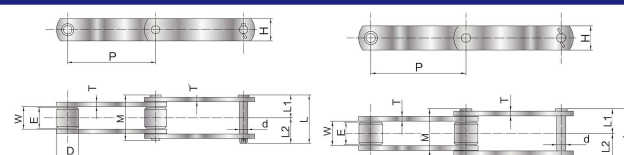链条材质: 300,400,600 系列不锈钢  
Material: 300,400,600 series stainless steelRF 系列输送链  
RF type conveyor chain

| Plate<br>链板 |             | Pin<br>销轴 |       |      | Weight Per Meter<br>每米重量 |                  |                  |                  | Attachment Type<br>附件型式 |            |            |                     |                             |     |     |  |
|-------------|-------------|-----------|-------|------|--------------------------|------------------|------------------|------------------|-------------------------|------------|------------|---------------------|-----------------------------|-----|-----|--|
| H           | T           | d         | L1+L2 | L1   | L2                       | R roller<br>R 滚子 | F roller<br>F 滚子 | S roller<br>S 滚子 | M/N roller<br>M/N 滚子    | A-1<br>K-1 | A-2<br>K-2 | Welded<br>A-2<br>焊接 | Welded<br>A-3<br>SK-2<br>焊接 | G-2 | G-4 |  |
|             |             |           |       |      |                          | kg/m             | kg/m             | kg/m             | kg/m                    |            |            |                     |                             |     |     |  |
| 50.8        | 9.5<br>(10) | 19.1      | 109.5 | 51.5 | 58                       | 15               | 15.7             | 10.5             | 10.9                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | —                | —                | 16               | 17                      |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 25.3             | 26.2             | 14.7             | 15.5                    |            |            |                     |                             |     |     |  |
| 63.5        | 9.5<br>(10) | 22.2      | 116.5 | 55.5 | 61                       | 22.3             | 23.6             | 13.8             | 14.5                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 18               | 18.9             | 12.4             | 12.9                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | —                | —                | 24.4             | 25.5                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          |                  |                  |                  |                         |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 39               | 40.1             | 22.9             | 23.8                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 30.7             | 31.9             | 20.2             | 20.8                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 26.9             | 27.8             | 19               | 19.5                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 48.8             | 52.5             | 29.7             | —                       |            |            |                     |                             |     |     |  |
| 76.2        | 16          | 31.8      | 172   | 82   | 90                       | 37.5             | 39.3             | 26.2             | —                       |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 32.9             | 34.3             | 24.4             | —                       |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 52.4             | 55.1             | —                | 31                      |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 47.2             | 49.5             | —                | 28.8                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 43.8             | 45.8             | —                | 27.7                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | —                | —                | —                | 47.6                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 71               | 74.4             | —                | 45.1                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 62.3             | 65               | —                | 41.6                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 105.7            | —                | —                | 63.9                    |            |            |                     |                             |     |     |  |
|             |             |           |       |      |                          | 83.3             | 88               | —                | 55.4                    |            |            |                     |                             |     |     |  |


链条材质: 300,400,600 系列不锈钢  
Material: 300,400,600 series stainless steel

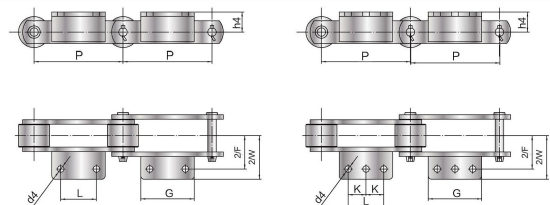

**RF 系列带附件输送链**  
RF type conveyor chain with attachment

| GL Chain No | Pitch | Attachment Dimension |     |     |     |     |    | Steel Angle | Bolt Dimension | Weight of A att. |
|-------------|-------|----------------------|-----|-----|-----|-----|----|-------------|----------------|------------------|
|             | 节距    | 附件尺寸                 |     |     |     |     |    |             |                |                  |
| 链号          | P     | h4                   | 2/F | 2W  | L   | G   | d4 | 角钢尺寸        | 螺栓尺寸           | KG               |
| RF17300     | 300   | 45                   | 75  | 111 | 180 | 220 | 15 | L65*65*6    | M12            | 1.34             |
| RF26300     | 300   | 55                   | 80  | 124 | 180 | 220 | 15 | L75*75*9    | M12            | 2.22             |
| RF60300     | 300   | 90                   | 115 | 165 | 110 | 160 | 24 | L100*100*13 | M20            | 3.30             |
| RF90350     | 350   | 100                  | 140 | 210 | 100 | 180 | 28 | L130*130*15 | M24            | 5.20             |
| RF90400     | 400   | 100                  | 140 | 210 | 150 | 230 | 28 | L130*130*15 | M24            | 6.60             |
| RF120400    | 400   | 120                  | 150 | 220 | 120 | 200 | 28 | L130*130*15 | M24            | 5.80             |
| RF26450     | 450   | 55                   | 80  | 124 | 140 | 320 | 15 | L75*75*9    | M14            | 3.26             |
| RF36450     | 450   | 70                   | 100 | 160 | 140 | 330 | 19 | L100*100*10 | M16            | 5.07             |
| RF36600     | 600   | 70                   | 100 | 160 | 180 | 410 | 19 | L100*100*10 | M16            | 6.26             |
| RF54450     | 450   | 80                   | 120 | 171 | 140 | 330 | 24 | L100*100*13 | M20            | 6.30             |
| RF52600     | 600   | 80                   | 120 | 171 | 180 | 410 | 24 | L100*100*13 | M20            | 7.80             |
| RF60350     | 350   | 90                   | 115 | 165 | 80  | 220 | 24 | L100*100*13 | M20            | 4.20             |
| RF60400     | 400   | 90                   | 115 | 165 | 100 | 260 | 24 | L100*100*13 | M20            | 6.00             |
| RF90500     | 500   | 100                  | 140 | 210 | 130 | 340 | 28 | L130*130*15 | M24            | 9.80             |
| RF120600    | 600   | 120                  | 150 | 220 | 160 | 400 | 28 | L130*130*15 | M24            | 11.50            |

链条材质: 300,400,600 系列不锈钢  
Material: 300,400,600 series stainless steel

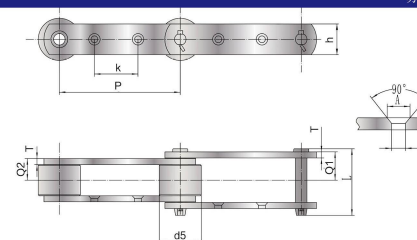


**RF 带附件输送链**  
RF type conveyor chain with attachment

| GL Chain No | Pitch | Attachment Dimension |      |      |      |    |    | Steel Angle   |               | Bolt Dimension |
|-------------|-------|----------------------|------|------|------|----|----|---------------|---------------|----------------|
|             | 节距    | 附件尺寸                 |      |      |      |    |    | 角钢            |               |                |
| 链号          | P     | K                    | T    | Q1   | Q2   | A  | 0  | Outer link 外节 | Inner link 内节 | 螺栓尺寸           |
| RF15100     | 100   | 40                   | 4.5  | 26.2 | 21.0 | 15 | 10 | 36            | 26            | M8             |
| RF05150     | 150   | 60                   | 4.5  | 26.2 | 21.0 | 15 | 10 | 36            | 26            | M8             |
| RF650       | 152.4 | 60                   | 6.3  | 28.5 | 21.5 | 20 | 12 | 49            | 35            | M10            |
| RF10100     | 100   | 30                   | 6.3  | 28.5 | 21.5 | 20 | 12 | 49            | 35            | M10            |
| RF10150     | 150   | 60                   | 6.3  | 28.5 | 21.5 | 20 | 12 | 49            | 35            | M10            |
| RF6205      | 152.4 | 50                   | 7.9  | 35.5 | 26.5 | 26 | 15 | 63            | 45            | M12            |
| RF12200     | 200   | 80                   | 7.9  | 35.5 | 26.5 | 26 | 15 | 63            | 45            | M12            |
| RF12250     | 250   | 125                  | 7.9  | 35.5 | 26.5 | 26 | 15 | 63            | 45            | M12            |
| RF17200     | 200   | 70                   | 9.5  | 45.5 | 35.0 | 26 | 15 | 81            | 61            | M12            |
| RF17250     | 250   | 110                  | 9.5  | 45.5 | 35.0 | 26 | 15 | 81            | 61            | M12            |
| RF17300     | 300   | 150                  | 9.5  | 45.5 | 35.0 | 26 | 15 | 81            | 61            | M12            |
| RF26300     | 300   | 140                  | 9.5  | 48.0 | 35.0 | 26 | 15 | 88            | 67            | M12            |
| RF26450     | 450   | 220                  | 9.5  | 48.0 | 35.0 | 26 | 15 | 88            | 67            | M12            |
| RF36450     | 450   | 220                  | 12.7 | 60.0 | 46.0 | 32 | 19 | 105           | 75            | M16            |
| RF36600     | 600   | 300                  | 12.7 | 60.0 | 46.0 | 32 | 19 | 105           | 75            | M16            |
| RF52450     | 450   | 200                  | 12.7 | 71.5 | 45.5 | 38 | 24 | 125           | 90            | M20            |
| RF52600     | 600   | 300                  | 16.0 | 71.5 | 45.5 | 38 | 24 | 125           | 90            | M20            |


链条材质: 300,400,600 系列不锈钢  
Material: 300,400,600 series stainless steel



SA2



SK2




**RF 系列带附件输送链**  
RF type conveyor chain with attachment


| GL Chain No | Pitch | Attachment Dimension |      |      |      |       |     |     |    |      | Bolt Dimension | Weight of attachment SA2 |
|-------------|-------|----------------------|------|------|------|-------|-----|-----|----|------|----------------|--------------------------|
|             |       |                      |      |      |      |       |     |     |    |      |                |                          |
|             |       | 附件尺寸                 |      |      |      |       |     |     |    |      |                |                          |
| 链号          | P     | C                    | F    | Q1   | Q2   | L     | G   | T   | d4 | 螺栓尺寸 | SA2 附件重量 KG    |                          |
| RF03075     | 75    | 33                   | 49.0 | 15.5 | 11.5 | 30.0  | 55  | 3.2 | 10 | M8   | 0.05           |                          |
| RF03100     | 100   | 33                   | 49.0 | 15.5 | 11.5 | 40.0  | 65  | 3.2 | 10 | M8   | 0.06           |                          |
| RF430       | 101.6 | 37.6                 | 51.6 | 22.0 | 16.0 | 40.0  | 70  | 4.8 | 12 | M10  | 0.11           |                          |
| RF05100     | 100   | 33.4                 | 50.7 | 21.0 | 15.5 | 40.0  | 65  | 4.5 | 10 | M8   | 0.08           |                          |
| RF05150     | 150   | 33.4                 | 50.7 | 21.0 | 15.5 | 60.0  | 85  | 4.5 | 10 | M8   | 0.10           |                          |
| RF450       | 101.6 | 47.6                 | 60.7 | 27.0 | 20.0 | 40.0  | 70  | 6.3 | 12 | M10  | 0.18           |                          |
| RF08150     | 150   | 46.1                 | 58.7 | 27.0 | 20.0 | 60.0  | 90  | 6.3 | 12 | M10  | 0.22           |                          |
| RF650       | 152.4 | 50                   | 63.0 | 28.5 | 21.5 | 60.0  | 90  | 6.3 | 12 | M10  | 0.22           |                          |
| RF10100     | 100   | 46.1                 | 61.0 | 28.5 | 21.5 | 40.0  | 70  | 6.3 | 12 | M10  | 0.16           |                          |
| RF10150     | 150   | 46.1                 | 61.0 | 28.5 | 21.5 | 60.0  | 90  | 6.3 | 12 | M10  | 0.20           |                          |
| RF210       | 101.6 | 50                   | 70.0 | 32.5 | 23.6 | 40.0  | 80  | 7.9 | 15 | M12  | 0.28           |                          |
| RF6205      | 152.4 | 55                   | 75.7 | 35.5 | 26.5 | 50.0  | 100 | 7.9 | 15 | M12  | 0.37           |                          |
| RF12200     | 200   | 55                   | 75.7 | 35.5 | 26.5 | 70.0  | 120 | 7.9 | 15 | M12  | 0.45           |                          |
| RF12250     | 250   | 55                   | 75.7 | 35.5 | 26.5 | 125.0 | 165 | 7.9 | 15 | M12  | 0.62           |                          |
| RF212       | 152.4 | 60                   | 83.6 | 38.0 | 28.0 | 60.0  | 100 | 9.5 | 15 | M12  | 0.49           |                          |

链条材质: 300,400,600 系列不锈钢  
Material: 300,400,600 series stainless steel


A1




K1



A2



K2



**RF 系列带附件输送链**  
RF type conveyor chain with attachment

| GL Chain No | Roller Type | Pitch | Attachment Dimension |     |     |    |     |     |     |           | Bolt Dimension | Weight of attachment SA2 |      |
|-------------|-------------|-------|----------------------|-----|-----|----|-----|-----|-----|-----------|----------------|--------------------------|------|
|             |             | 节距    | 附件尺寸                 |     |     |    |     |     |     |           |                |                          |      |
| 链号          | 滚子类型        | P     | h4                   | 2/F | F   | 2W | W   | L   | T   | d4        | 螺栓尺寸           | SA2 附件重量                 |      |
| RF0375      | R/F/S       | 75    | 20                   | 30  | 60  | 46 | 92  | 30  | 55  | 3.2       | 10             | M8                       | 0.05 |
| RF03100     | R/F/S       | 100   | 20                   | 30  | 60  | 46 | 92  | 40  | 65  | 3.2       | 10             | M8                       | 0.06 |
| RF430       | R/S         | 101.6 | 22                   | 40  | 80  | 54 | 108 | 40  | 70  | 4.8(5.0)  | 12             | M10                      | 0.11 |
| RF05075     | S           | 75    | 22                   | 35  | 70  | 47 | 94  | 30  | 55  | 4.5       | 10             | M8                       | 0.07 |
| RF05100     | R/F/S       | 100   | 22                   | 35  | 70  | 47 | 94  | 40  | 65  | 4.5       | 10             | M8                       | 0.08 |
| RF05150     | R/F/S       | 150   | 22                   | 35  | 70  | 47 | 94  | 60  | 85  | 4.5       | 10             | M8                       | 0.10 |
| RF204       | S           | 66.27 | 24                   | 45  | 90  | 59 | 118 | -   | 35  | 6.3(6.0)  | 12             | M10                      | 0.08 |
| RF450       | R/F/S/M     | 101.6 | 28                   | 50  | 100 | 64 | 128 | 40  | 70  | 6.3(6.0)  | 12             | M10                      | 0.18 |
| RF08150     | R/F/S/M     | 150   | 28                   | 50  | 100 | 64 | 128 | 60  | 90  | 6.3(6.0)  | 12             | M10                      | 0.22 |
| RF650       | R/F/S/M     | 152.4 | 32                   | 50  | 100 | 64 | 128 | 60  | 90  | 6.3(6.0)  | 12             | M10                      | 0.22 |
| RF10100     | R/S/M       | 100   | 28                   | 50  | 100 | 65 | 130 | 40  | 70  | 6.3(6.0)  | 12             | M10                      | 0.16 |
| RF10150     | R/F/S/M     | 150   | 28                   | 50  | 100 | 65 | 130 | 60  | 90  | 6.3(6.0)  | 12             | M10                      | 0.20 |
| RF214       | R/S/M       | 101.6 | 35                   | 55  | 110 | 73 | 146 | 40  | 80  | 7.9       | 15             | M12                      | 0.28 |
| RF205       | S           | 78.11 | 35                   | 60  | 120 | 75 | 150 | 30  | 65  | 7.9       | 12             | M10                      | 0.23 |
| RF6205      | R/F/S/M     | 152.4 | 38                   | 60  | 120 | 79 | 158 | 60  | 100 | 7.9       | 15             | M12                      | 0.37 |
| RF12200     | R/F/S/M     | 200   | 38                   | 60  | 120 | 79 | 158 | 80  | 120 | 7.9       | 15             | M12                      | 0.45 |
| RF12250     | R/F/S/M     | 250   | 38                   | 60  | 120 | 79 | 158 | 125 | 170 | 7.9       | 15             | M12                      | 0.62 |
| RF212       | R/S/M       | 152.4 | 45                   | 65  | 130 | 83 | 166 | 60  | 100 | 9.5(10.0) | 15             | M12                      | 0.49 |
| RF17200     | R/F/S/M     | 200   | 45                   | 75  | 150 | 98 | 196 | 80  | 120 | 9.5(10.0) | 15             | M12                      | 0.66 |
| RF17250     | R/F/S/M     | 250   | 45                   | 75  | 150 | 98 | 125 | 125 | 170 | 9.5(10.0) | 15             | M12                      | 0.86 |

链条材质: 300,400,600 系列不锈钢  
Material: 300,400,600 series stainless steel