



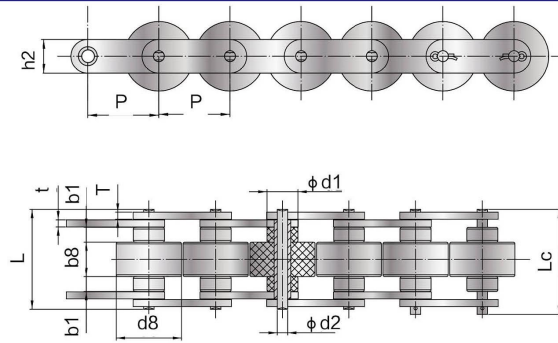

倍速链
Speed chain

GL Chain No		Pitch	Roller Dimension				Pin Diameter	Pin Length		Plate Dimension			Weight Per Meter
链号		节距	滚子尺寸				销轴直径	销轴长度		链板尺寸			每米重量
		P	d1 max	d8 max	b1 max	b8 max	d2 max	L max	Lc max	h2 max	T max	t max	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kg/m
SSC2030W	BS25-C206B	19.05	11.91	18.3	4.00	8.0	3.28	24.0	25.6	8.20	1.30	1.50	0.52
SSC2040W	BS25-C208A	25.40	15.88	24.6	5.70	10.3	3.96	31.0	32.8	11.70	1.50	1.50	0.79
SSC2050W	BS25-C210A	31.75	19.05	30.6	7.10	13.0	5.08	39.5	41.2	15.00	2.03	2.03	1.36
SSC2060HW	BS25-C212A	38.100	22.23	36.6	8.50	15.5	5.94	48.8	51.5	18.00	3.25	3.25	2.19
SSC2080W	BS25-C216A	50.80	28.58	49.0	11.00	21.5	7.92	66.2	70.0	24.00	4.00	5.00	4.06
	BS30-C206B	19.05	9.00	18.3	4.50	9.1	3.28	26.3	29.6	7.28	1.30	1.50	0.50
	BS30-C208A	25.40	11.91	24.6	6.10	12.5	3.96	35.6	39.5	9.60	1.50	2.00	0.83
	BS30-C210A	31.75	14.80	30.6	7.50	15.0	5.08	43.0	47.1	12.20	2.00	2.40	1.27
	BS30-C212A	38.10	18.00	37.0	9.75	20.0	5.94	58.1	62.7	15.00	3.00	4.00	2.14
	BS30-C216A	50.80	22.23	49.0	12.00	25.2	7.92	71.9	77.3	18.60	4.00	5.00	3.55

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

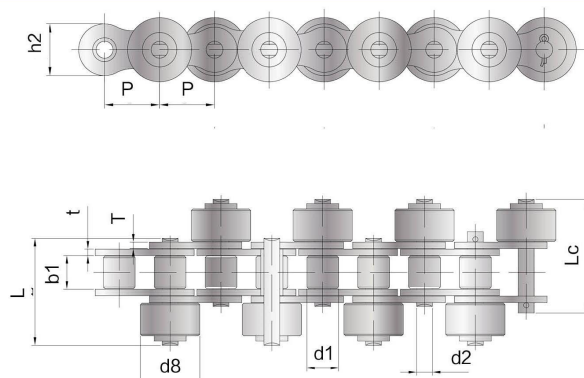


倍速链 Speed chain

GL Chain No	Pitch	Roller Dimension		Width Between Inner Plates	Pin Diameter	Pin Length		Plate Dimension		Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子尺寸		内节内宽	销轴直径	销轴长度		链板尺寸		极限拉伸载荷	每米重量
	P	d1 max	d8 max	b1 min	d2 max	L max	Lc max	h2 max	T/t max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
SS40S	12.700	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	9.66	0.9
SS40-PSR	12.700	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	9.66	1.6
SS50-SR-C	15.875	10.16	19.05	9.40	5.08	31.8	34.0	15.1	2.03	15.26	2.4
SS60S	19.050	11.91	22.23	12.57	5.94	40.0	42.5	18.0	2.42	22.26	1.9
SS80S	25.400	15.88	28.58	15.75	7.92	51.3	54.3	24.0	3.25	39.69	3.6
SS80S-C	25.400	15.88	28.58	15.75	7.92	51.3	54.3	24.0	3.25	39.69	5.8

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM,PA6
Roller material available: POM, PA6

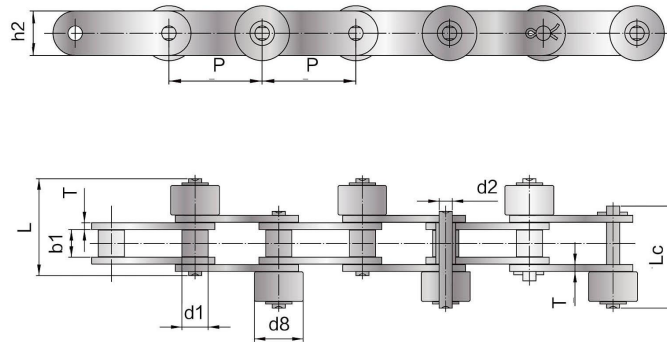

倍速链 Speed chain

GL Chain No	Pitch	Roller Dimension		Width Between Inner Plates	Pin Diameter	Pin Length		Plate Dimension		Ultimate Tensile Strength	Weight Per Meter
链号	节距	滚子尺寸		内节内宽	销轴直径	销轴长度		链板尺寸		极限拉伸载荷	每米重量
	P	d1 max	d8 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	Kg/m
SSC2040S2-PSR	25.400	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	9.66	0.99
SSC2050S	31.750	10.16	19.05	9.40	5.08	31.8	34.0	15.0	2.03	15.26	1.52
SSC2052SF1	31.750	19.05	27.00	9.40	5.08	35.0	37.3	15.0	2.03	15.26	3.06
SSC2060HS	38.100	11.91	22.23	12.57	5.94	44.0	46.6	18.0	3.25	21.70	1.78
SSC2082HSF2	50.800	28.58	40.00	15.75	7.92	54.6	57.8	24.0	4.00	38.92	6.64
SSC2100HS-P	63.500	19.05	39.69	18.90	9.53	65.3	68.6	30.0	4.80	60.69	4.44

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM,PA6
Roller material available: POM, PA6