


ASIAN STANDARD SPROCKET

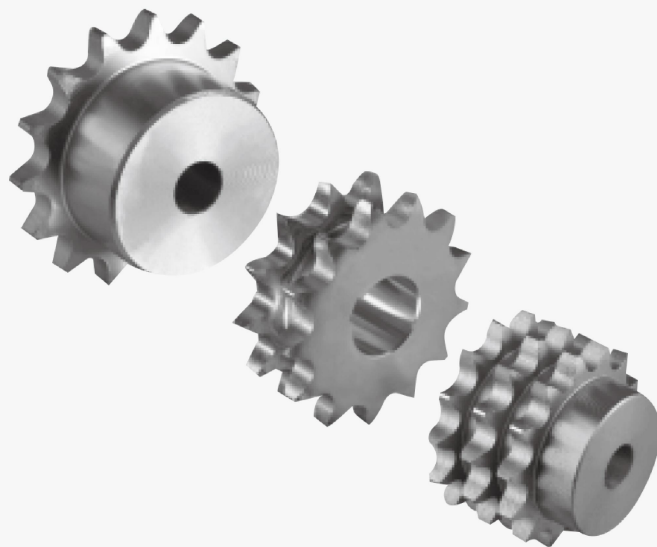



苏州股特来传动科技有限公司

Stock Bore Sprockets (NK) Asian Standard Series

NK 11SSB NK15B

NK 11SSB


SPROCKETS $\frac{\text{mm}}{\text{Tooth width (T)}}$ 1.6
CHAIN $\frac{\text{mm}}{\text{Pitch (P)}}$ 3.7465
Internal width 1.83
Roller ϕ (Dr) 2.285



Type	Teeth	From	Do	Dp	Bore d	Min	Max	BD	BL	Set screw	Wt g	Material
NK 11SSB	12		162	14.475	4	6	9.4				5.9	
	15		199	18.020	4	9	13				11.5	
	16		211	19.204	4	9	14				13.5	
	18	B-I	235	21.575	4	11	16			M3 $\times$ 0.5	17.7	
	20		259	23.949	6	13	19				23.3	
	24		307	28.703	6	13	19				25.7	SUS304
	28		355	33.462	6	13	19	10.5			28.7	Solid
	30		379	35.842						M4 $\times$ 0.7	29.7	
	34		427	40.604							37.9	
	36	B-II	451	42.966	6	13	19				40.7	
	40		498	47.751							46.5	
	48		594	57.283							60.5	

NK 15B

SPROCKETS $\frac{\text{mm}}{\text{Tooth width (T)}}$ 2.0
CHAIN $\frac{\text{mm}}{\text{Pitch (P)}}$ 4.7625
Internal width 2.38
Roller ϕ (Dr) 2.48



Type	Teeth	Do	Dp	Stock	Bore d	Min	Max	BD	BL	Wt g	Material
NK 15B	11	19.0	16.90	4	5	7	11	10	9		
	12	20.5	18.40	4	5	8	12	10	10		
	13	22.0	19.90	4	5	9	14	10	14		
	14	23.5	21.40	6	7	10	15	12	17		
	15	25.0	22.91	6	7	12	17	12	22		
	16	26.5	24.41	8	9	12	18	12	23		
	17	28.0	25.92	8	9	14	20	14	32		
	18	29.5	27.43	8	9	14	22	14	40		
	19	31.0	28.93	8	9	15	23	14	44		
	20	32.5	30.44	8	9	15	24	14	49		
	21	34.0	31.95	8	9	17	26	14	57		
	22	35.5	33.46	8	9	17	27	14	62		
	23	37.5	34.98	8	9	17	28	14	68		
	24	39.0	36.49	8	9	20	30	16	88		
	25	40.5	38.00	8	9	20	32	16	100		
	26	42.0	39.51	10	11	22	33	16	104		
	27	43.5	41.02	10	11	25	35	16	117		
	28	45.0	42.54	10	11	25	37	16	131		
	29	46.5	44.05	10	11	25	38	16	139		
	30	48.0	45.56	10	11	25	39	16	147		
	31	49.5	47.08	10	11	25	40	18	175		
	32	51.0	48.59	10	11	25	40	18	176		
	33	52.5	50.10	10	11	25	40	18	178		
	34	54.0	51.62	10	11	25	40	18	180		
	35	55.5	53.13	10	11	25	40	18	182		

B Type



www.goodlucktransmission.com

Stock Bore Sprockets (NK) Asian Standard Series


NK 25B

Type	Teeth	Do	Dp	Bore d			BD	BL	Wt g	Material
				Stock	Min	Max				
NK 25B	10	23	20.55	6.5	8.5	8.5	14	15	30	C45 Solid
	11	25	22.54	6.5	8.5	8.5	15	15	30	
	12	28	24.53	7.5	9.5	9.5	15	15	30	
	13	30	26.53	7.5	9.5	10	18	15	50	
	14	32	28.54	7.5	9.5	10	20	15	50	
	15	34	30.54	7.5	9.5	10	20	15	50	
	16	36	32.55	9.5	11.5	12	25	15	60	
	17	38	34.56	9.5	11.5	12	25	15	70	
	18	40	36.57	9.5	11.5	12	25	15	70	
	19	42	38.58	9.5	11.5	16	28	15	80	
	20	44	40.59	9.5	11.5	16	28	15	80	
	21	46	42.61	9.5	11.5	16	28	15	90	
	22	48	44.65	9.5	11.5	16	30	15	100	
	23	50	46.63	9.5	11.5	16	30	15	110	
	24	52	48.65	9.5	11.5	16	30	15	120	
	25	54	50.66	9.5	11.5	20	35	15	140	
	26	56	52.68	9.5	11.5	20	35	15	140	
	27	58	54.70	9.5	11.5	20	35	15	150	
	28	60	56.71	9.5	11.5	20	35	15	150	
	29	62	58.73	9.5	11.5	20	35	15	160	
	30	64	60.75	9.5	11.5	20	35	15	160	
	31	66	62.77	10.5	12.5	22	40	20	200	
	32	68	64.78	10.5	12.5	22	40	20	200	
	33	70	66.80	10.5	12.5	22	40	20	210	
	34	72	68.82	10.5	12.5	22	40	20	210	
	35	74	70.84	10.5	12.5	22	40	20	210	
	36	76	72.86	10.5	12.5	22	40	20	220	
	37	78	74.88	10.5	12.5	22	40	20	260	
	38	80	76.90	10.5	12.5	22	40	20	260	
	39	82	78.91	10.5	12.5	22	40	20	270	
	40	84	80.93	10.5	12.5	22	40	20	270	
	41	87	82.95	10.5	12.5	30	50	20	320	
	42	89	84.97	10.5	12.5	30	50	20	320	
	43	91	86.99	10.5	12.5	30	50	20	400	
	44	93	89.01	10.5	12.5	30	50	20	410	
	45	95	91.03	10.5	12.5	30	50	20	410	
	48	101	97.09	10.5	12.5	30	50	20	430	
	50	105	101.13	10.5	12.5	30	50	20	460	
	54	113	109.21	10.5	12.5	30	50	20	470	
	60	125	121.33	10.5	12.5	30	50	20	510	
	65	135	131.43	11.5	13.5	30	50	20	720	
	70	145	141.54	11.5	13.5	30	50	20	770	
	75	155	151.64	11.5	13.5	30	50	20	820	
	80	165	161.74	11.5	13.5	30	50	20	880	

NK 25B

SPROCKETS
Tooth width (T) mm
2.8

CHAIN
Pitch (P) mm
6.35
Internal width
3.18
Roller Φ (Dr)
3.3



Stock Bore Sprockets (NK) Asian Standard Series


NK 35B

NK 35B


SPROCKETS
Tooth width (T) mm
4.3

CHAIN
Pitch (P) mm
9.525
Internal width
4.78
Roller Φ (Dr)
5.08

Type	Teeth	Do	Dp	Bore d			BD	BL	Wt kg	Material
				Stock	Min	Max				
NK 35B	9	32	27.85	8.5	10.5	11	★21.5	20	0.06	C45 Solid Hardened Teeth
	10	34	30.82	8.5	10.5	12	★24.5	20	0.08	
	11	38	33.81	9.5	11.5	14	★27	20	0.09	
	12	41	36.81	9.5	11.5	16	★30.5	20	0.12	
	13	44	39.80	9.5	11.5	18	★32	20	0.12	
	14	47	42.81	9.5	11.5	18	32	20	0.12	
	15	51	45.81	9.5	11.5	20	35	20	0.16	
	16	54	48.82	9.5	11.5	20	37	20	0.19	
	17	57	51.84	11.5	13.5	25	41	20	0.22	
	18	60	54.85	11.5	13.5	25	44	20	0.25	
	19	63	57.87	11.5	13.5	28	47	20	0.28	
	20	66	60.89	11.5	13.5	30	50	20	0.32	
	21	69	63.91	11.5	13.5	32	53	20	0.36	
	22	72	66.92	11.5	13.5	35	56	20	0.37	
	23	75	69.95	11.5	13.5	38	60	20	0.38	
	24	78	72.97	11.5	13.5	32	53	22	0.43	
	25	81	76.00	11.5	13.5	32	53	22	0.44	
	26	84	79.02	11.5	13.5	32	53	22	0.45	
	27	87	82.05	11.5	13.5	32	53	22	0.46	
	28	90	85.07	11.5	13.5	32	53	22	0.48	
	29	93	88.10	11.5	13.5	32	53	22	0.49	
	30	96	91.12	11.5	13.5	32	53	22	0.51	
	31	99	94.15	11.5	13.5	32	53	22	0.53	
	32	102	97.18	11.5	13.5	32	53	22	0.54	
	33	105	100.20	11.5	13.5	32	53	22	0.56	
	34	109	103.23	11.5	13.5	32	53	22	0.57	
	35	112	106.26	11.5	13.5	32	53	22	0.59	
	36	115	109.29	12.5	14.5	32	53	22	0.61	
	37	118	112.31	12.5	14.5	42	63	25	0.88	
	38	121	115.34	12.5	14.5	42	63	25	0.82	
	39	124	118.37	12.5	14.5	42	63	25	0.84	
	40	127	121.40	12.5	14.5	42	63	25	0.85	
	41	130	124.43	16	18	42	63	25	0.91	
	42	133	127.46	16	18	42	63	25	0.93	
	43	136	130.49	16	18	42	63	25	0.95	
	44	139	133.52	16	18	42	63	25	0.97	
	45	142	136.55	16	18	42	63	25	1.00	
	46	145	139.58	16	18	42	63	25	1.01	
	47	148	142.61	16	18	42	63	25	1.03	
	48	151	145.64	16	18	42	63	25	1.05	
	50	157	151.70	16	18	42	63	25	1.07	Fc360 Welding
	53	166	160.78	16	18	42	63	25	1.09	
	54	169	163.81	16	18	42	63	25	1.10	
	55	172	166.85	16	18	42	63	25	1.25	
	60	187	182.00	16	18	42	63	25	1.30	
	64	200	194.12	16	18	42	63	25	1.46	
	65	203	197.15	16	18	45	68	25	1.67	
	70	218	212.30	16	18	45	68	25	1.80	
	75	233	227.46	16	18	45	68	25	1.90	
	80	248	242.61	16	18	45	68	25	2.40	



B Type Solid



B Type Weld

Teeth	S	GD
9		17
10		20
11	4.4	23
12		26
13		29

★ Has recessed groove in hub for chain clearance



Stock Bore Sprockets (NK) Asian Standard Series

NK410B


NK 410B

SPROCKETS
Tooth width (T) mm 2.8

CHAIN
Pitch (P) mm 12.70
Internal width 3.49
Roller Ø (Dr) 7.75



Type	Teeth	Do	Dp	Bore d			BD	BL	Wt kg	Material
				Stock	Min	Max				
NK 410B	10	46	41.10	9.5	11.5	16	28	20	0.14	C45 Solid
	11	51	45.08	10.5	12.5	16	30	20	0.19	
	12	55	49.07	11.5	13.5	18	34	20	0.22	
	13	59	53.07	13.5	15.5	20	38	20	0.23	
	14	63	57.07	13.5	15.5	25	42	20	0.28	
	15	67	61.08	13.5	15.5	28	46	20	0.34	
	16	71	65.10	13.5	15.5	30	50	20	0.40	
	17	76	69.12	13.5	15.5	32	54	22	0.46	
	18	80	73.14	13.5	15.5	35	57	22	0.51	
	19	84	77.16	13.5	15.5	40	62	22	0.59	
	20	88	81.18	14	16	45	67	25	0.76	
	21	92	85.21	14	16	48	71	25	0.85	
	22	96	89.24	14	16	51	75	25	0.95	
	23	100	93.27	14	16	51	77	25	1.00	
	24	104	97.30	14	16	42	63	25	0.84	
	25	108	101.33	14	16	42	63	25	0.88	
	26	112	105.36	14	16	42	63	25	0.92	
	27	116	109.40	14	16	42	63	25	0.96	
	28	120	113.43	14	16	42	63	25	1.00	
	29	124	117.46	14	16	42	63	25	1.00	
	30	128	121.50	14	16	42	63	25	1.10	
	31	133	125.53	14	16	45	68	28	1.20	
	32	137	129.57	14	16	45	68	28	1.30	
	33	141	133.61	14	16	45	68	28	1.30	
	34	145	137.64	14	16	45	68	28	1.30	
	35	149	141.68	14	16	45	68	28	1.40	
	36	153	145.72	16	18	45	68	28	1.50	
	37	157	149.75	16	18	45	68	28	1.55	
	38	161	153.79	16	18	45	68	28	1.60	
	39	165	157.83	16	18	45	68	28	1.65	
	40	169	161.87	16	18	45	68	28	1.70	
	41	173	165.91	16	18	48	73	32	2.00	
	42	177	169.95	16	18	48	73	32	2.05	
	43	181	173.98	16	18	48	73	32	2.10	
	44	185	178.02	16	18	48	73	32	2.17	
	45	189	182.06	16	18	48	73	32	2.25	
	46	193	186.10	16	18	48	73	32	2.30	
	47	197	190.14	16	18	48	73	32	2.37	
	48	201	194.18	16	18	48	73	32	2.45	
	49	205	198.22	16	18	48	73	32	2.51	
	50	209	202.26	16	18	48	73	32	2.60	
	51	214	206.30	16	18	48	73	32	2.65	
	52	218	210.34	16	18	48	73	32	2.72	
	53	222	214.38	16	18	48	73	32	2.80	
	54	226	218.42	16	18	48	73	32	2.90	
	55	230	222.46	16	18	48	73	32	2.96	
	56	234	226.50	16	18	48	73	32	3.04	
	60	250	242.66	16	18	48	73	32	3.40	
	64	266	258.83	16	18	48	73	32	3.73	
	65	270	262.87	16	18	55	83	32	4.10	
	68	282	274.99	16	18	55	83	32	4.35	
	70	290	283.07	16	18	55	83	32	4.57	
	72	299	291.16	20	22	55	83	32	4.80	
	75	311	303.28	20	22	55	83	32	5.10	
	80	331	323.49	20	22	60	88	35	5.90	
	85	351	343.69	20	22	60	88	35	6.50	
	90	371	363.90	20	22	60	88	35	7.15	



Stock Bore Sprockets (NK) Asian Standard Series


NK 40B

Type	Teeth	Do	Dp	Bore d			BD	BL	Wt kg	Material
				Stock	Min	Max				
NK 40B	9	42	37.13	8.5	10.5	16	★20	22	0.11	C45 Solid Hardened Teeth
	10	46	41.10	9.5	11.5	18	★32	22	0.14	
	11	51	45.08	10.5	12.5	20	★36	22	0.19	
	12	55	49.07	11.5	13.5	22	★40	22	0.22	
	13	59	53.07	13.5	15.5	20	37	22	0.23	
	14	63	57.07	13.5	15.5	25	42	22	0.28	
	15	67	61.08	13.5	15.5	28	46	22	0.34	
	16	71	65.10	13.5	15.5	30	50	22	0.40	
	17	76	69.12	13.5	15.5	32	54	22	0.46	
	18	80	73.14	13.5	15.5	35	57	22	0.51	
	19	84	77.16	13.5	15.5	40	62	22	0.59	
	20	88	81.18	14	16	45	67	25	0.76	
	21	92	85.21	14	16	48	71	25	0.85	
	22	96	89.24	14	16	51	75	25	0.95	
	23	100	93.27	14	16	51	77	25	1.00	
	24	104	97.30	14	16	42	63	25	0.84	
	25	108	101.33	14	16	42	63	25	0.88	
	26	112	105.36	13	16	42	63	25	0.92	
	27	116	109.40	13	16	42	63	25	0.96	
	28	120	113.43	13	16	42	63	25	1.00	
	29	124	117.46	13	16	42	63	25	1.00	
	30	128	121.50	13	16	42	63	25	1.10	
	31	133	125.53	14	16	45	68	28	1.20	
	32	137	129.57	14	16	45	68	28	1.30	
	33	141	133.61	14	16	45	68	28	1.30	
	34	145	137.64	14	16	45	68	28	1.30	
	35	149	141.68	14	16	45	68	28	1.40	
	36	153	145.72	16	18	45	68	28	1.50	
	37	157	149.75	16	18	45	68	28	1.55	
	38	161	153.79	16	18	45	68	28	1.60	
	39	165	157.83	16	18	45	68	28	1.65	
	40	169	161.87	16	18	45	68	28	1.70	
	41	173	165.91	16	18	48	73	32	2.00	
	42	177	169.95	16	18	48	73	32	2.05	
	43	181	173.98	16	18	48	73	32	2.10	
	44	185	178.02	16	18	48	73	32	2.17	
	45	189	182.06	16	18	48	73	32	2.25	
	46	193	186.10	16	18	48	73	32	2.30	
	47	197	190.14	16	18	48	73	32	2.37	
	48	201	194.18	16	18	48	73	32	2.45	
	49	205	198.22	16	18	48	73	32	2.51	
	50	209	202.26	16	18	48	73	32	2.60	
	51	214	206.30	16	18	48	73	32	2.65	
	52	218	210.34	16	18	48	73	32	2.72	
	53	222	214.38	16	18	48	73	32	2.80	
	54	226	218.42	16	18	48	73	32	2.90	
	55	230	222.46	16	18	48	73	32	2.96	
	56	234	226.50	16	18	48	73	32	3.04	
	60	250	242.66	16	18	48	73	32	3.40	
	64	266	258.83	16	18	48	73	32	3.73	
	65	270	262.87	16	18	55	83	32	4.10	
	68	282	274.99	16	18	55	83	32	4.35	
	70	290	283.07	16	18	55	83	32	4.57	
	72	299	291.16	20	22	55	83	32	4.80	
	75	311	303.28	20	22	55	83	32	5.10	
	80	331	323.49	20	22	60	88	35	5.90	
	85	351	343.69	20	22	60	88	35	6.50	
	90	371	363.90	20	22	60	88	35	7.15	


NK 40B

SPROCKETS
Tooth width (T) mm 7.2

CHAIN
Pitch (P) mm 12.7
Internal width 7.95
Roller Ø (Dr) 7.95



B Type Solid



B Type Weld

Teeth	S	GD
9		23
10		27
11	5.2	31
12		35

★Has recessed groove in hub for chain clearance



www.goodlucktransmission.com

Stock Bore Sprockets (NK) Asian Standard Series


NK 50B

Type	Teeth	Do	Dp	Bore d	Stock	Min	Max	BD	BL	Wt	Material
NK 50B	8	48	41.48	11.5	13.5	13.5	★22	25	0.12		
	9	53	46.42	11.5	13.5	18	★34	25	0.20		
	10	58	51.37	14.5	16.5	22	★40	25	0.27		
	11	64	56.35	14.5	16.5	28	★45.5	25	0.33		
	12	69	61.34	14.5	16.5	30	★50	25	0.44		
	13	74	66.34	14.5	16.5	32	★51	25	0.66		
	14	79	71.34	14.5	16.5	32	52	25	0.52		
	15	84	76.35	14.5	16.5	35	57	25	0.62		
	16	89	81.37	14	16	40	62	25	0.72		
	17	94	86.39	14	16	45	67	25	0.83		
	18	100	91.42	14	16	48	72	28	1.06		
	19	105	96.45	14	16	48	73	28	1.10		
	20	110	101.48	14	16	48	73	28	1.20		
	21	115	106.51	14	16	48	73	28	1.20		
	22	120	111.55	16	18	48	73	28	1.30		
	23	125	116.58	16	18	48	73	28	1.30		
	24	130	121.62	16	18	48	73	28	1.40		
	25	135	126.66	16	18	48	73	28	1.50		
	26	140	131.70	16	18	48	73	28	1.50		
	27	145	136.74	16	18	48	73	28	1.50		
	28	150	141.79	16	18	48	73	28	1.60		
	29	155	146.83	16	18	48	73	28	1.70		
	30	161	151.87	16	18	48	73	28	1.80		
	31	166	156.92	16	18	48	73	28	1.85		
	32	171	161.96	16	18	48	73	28	1.90		
	33	176	167.01	16	18	48	73	28	2.00		
	34	181	172.05	16	18	48	73	28	2.10		
	35	186	177.10	16	18	48	73	28	2.20		
	36	191	182.14	16	18	55	83	35	2.85		
	37	196	187.19	16	18	55	83	35	2.95		
	38	201	192.24	16	18	55	83	35	3.05		
	39	206	197.29	16	18	55	83	35	3.15		
	40	211	202.33	16	18	55	83	35	3.25		
	41	216	207.38	16	18	55	83	35	3.40		
	42	221	212.43	16	18	55	83	35	3.50		
	43	226	217.48	16	18	55	83	35	3.60		
	44	231	222.53	16	18	55	83	35	3.70		
	45	237	227.58	16	18	55	83	35	3.85		
	46	242	232.63	16	18	55	83	35	3.96		
	47	247	237.68	16	18	55	83	35	4.09		
	48	252	242.73	16	18	55	83	35	4.20		
	49	257	247.78	16	18	55	83	35	4.35		
	50	262	252.83	16	18	55	83	35	4.50		
	51	267	257.88	16	18	55	83	35	4.62		
	52	272	262.92	16	18	55	83	35	4.76		
	53	277	267.97	16	18	55	83	35	4.91		
	54	282	273.02	16	18	55	83	35	5.05		
	55	287	278.08	16	18	55	83	35	5.20		
	56	292	283.13	16	18	55	83	35	5.36		
	57	297	288.18	16	18	55	83	35	5.51		
	58	302	193.23	16	18	55	83	35	5.67		
	60	312	303.33	16	18	55	83	35	6.00		
	65	338	328.38	20	22	63	93	40	7.40		
	68	353	343.74	20	22	63	93	40	7.94		
	70	363	353.84	20	22	63	93	40	8.30		
	75	388	379.10	20	22	63	93	40	9.35		
	80	414	404.36	20	22	63	93	40	10.50		
	85	439	424.62	20	22	63	93	40	12.00		
	90	464	454.88	20	22	63	93	40	13.20		


★ Has recessed groove in hub for chain clearance

NK 50B

SPROCKETS mm
Tooth width (T) 8.7
CHAIN mm
Pitch (P) 15.875
Internal width 9.53
Roller Ø (Dr) 10.16



B Type Solid



B Type Weld

Teeth	S	GD
8		22
9		29
10	64	34
11		39
12		44
13		49

Stock Bore Sprockets (NK) Asian Standard Series


NK 60B

Type	Teeth	Do	Dp	Bore d	Stock	Min	Max	BD	BL	Wt	Material
NK 60B	9	63	55.70	11.5	13.5	25	★43	32	0.40		
	10	68	61.65	14.5	16.5	30	★49	32	0.49		
	11	76	67.62	14.5	16.5	32	★51	32	0.60		
	12	83	73.60	14.5	16.5	32	51	32	0.69		
	13	89	79.60	14	16	35	57	32	0.71		
	14	95	85.61	16	18	40	62	32	0.96		
	15	101	91.62	16	18	45	68	32	1.10		
	16	107	97.65	16	18	48	73	32	1.30		
	17	113	103.67	16	18	48	73	32	1.40		
	18	119	109.71	16	18	55	83	40	2.00		
	19	125	115.74	16	18	55	83	40	2.10		
	20	132	121.79	16	18	55	83	40	2.20		
	21	138	127.82	16	18	55	83	40	2.30		
	22	144	133.86	16	18	55	83	40	2.50		
	23	150	139.90	16	18	55	83	40	2.50		
	24	156	145.95	16	18	55	83	40	2.60		
	25	162	151.99	16	18	55	83	40	2.70		
	26	168	158.04	16	18	55	83	40	2.90		
	27	174	164.09	20	22	55	83	40	3.00		
	28	180	170.14	20	22	55	83	40	3.10		
	29	187	176.20	20	22	55	83	40	3.30		
	30	193	182.25	20	22	55	83	40	3.40		
	31	199	188.30	20	22	55	83	40	3.64		
	32	205	194.35	20	22	55	83	40	3.80		
	33	211	200.41	20	22	55	83	40	4.00		
	34	217	206.46	20	22	55	83	40	4.15		
	35	223	212.52	20	22	55	83	40	4.33		
	36	229	218.57	20	22	55	83	40	4.52		
	37	235	224.63	20	22	55	83	40	4.70		
	38	241	230.69	20	22	55	83	40	4.90		
	39	247	236.74	20	22	55	83	40	5.10		
	40	253	242.80	20	22	55	83	40	5.30		
	41	260	248.86	20	22	63	93	45	6.00		
	42	266	254.92	20	22	63	93	45	6.40		
	43	272	260.98	20	22	63	93	45	6.60		
	44	278	267.03	20	22	63	93	45	6.88		
	45	284	273.09	20	22	63	93	45	7.10		
	46	290	279.15	20	22	63	93	45	7.28		
	47	296	285.21	20	22	63	93	45	7.53		
	48	302	291.27	20	22	63	93	45	7.85		
	49	308	297.33	20	22	63	93	45	8.04		
	50	314	303.39	20	22	63	93	45	8.40		
	51	320	309.45	20	22	63	93	45	8.57		
	52	326	315.51	20	22	63	93	45	8.84		
	54	338	327.63	20	22	63	93	45	9.50		
	55	345	333.69	20	22	63	93	45	9.69		
	56	351	339.75	20	22	63	93	45	9.99		
	58	363	351.87	20	22	63	93	45	10.59		
	60	375	363.99	20	22	63	93	45	11.20		
	64	399	388.24	20	22	63	93	45	12.50		
	65	405	394.30	26	28	75	107	45	13.50		
	70	436	424.61	26	28	75	107	45	15.30		
	75	466	454.92	26	28	75	107	45	17.20		
	80	496	485.23	26	28	80	117	50	20.00		
	85	527	515.54	26	28	80	117	50	22.30		
	90	557	545.85	26	28	80	117	50	24.60		


★ Has recessed groove in hub for chain clearance

NK 60B

SPROCKETS mm
Tooth width (T) 11.7
CHAIN mm
Pitch (P) 19.05
Internal width 12.70
Roller Ø (Dr) 11.91



B Type Solid



B Type Weld

Teeth	S	GD
9		32
10	8.0	37
11		45



Stock Bore Sprockets (NK) Asian Standard Series

NK 80B


Type	Teeth	Do	Dp	Bore d			BD	BL	Wt Kg	Material
				Stock	Min	Max				
NK 80B	9	85	74.27	16	18	35	★58	40	0.07	C45 Solid Hardened Teeth
	10	93	82.19	16	18	32	52	40	1.02	
	11	102	90.16	16	18	38	60	40	1.25	
	12	110	98.14	16	18	45	67	40	1.60	
	13	118	106.14	16	18	51	77	40	1.90	
	14	127	114.15	16	18	51	77	40	2.15	
	15	135	122.17	20	22	63	93	40	2.30	
	16	143	130.20	20	22	63	93	40	2.50	
	17	151	138.23	20	22	63	93	40	2.95	
	18	159	146.27	20	22	63	93	40	3.15	
	19	167	154.32	20	22	63	93	40	3.40	Fe360 Welding
	20	176	162.37	20	22	63	93	40	3.60	
	21	184	170.42	20	22	63	93	40	3.85	
	22	192	178.48	26	28	75	107	45	5.00	
	23	200	186.54	26	28	75	107	45	5.23	
	24	208	194.60	26	28	75	107	45	5.50	
	25	216	202.66	26	28	75	107	45	5.80	
	26	224	210.72	26	28	75	107	45	6.10	
	27	233	218.79	26	28	75	107	45	6.40	
	28	241	226.86	26	28	75	107	45	6.75	
	29	249	234.93	26	28	75	107	45	7.10	Fe360 Welding
	30	257	243.00	26	28	75	107	45	7.40	
	31	265	251.07	26	28	75	107	45	7.80	
	32	273	259.14	26	28	75	107	45	8.15	
	33	281	267.21	26	28	75	107	45	8.50	
	34	289	275.29	26	28	75	107	45	8.90	
	35	297	283.36	26	28	75	107	45	9.30	
	36	306	291.43	26	28	80	117	50	10.60	
	37	314	299.51	26	28	80	117	50	11.00	
	38	322	307.58	26	28	80	117	50	11.40	
	39	330	315.66	26	28	80	117	50	11.90	Fe360 Welding
	40	338	323.74	26	28	80	117	50	12.40	
	41	346	331.81	26	28	80	117	50	12.80	
	42	354	339.89	26	28	80	117	50	13.30	
	43	362	347.97	26	28	80	117	50	13.80	
	44	370	356.04	26	28	80	117	50	14.30	
	45	378	364.12	26	28	80	117	50	14.90	
	46	387	372.20	26	28	80	117	50	15.30	
	47	395	380.28	26	28	80	117	50	15.70	
	48	403	388.36	26	28	80	117	50	15.80	
	50	419	404.52	26	28	80	117	50	17.65	Fe360 Welding
	52	435	420.68	26	28	80	117	50	18.70	
	53	443	428.76	26	28	80	117	50	19.30	
	54	451	436.84	26	28	80	117	50	20.00	
	55	459	444.92	26	28	80	117	50	20.60	
	56	468	453.00	26	28	80	117	50	21.30	
	58	484	469.16	26	28	80	117	50	22.55	
	60	500	485.33	26	28	80	117	50	23.10	
	65	540	525.73	26	28	89	127	63	29.40	
	70	581	566.15	26	28	89	127	63	32.10	Fe360 Welding
	75	621	606.56	26	28	89	127	63	36.20	
	80	662	646.97	26	28	95	127	71	42.90	
	90	743	727.80	26	28	95	127	71	53.00	

Teeth	S	GD
9	10.4	44


★ Has recessed groove in hub for chain clearance

NK 80B


SPROCKETS	mm
Tooth width (T)	14.6
CHAIN	mm
Pitch (P)	25.4
Internal width	15.88
Roller Φ (Dr)	15.88



B Type Solid



B Type Weld



C Type Weld

Stock Bore Sprockets (NK) Asian Standard Series

NK 100B NK 100C


NK 100B / NK 100C

SPROCKETS	mm
Tooth width (T)	17.6
CHAIN	mm
Pitch (P)	31.75
Internal width	19.05
Roller Φ (Dr)	19.05


Type	Teeth	Do	Dp	Bore d			BD	BL	Wt Kg	Material
				Stock	Min	Max				
NK 100B	9	106	92.84	20	22	40	★70	50	1.6	C45 Solid Hardened Teeth
	10	117	102.74	20	22	45	65	50	1.9	
	11	127	112.70	20	22	51	75	50	2.3	
	12	138	122.67	20	22	57	86	50	2.9	
	13	148	132.67	20	22	63	94	50	3.1	
	14	158	142.68	20	22	66	98	50	3.6	
	15	168	152.71	20	22	66	98	50	4.2	
	16	179	162.74	20	22	66	98	50	4.6	
	17	189	172.79	20	22	75	107	50	5.3	
	18	199	182.84	20	22	75	107	50	5.7	Fe360 Welding
	19	209	192.90	20	22	75	107	50	6.1	
	20	220	202.96	20	22	75	107	50	6.5	
	21	230	213.03	20	22	75	107	50	7.0	
	22	240	223.10	20	22	80	117	56	7.9	
	23	250	233.17	20	22	80	117	56	8.5	
	24	260	243.25	20	22	80	117	56	8.8	
	25	270	253.32	20	22	80	117	56	9.3	
	26	281	263.40	20	22	80	117	56	9.8	
	27	291	273.49	20	22	80	117	56	10.3	
	28	301	283.57	20	22	80	117	56	10.9	Fe360 Welding
	29	311	293.66	20	22	80	117	56	11.5	
	30	321	303.75	26	28	80	117	56	12.1	
	32	341	323.92	26	28	80	117	56	14.5	
	33	352	334.01	26	28	80	117	56	16.1	
	34	362	344.11	26	28	80	117	56	16.6	
	35	372	354.20	26	28	89	127	63	17.5	
	36	382	364.29	26	28	89	127	63	18.0	
	37	392	374.38	26	28	89	127	63	18.9	
	38	402	384.48	26	28	89	127	63	19.5	
	40	422	404.67	26	28	89	127	63	20.4	Fe360 Welding
	41	433	414.77	26	28	89	127	63	21.5	
	42	443	424.86	26	28	89	127	63	22.6	
	45	473	455.16	26	28	89	127	63	24.7	
	47	493	475.35	26	28	89	127	63	26.7	
	48	503	485.45	26	28	89	127	63	27.5	
	50	524	505.65	26	28	89	127	63	30.0	
	54	564	546.05	26	28	103	147	80	37.4	
	55	574	556.15	26	28	103	147	80	41.6	
	60	625	606.66	26	28	103	147	80	44.3	Fe360 Welding
	65	675	657.17	26	28	103	147	80	54.5	
	70	726	707.68	26	28	103	147	100	64.7	
	NK 100C	75	777	758.20	26	28	103	147	100	72.7

Teeth	S	GD
9	11.5	55


★ Has recessed groove in hub for chain clearance



B Type Solid



B Type Weld



C Type Weld




Stock Bore Sprockets (NK) Asian Standard Series

NK 120B
NK 120C


NK 120B / NK 120C

SPROCKETS mm
Tooth width (T) 23.5


CHAIN mm
Pitch (P) 38.10
Internal width 25.40
Roller Φ (Dr) 22.23



B Type Solid



B Type Weld



C Type Weld

Power Transmission Professional

Type	Teeth	Do	Dp	Bore d			BD	BL	Wt kg	Material
				Stock	Min	Max				
NK 120B	10	140	123.29	20	22	51	78	56	3.20	C45 Solid Hardened Teeth
	11	153	135.24	20	22	60	91	56	4.00	
	12	165	147.21	20	22	66	98	56	4.80	
	13	177	159.20	20	22	66	98	56	5.30	
	14	190	171.22	20	22	75	107	56	6.30	
	15	202	183.25	20	22	80	117	63	7.80	
	16	214	195.29	20	22	80	117	63	8.40	
	17	227	207.35	20	22	80	117	63	9.10	
	18	239	219.41	20	22	80	117	63	9.90	
	19	251	231.40	20	22	80	117	63	10.70	
	20	263	243.55	20	22	89	127	63	12.10	
	21	276	255.63	20	22	89	127	63	13.00	
	22	288	267.72	26	28	89	127	63	13.40	Fc360 Welding
	23	300	279.80	26	28	89	127	63	14.50	
	24	312	291.90	26	28	89	127	63	15.20	
	25	324	303.99	26	28	89	127	63	16.20	
	26	337	316.09	26	28	89	127	63	17.20	
	28	361	340.29	26	28	95	137	71	20.90	
	30	385	364.50	26	28	95	137	71	23.20	
	32	410	388.71	26	28	95	137	71	25.70	
	33	422	400.82	26	28	95	137	71	28.40	
	34	434	412.93	26	28	95	137	71	29.00	
	35	446	425.04	26	28	95	137	71	29.70	
NK 120C	36	458	437.15	26	28	95	137	71	32.00	
	38	483	461.38	26	28	95	137	71	35.00	
	40	507	485.60	26	28	103	147	80	38.20	
	42	531	509.84	26	28	103	147	80	42.00	
	45	568	546.19	26	28	103	147	80	47.60	
	48	604	582.54	26	28	103	147	80	53.00	



Stock Bore Sprockets (NK) Asian Standard Series

NK 140B
NK 140C


NK 140B / NK 140C

SPROCKETS mm
Tooth width (T) 23.5


CHAIN mm
Pitch (P) 44.45
Internal width 25.22
Roller Φ (Dr) 25.40



B Type Solid



B Type Weld



C Type Weld

Stock Bore

Type	Teeth	Do	Dp	Bore d			BD	BL	Wt kg	Material
				Stock	Min	Max				
NK 140B	10	163	143.84	26	28	66	98	56	4.90	C45 Solid Hardened Teeth
	11	178	157.78	26	28	70	106	56	5.50	
	12	193	171.74	26	28	80	117	56	6.60	
	13	207	185.74	26	28	80	117	63	7.90	
	14	221	199.76	26	28	89	127	63	9.30	
	15	236	213.79	26	28	89	127	63	10.10	
	16	250	227.84	26	28	89	127	63	11.00	
	17	264	241.91	26	28	89	127	63	12.00	
	18	279	255.98	26	28	89	127	63	13.00	
	19	293	270.06	26	28	95	137	71	15.60	
	20	307	284.15	26	28	95	137	71	16.70	
	21	322	298.24	26	28	95	137	71	17.90	Fc360 Welding
	22	336	312.34	26	28	95	137	71	18.40	
	23	350	326.44	26	28	95	137	71	20.10	
	24	364	340.54	26	28	95	137	71	20.90	
	25	379	354.65	26	28	103	147	80	24.10	
	26	393	368.77	26	28	103	147	80	25.50	
	27	407	382.88	26	28	103	147	80	28.20	
	28	421	397.00	26	28	103	147	80	30.10	
	30	450	425.24	26	28	103	147	80	31.50	
	32	478	453.49	26	28	103	147	80	36.00	
	35	521	495.88	26	28	110	157	90	42.90	
NK 140C	36	535	510.01	26	28	110	157	90	47.40	
	38	563	538.27	26	28	110	157	90	51.00	
	40	591	566.54	26	28	110	157	90	53.10	
	42	620	594.81	26	28	110	157	90	60.00	
	45	662	637.22	26	28	118	167	100	68.00	
	48	705	679.63	26	28	118	167	100	75.00	
	50	733	707.91	26	28	118	167	100	85.30	
	54	790	764.47	26	28	118	167	100	97.40	
	60	875	849.32	26	28	118	167	112	119.30	




Stock Bore Sprockets (NK) Asian Standard Series

NK 160B NK 160C


NK 160B / NK 160C

SPROCKETS mm
Tooth width (T) 29.4


CHAIN mm
Pitch (P) 50.80
Internal width 31.55
Roller Φ (Dr) 28.58



B Type Solid



B Type Weld




C Type Weld

Stock Bore


Type	Teeth	Do	Dp	Stock	Bore d	BD	BL	Wt	Material
				Min	Max			kg	
NK 160B	10	186	164.39	26	28	70	105	63	6.80
	11	204	180.31	26	28	80	117	63	8.30
	12	220	196.28	26	28	89	127	63	9.90
	13	237	212.27	26	28	95	137	71	12.50
	14	253	228.30	26	28	95	137	71	13.80
	15	269	244.33	26	28	95	137	71	15.20
	16	286	260.39	26	28	103	147	71	17.40
	17	302	276.46	26	28	103	147	71	18.90
	18	319	292.55	26	28	103	147	71	20.60
	19	335	308.64	26	28	103	147	71	22.30
	20	351	324.74	26	28	103	147	71	24.20
	21	368	340.84	26	28	103	147	71	26.10
	22	384	356.96	26	28	118	167	80	30.20
	24	416	389.19	26	28	118	167	80	34.40
	25	433	405.32	26	28	118	167	80	36.60
	26	449	421.45	26	28	118	167	80	38.90
	30	514	485.99	26	28	118	167	100	52.80
	32	546	518.28	26	28	118	167	100	59.00
	35	595	566.71	26	28	118	167	100	66.90
	40	676	647.47	26	28	118	187	112	88.00
NK 160C	45	757	728.25	26	28	132	187	125	115.00
	48	806	776.72	26	28	132	187	125	128.00
	50	838	809.04	26	28	132	187	125	138.70
	54	903	873.68	26	28	132	187	125	158.40
	60	1000	970.65	26	28	132	187	125	190.80

Stock Bore Sprockets (NK) Asian Standard Series

NK 180B NK 180C

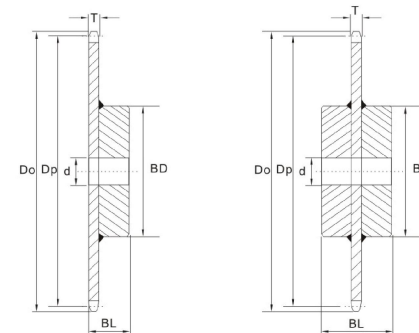

B Type Weld



C Type Weld

Power Transmission Professional

Type	Teeth	Do	Dp	Stock	Bore d	BD	BL	Wt	Material
					Min	Max		kg	
NK 180B	11	229	202.85	43	45	75	110	55	9.3
	12	240	220.81	43	45	85	130	65	12.6
	13	266	238.81	43	45	95	150	75	16.6
	14	285	256.83	43	45	105	170	80	20.9
	15	303	274.87	43	45	110	180	80	23.8
	16	322	292.94	43	45	110	180	80	25.9
	17	340	311.01	43	45	115	180	80	28.1
	18	358	329.11	43	45	115	180	80	29.9
	19	377	347.21	43	45	115	180	80	32.4
	20	395	365.33	43	45	115	180	80	35.0
NK 180C	21	413	383.45	63	65	120	190	85	38.8
	22	432	401.57	63	65	120	190	85	41.7
	24	468	437.84	63	65	125	200	90	50.2
	25	487	455.99	63	65	125	200	90	53.5
	26	505	474.13	63	65	125	200	90	56.8
	30	578	546.74	63	65	135	220	110	81.1
	35	669	637.56	63	65	135	220	110	102.9
	40	760	728.41	63	65	150	240	125	137.5
	45	852	819.28	63	65	150	240	125	166.1
	48	903	873.81	63	65	150	240	125	184.9
	60	1,125	1,091.98	63	65	150	240	125	272.2

NK 180B / NK 180C

SPROCKETS mm
Tooth width (T) 33.0


CHAIN mm
Pitch (P) 57.15
Internal width 35.72
Roller Φ (Dr) 35.71

Fe360
Welding



Stock Bore Sprockets (NK) Asian Standard Series

NK 200B
NK 200C

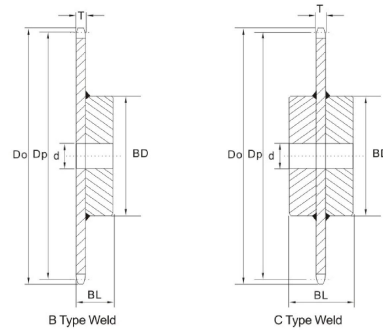

Power Transmission Professional

Type	Teeth	Do	Dp	Stock	Bore d	Min	Max	BD	BL	Wt g	Material
NK 200B	11	254	225.39	43	45	80	130	65	13.4		
	12	275	245.34	43	45	90	150	75	17.8		
	13	296	265.34	43	45	100	170	80	22.4		
	14	316	285.37	43	45	110	180	80	25.7		
	15	337	305.42	43	45	115	180	80	28.3		
	16	357	325.49	43	45	115	180	80	30.3		
	17	378	345.58	43	45	120	190	85	35.3		
	18	398	365.68	43	45	120	190	85	38.4		
NK 200C	19	419	385.79	63	65	125	200	90	42.9		
	20	439	405.92	63	65	125	200	90	46.4		
	21	459	426.05	63	65	135	220	110	59.1		
	22	480	446.20	63	65	135	220	110	62.2		
	24	520	486.49	63	65	140	230	110	73.1		
	25	541	506.65	63	65	140	230	110	77.5		
	26	561	526.81	63	65	140	230	110	82.0		
	30	642	607.49	63	65	150	240	125	109.1		
	35	744	708.39	63	65	150	240	125	138.0		
	40	845	809.34	63	65	170	270	140	186.1		
	45	946	910.31	63	65	170	270	140	223.9		
	48	1,007	970.90	68	70	170	270	140	248.2		
	60	1,250	1,213.31	68	70	170	270	140	363.2		

NK 200B / NK 200C


SPROCKETS	mm
Teeth width (T)	35.3
CHAIN	mm
Pitch (P)	63.50
Internal width	37.85
Roller Ø (Dr)	39.68

Fe360
Welding



Stock Bore Sprockets (NK) Asian Standard Series

NK 35-2B

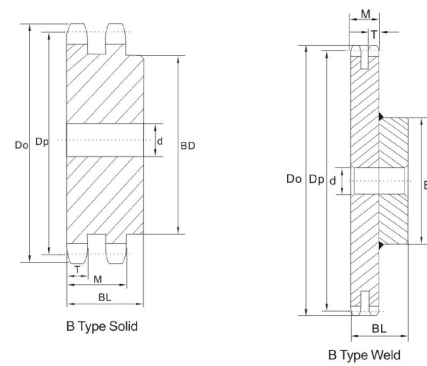

Type	Teeth	Do	Dp	Stock	Bore d	Min	Max	BD	BL	Wt kg	Material
NK 35-2B	10	34	30.82	9	11	10	20	30	0.10		
	11	38	33.81	10	12	12	23	30	0.11		
	12	41	36.80	10	12	14	26	30	0.14		
	13	44	39.80	10	12	14	27	30	0.17		
	14	47	42.81	10	12	18	32	30	0.21		
	15	51	45.81	10	12	20	35	30	0.25		
	16	54	48.82	10	12	20	38	30	0.29		
	17	57	51.84	11.5	13.5	22	41	30	0.34		
	18	60	54.85	11.5	13.5	25	44	35	0.45		
	19	63	57.87	11.5	13.5	28	47	35	0.51		
	20	66	60.89	12	14	30	50	40	0.64		
	21	69	63.91	12	14	30	50	40	0.64		
	22	72	66.93	12	14	32	55	40	0.67		
	24	78	72.97	15	17	38	60	40	0.82		
	25	81	76.00	15	17	38	60	40	0.92		
	28	90	85.07	15	17	42	65	45	1.26		
	30	96	91.12	15	17	42	65	45	1.34		
	32	102	97.18	15	17	42	65	45	1.43		
	40	127	121.40	15	17	42	65	45	2.30		
	45	142	136.55	19	21	55	83	45	2.94		
	50	157	151.70	19	21	55	83	45	3.22		
	60	187	182.00	19	21	63	93	50	4.70		

Stock Bore

NK 35-2B

SPROCKETS	mm
Teeth width (T)	4.1
CHAIN	mm
Pitch (P)	9.525
Internal width	4.78
Roller Ø (Dr)	5.08

C45 Solid
Hardened
Teeth

Fe360
Welding




Stock Bore Sprockets (NK) Asian Standard Series

NK 40-2B


NK 40-2B

SPROCKETS	mm
Teeth width (T)	7.0
CHAIN	mm
Pitch (P)	12.7
Internal width	7.95
Roller Φ (Dr)	7.95



B Type Solid

Type	Teeth	Do	Dp	Stock	Bore d	Min	Max	BD	BL	Wt kg	Material
NK40-2B	10	46	41.10	13	16	20	35	0.28			C45 Solid Hardened Teeth
	11	51	45.08	13	16	30	35	0.30			
	12	55	49.07	14	16	20	35	0.34			
	13	59	53.07	14	16	22	39	0.40			
	14	63	57.07	14	16	25	43	0.47			
	15	67	61.08	14	16	28	47	0.55			
	16	71	65.10	14	16	30	50	0.65			
	17	76	69.12	14	16	32	54	0.75			
	18	80	73.14	14	16	38	59	0.85			
	19	84	77.16	14	16	42	63	0.98			
	20	88	81.18	14	16	45	67	1.30			
	21	92	85.21	14	16	45	68	1.30			
	22	96	89.24	14	16	48	72	1.50			
	23	100	93.27	14	16	51	76	1.60			
	24	104	97.30	14	16	55	80	1.80			
	25	108	101.33	18	20	57	84	2.00			C45 Solid
	26	112	105.36	18	20	60	88	2.20			
	27	116	109.40	18	20	60	92	2.30			
	28	120	113.43	18	20	66	96	2.50			
	29	124	117.46	18	20	66	96	2.65			
	30	128	121.50	18	20	66	100	2.80			
	31	133	125.53	23	25	66	100	2.95			
	32	137	129.57	23	25	66	100	3.05			
	33	141	133.61	23	25	66	100	3.06			
	34	145	137.64	23	25	66	100	3.08			
	35	149	141.68	23	25	66	100	3.10			
	36	153	145.72	23	25	66	100	3.30			
	37	157	149.75	23	25	66	100	3.40			
	38	161	153.79	23	25	66	100	3.50			
	40	169	161.87	23	25	66	100	3.60			Fc360 Welding
	42	177	169.95	23	25	63	93	5.00			
	45	189	182.06	23	25	63	93	5.00			
	48	201	194.18	23	25	63	93	5.00			
	50	209	202.26	23	25	63	93	5.50			
	54	226	218.42	23	25	63	93	5.80			
	60	250	242.66	23	25	63	93	6.70			
	65	270	262.87	23	25	63	93	10.20			
	70	290	283.07	23	25	63	93	11.50			



B Type Weld




Stock Bore Sprockets (NK) Asian Standard Series

NK 50-2B

NK 50-2B


SPROCKETS	mm
Teeth width (T)	8.4
CHAIN	mm
Pitch (P)	15.875
Internal width	9.53
Roller Φ (Dr)	10.16



B Type Solid

Stock Bore

Type	Teeth	Do	Dp	Stock	Bore d	Min	Max	BD	BL	Wt kg	Material
NK50-2B	10	58	51.37	14	16	20	35	40	0.50		C45 Solid Hardened Teeth
	11	64	56.35	14	16	22	40	40	0.50		
	12	69	61.34	14	16	25	42	40	0.62		
	13	74	66.34	14	16	30	49	40	0.75		
	14	79	71.34	14	16	32	54	40	0.90		
	15	84	76.35	14	16	38	59	40	1.10		
	16	89	81.37	14	16	42	64	45	1.40		
	17	94	86.39	14	16	45	68	45	1.60		
	18	100	91.42	14	16	48	74	45	1.80		
	19	105	96.45	14	16	55	79	45	2.10		
	20	110	101.48	18	20	57	84	45	2.30		
	21	115	106.51	18	20	60	89	45	2.60		
	22	120	111.55	18	20	63	94	50	3.00		
	23	125	116.58	18	20	66	99	50	3.50		
	24	130	121.62	18	20	70	105	50	3.80		
	25	135	126.66	18	20	70	105	50	4.20		C45 Solid
	26	140	131.70	18	20	70	105	50	4.50		
	27	145	136.74	18	20	70	105	50	4.80		
	28	150	141.79	18	20	75	110	50	5.10		
	29	155	146.83	18	20	75	110	50	5.50		
	30	161	151.87	18	20	80	120	50	5.80		
	31	166	156.92	23	25	80	120	50	5.90		
	32	171	161.96	23	25	80	120	50	6.00		
	33	176	167.01	23	25	80	120	50	6.50		
	34	181	172.05	23	25	80	120	50	6.80		
	35	186	177.10	23	25	80	117	50	7.00		
	36	191	182.14	23	25	80	117	50	7.00		
	38	201	192.24	23	25	80	117	50	8.00		Fc360 Welding
	40	211	202.33	23	25	80	117	56	9.00		
	42	221	212.43	23	25	66	98	56	8.88		
	45	237	227.58	23	25	66	98	56	9.96		
	48	252	242.73	23	25	66	98	56	8.00		
	50	262	252.83	23	25	66	98	56	9.00		
	54	282	273.02	23	25	66	98	56	9.90		
	60	312	303.33	23	25	66	98	56	11.70		
	65	338	328.58	23	25	66	98	56	13.00		
	70	363	353.84	23	25	66	98	56	15.00		



B Type Weld



www.goodlucktransmission.com


Stock Bore Sprockets (NK) Asian Standard Series

NK 60-2B

NK 60-2B

SPROCKETS
Tooth width (T) mm 11.3


CHAIN
Pitch (P) mm 19.05
Internal width 12.70
Roller Φ (Dr) 11.91



B Type Solid

Stock Bore

Type	Teeth	Do	Dp	Stock	Bore d	Min	Max	BD	BL	Wt kg	Material
NK 60-2B	10	68	61.65	16	18	20	35	50	0.90		C45 Solid Hardened Teeth
	11	76	67.62	16	18	25	44	50	1.00		
	12	83	73.60	16	18	30	50	50	1.20		
	13	89	79.60	18	20	35	57	50	1.40		
	14	95	85.61	18	20	42	64	56	1.80		
	15	101	91.62	18	20	46	70	56	2.10		
	16	107	97.65	18	20	51	76	56	2.50		
	17	113	103.67	18	20	55	82	56	2.60		
	18	119	109.71	18	20	60	88	56	3.20		
	19	126	115.74	18	20	63	94	56	3.70		
	20	132	121.78	23	25	66	100	56	4.20		C45 Solid
	21	138	127.82	23	25	66	100	56	4.40		
	22	144	133.86	23	25	66	100	56	4.90		
	23	150	139.90	23	25	66	100	56	4.70		
	24	156	145.95	23	25	80	120	56	6.00		
	25	162	151.99	23	25	80	120	56	6.40		
	26	168	158.04	23	25	80	120	56	6.80		
	27	174	164.09	23	25	80	120	56	7.30		
	28	180	170.14	23	25	80	120	56	7.80		
	29	187	176.20	28	30	80	120	56	8.20		
NK 60-2B	30	193	182.25	28	30	89	130	56	9.00		Fc360 Welding
	31	199	188.30	28	30	89	127	56	9.30		
	32	205	194.35	28	30	89	127	56	9.50		
	33	211	200.41	28	30	89	127	56	9.70		
	34	217	206.46	28	30	89	127	56	10.50		
	35	223	212.52	28	30	89	127	56	11.00		
	36	229	218.57	28	30	66	98	56	8.50		
	38	241	230.69	28	30	66	98	56	9.00		
	40	253	242.80	28	30	66	98	56	9.70		
	42	266	254.92	28	30	75	107	56	11.00		
	45	294	273.09	28	30	75	107	71	12.80		
	48	302	291.27	28	30	75	107	71	14.00		
	50	314	303.39	28	30	75	107	71	16.00		
	54	338	327.63	28	30	75	107	71	18.00		
	60	375	363.99	28	30	75	107	71	21.50		
	65	405	394.30	28	30	75	107	71	24.00		
	70	436	424.61	28	30	75	107	71	30.00		



B Type Weld



苏州股特来传动科技有限公司


Stock Bore Sprockets (NK) Asian Standard Series

NK 80-2B

NK 80-2B

SPROCKETS
Tooth width (T) mm 14.1


CHAIN
Pitch (P) mm 25.4
Internal width 15.88
Roller Φ (Dr) 15.80



B Type Solid

Stock Bore

Type	Teeth	Do	Dp	Stock	Bore d	Min	Max	BD	BL	Wt kg	Material
NK 80-2B	10	93	82.19	21	23	35	58	63	2.00		C45 Solid Hardened Teeth
	11	102	90.16	21	23	38	60	63	2.50		
	12	110	98.14	23	25	46	69	63	2.70		
	13	118	106.14	23	25	55	80	63	3.40		
	14	127	114.15	23	25	60	88	63	3.90		
	15	135	122.17	23	25	63	95	63	4.40		
	16	143	130.20	23	25	66	100	71	5.40		
	17	151	138.23	23	25	66	100	71	6.00		
	18	159	146.27	23	25	80	120	71	7.50		
	19	167	154.32	23	25	80	120	71	8.00		C45 Solid
	20	176	162.37	23	25	89	130	71	9.00		
	21	184	170.42	23	25	89	130	71	10.30		
	22	192	178.48	33	35	80	117	71	11.00		
	23	200	186.54	33	35	80	117	71	11.80		
	24	208	194.60	33	35	80	117	80	12.60		
	25	216	202.66	33	35	80	117	80	13.40		
	26	224	210.72	33	35	80	117	80	14.30		
	28	241	226.86	33	35	80	117	80	16.00		
	30	257	243.00	33	35	80	117	80	18.30		
	32	273	259.14	33	35	80	117	80	20.40		
NK 80-2B	35	297	283.36	33	35	80	117	80	23.90		Fc360 Welding
	36	306	291.43	33	35	80	117	80	25.10		
	38	322	307.58	38	40	90	127	80	27.70		
	40	338	323.74	38	40	90	127	90	30.40		
	42	354	339.89	38	40	90	127	90	33.00		
	45	378	364.12	38	40	90	127	90	37.50		
	48	403	388.36	38	40	90	127	90	43.00		
	50	419	404.52	38	40	90	127	90	46.00		
	54	451	436.84	38	40	90	127	90	52.50		
	60	500	485.33	38	40	90	127	90	64.00		
	62	516	501.49	38	40	90	127	90	69.00		Fc360 Welding
	65	540	525.73	38	40	90	127	90	73.50		
	70	581	566.15	38	40	90	127	90	90.40		



B Type Weld




Stock Bore Sprockets (NK) Asian Standard Series

NK 100-2B NK 100-2C

NK 100-2B/NK 100-2C

SPROCKETS mm
Tooth width (T) 17.0


CHAIN mm
Pitch (P) 31.75
Internal width 19.05
Roller Φ (Dr) 19.05



B Type Solid

Stock Bore

Type	Teeth	Do	Dp	Stock	Bore d	Min	Max	BD	BL	Wt kg	Material
NK 100-2B	10	117	102.74	22	24	46	70	80	3.50		C45 Solid Hardened Teeth
	11	127	112.70	22	24	55	80	80	4.20		
	12	138	122.67	28	30	60	90	80	5.00		
	13	148	132.67	28	30	66	100	80	6.00		
	14	158	142.68	28	30	75	110	80	7.00		
	15	168	152.71	28	30	80	120	80	7.10		C45 Solid
	16	179	162.74	28	30	89	130	80	7.70		
	17	189	172.79	28	30	89	130	80	8.90		
	18	199	182.84	28	30	89	130	80	9.60		
	19	209	192.90	28	30	89	130	90	12.80		
	20	220	202.96	28	30	89	130	90	13.50		
	21	230	213.03	28	30	89	130	90	14.30		
	22	240	223.10	28	30	89	127	90	19.35		
	23	250	233.17	28	30	89	127	90	20.85		
	24	260	243.25	38	40	95	137	90	22.62		Fe360 Welding
	25	270	253.32	38	40	95	137	90	24.25		
	26	281	263.40	38	40	95	137	90	25.94		
	28	301	283.57	38	40	95	137	90	29.52		
	30	321	303.75	38	40	95	137	90	33.37		
	32	341	323.92	38	40	95	137	90	37.48		
	35	372	354.20	38	40	95	137	90	44.15		
	36	382	364.29	38	40	95	137	90	46.50		
	38	402	384.48	38	40	95	137	90	51.41		
	40	422	404.67	38	40	103	147	100	58.46		
NK 100-2C	42	443	424.86	38	40	103	147	100	63.90		
	45	473	455.16	38	40	103	147	100	72.56		
	48	503	485.45	38	40	103	147	100	81.81		
	50	524	505.65	38	40	103	147	100	88.31		
	54	564	546.05	38	40	103	147	100	102.11		
	60	625	606.66	38	40	103	147	125	127.87		



B Type Weld




Stock Bore Sprockets (NK) Asian Standard Series

NK 120-2B NK 120-2C

NK 120-2B/NK 120-2C

SPROCKETS mm
Tooth width (T) 22.7


CHAIN mm
Pitch (P) 38.10
Internal width 25.40
Roller Φ (Dr) 22.23



B Type Solid

Stock Bore

Type	Teeth	Do	Dp	Stock	Bore d	Min	Max	BD	BL	Wt kg	Material
NK 120-2B	10	140	123.29	26	28	55	80	100	8.00		C45 Solid Hardened Teeth
	11	153	135.24	26	28	60	90	100	8.70		
	12	165	147.21	28	30	66	100	100	9.20		
	13	177	159.20	28	30	75	115	100	10.90		
	14	190	171.22	28	30	80	120	100	11.40		
	15	202	183.25	38	40	80	120	100	13.20		C45 Solid
	16	214	195.29	38	40	95	140	100	16.50		
	17	227	207.35	38	40	95	140	100	19.00		
	18	239	219.41	38	40	103	150	100	21.00		
	19	251	231.48	38	40	103	150	100	23.00		
	20	263	243.55	38	40	103	150	100	26.00		
	21	276	255.63	38	40	103	150	100	28.00		
	22	288	267.72	38	40	103	147	100	30.00		
	23	300	279.80	38	40	103	147	100	33.00		
	24	312	291.90	38	40	110	157	100	31.00		Fe360 Welding
	25	324	303.99	38	40	110	157	100	33.00		
	26	337	316.09	38	40	110	157	100	35.00		
	28	361	340.29	38	40	110	157	100	39.00		
	30	385	364.50	38	40	110	157	100	43.90		
	32	410	388.71	38	40	110	157	100	47.00		
	35	446	425.04	38	40	110	157	100	56.80		
	36	458	437.15	38	40	110	157	100	60.00		
	38	483	461.38	38	40	110	157	100	67.00		
	40	507	485.60	43	45	125	177	140	84.30		
NK 120-2C	42	531	509.84	43	45	125	177	140	87.00		
	45	568	546.19	43	45	125	177	140	98.50		
	48	604	582.54	43	45	125	177	140	104.00		
	50	628	606.78	43	45	125	177	140	115.00		
	54	677	655.26	43	45	125	177	140	121.00		
	60	750	727.99	43	45	125	177	160	131.60		



B Type Weld