



TGL系列 TGL Series (GF-SERIES)


产品特点

- 双节式曲面齿联轴器
- 广泛应用于各种机械和液压领域
- 尼龙和钢的材料配合，免维护
- 可以补偿轴向、径向、角向误差
- 轴向插入装配，非常方便
- 成品孔径公差按照ISO标准为H7，键槽宽公差按照标准DIN6885/1为JS9，另有锥孔和英制孔
- 安装尺寸见下表：

Product features

- Double section curved surface coupling
- Widely used in various fields of machinery and hydraulics
- Non maintenance of nylon and steel material
- Compensation for axial, radial and angular errors
- The axial insert assembly is very convenient
- The product hole tolerance is H7 according to the ISO standard, and the tolerance of keyway width is in accordance with the standard, DIN6885/1byJS9, Another inch and the cone hole
- For installation size, see the table below:

曲面齿联动轴 Curved gear coupling

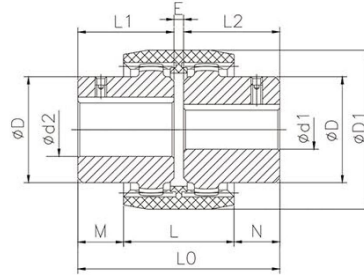

型号 Model		成品孔 Finished bore d1, d2		尺寸 (mm) Dimensions										最大孔径时联轴器重量 Coupling Weight with Max. Aperture		额定转矩 Rated Torque
普通型 General	加长型 Lengthened	预置孔 Premachined Bore	最大孔径 Max. aperture	I1,I2	L0	L	M,N	E	加长轴套 I1, I2 Max	D1	D	总重量 Total Weight	总重量 Total Weight			N.m
TGL-14	TGL-14-L	—	14	23	50	37	6.5	4	40	40	24	0.02	0.14			10
TGL-19	TGL-19-L	—	19	25	54	37	8.5	4	40	48	30	0.03	0.21			16
TGL-24	TGL-24-L	—	24	26	56	41	7.5	4	50	52	36	0.04	0.25			20
TGL-28	TGL-28-L	—	28	40	84	46	19	4	55	66	44	0.07	0.62			45
TGL-32	TGL-32-L	—	32	40	84	48	18	4	55	76	50	0.09	0.83			60
TGL-38	TGL-38-L	—	38	40	84	48	18	4	60	83	58	0.11	1.04			80
TGL-42	TGL-42-L	—	42	42	88	50	19	4	60	92	65	0.14	1.41			100
TGL-48	TGL-48-L	—	48	50	104	50	27	4	60	92	67	0.16	1.43			140
TGL-55	TGL-55-L	—	55	52	108	58	25	4	65	114	82	0.26	2.50			240
TGL-65	TGL-65-L	—	65	55	114	68	23	4	70	132	95	0.39	3.58			380