
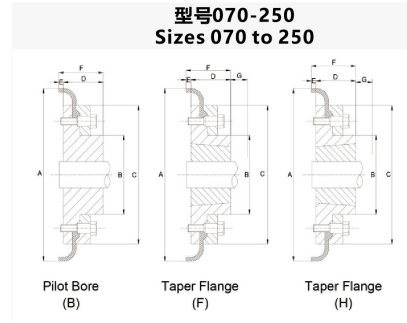


FFX 联轴器 FFX Tyre Couplings

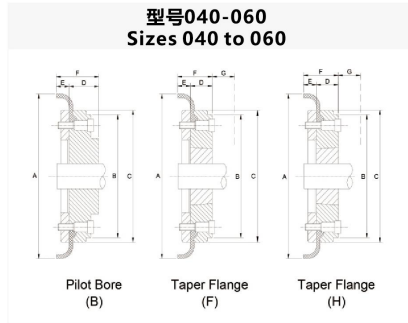

Size 产品型号	Bush Size 孔径	Max Bore 最大孔径		A	B	C	E	Type B				Clamping Screw 螺钉规格	Weight 单重 (kg)	Inertia 转动惯量 (kg ²)
		Metric	Inch					F&H型		B型				
		公制	英制					F	D	F	D			
FFX040B	12	32	-	104	-	82	11.0	-	-	33.0	22	M5	0.8	0.00074
FFX040F	1008	25	1	104	-	82	11.0	33.0	22	-	-	-	0.8	0.00074
FFX040H	1008	25	1	104	-	82	11.0	33.0	22	-	-	-	0.8	0.00074
FFX050B	15	38	-	133	79	100	12.5	-	-	45.0	32	M5	1.2	0.00115
FFX050F	1210	32	1.1/4"	133	79	100	12.5	38.0	25	-	-	-	1.2	0.00115
FFX050H	1210	32	1.1/4"	133	79	100	12.5	38.0	25	-	-	-	1.2	0.00115
FFX060B	18	45	-	165	70	125	16.5	-	-	55.0	38	M6	2.0	0.0052
FFX060F	1610	42	1.5/8"	165	103	125	16.5	42.0	25	-	-	-	2.0	0.0052
FFX060H	1610	42	1.5/8"	165	103	125	16.5	42.0	25	-	-	-	2.0	0.0052
FFX070B	22	50	-	187	80	144	11.5	-	-	47.0	35	M10	3.1	0.009
FFX070F	2012	50	2"	187	80	144	11.5	44.0	32	-	-	-	3.1	0.009
FFX070H	1610	42	1.5/8"	187	80	144	11.5	42.0	25	-	-	-	3.0	0.009
FFX080B	25	60	-	211	98	167	12.5	-	-	55.0	42	M10	4.9	0.018
FFX080F	2517	60	2.1/2"	211	97	167	12.5	58.0	45	-	-	-	4.9	0.018
FFX080H	2012	50	2"	211	98	167	12.5	45.0	32	-	-	-	4.6	0.017
FFX090B	28	70	-	235	112	188	13.5	-	-	63.5	49	M12	7.1	0.032
FFX090F	2517	60	2.1/2"	235	108	188	13.5	59.5	45	-	-	-	7.0	0.031
FFX090H	2517	60	2.1/2"	235	108	188	13.5	59.5	45	-	-	-	7.1	0.031
FFX100B	32	80	-	254	125	216	13.5	-	-	70.5	56	M12	9.9	0.055
FFX100F	3020	75	3"	254	120	216	13.5	65.5	51	-	-	-	9.9	0.055
FFX100H	2517	60	2.1/2"	254	113	216	13.5	59.5	45	-	-	-	9.4	0.054
FFX110B	30	90	-	279	128	233	12.5	-	-	75.5	63	M12	12.5	0.081
FFX110F	3020	75	3"	279	134	233	12.5	63.5	51	-	-	-	11.7	0.078
FFX110H	3020	75	3"	279	134	233	12.5	63.5	51	-	-	-	11.7	0.078
FFX120B	38	100	-	314	143	264	14.5	-	-	84.5	70	M16	16.9	0.137
FFX120F	3525	100	4"	314	140	264	14.5	79.5	65	-	-	-	16.5	0.137
FFX120H	3020	75	3"	314	140	264	14.5	65.5	51	-	-	-	15.9	0.13
FFX140B	75	130	-	359	178	311	16.0	-	-	110.5	94	M20	22.2	0.254
FFX140F	3525	100	4"	359	178	311	16.0	81.5	65	-	-	-	22.3	0.255
FFX140H	3525	100	4"	359	178	311	16.0	81.5	65	-	-	-	22.3	0.255
FFX160B	75	140	-	402	187	345	15.0	-	-	117.0	102	M20	35.8	0.469
FFX160F	4030	115	4.1/2"	402	197	345	15.0	92.0	77	-	-	-	32.5	0.38
FFX160H	4030	115	4.1/2"	402	197	345	15.0	92.0	77	-	-	-	32.5	0.38
FFX180B	75	150	-	470	200	398	23.0	-	-	137.0	114	M20	49.1	0.871
FFX180F	4535	125	5"	470	205	398	23.0	112.0	89	-	-	-	42.2	0.847
FFX180H	4535	125	5"	470	205	398	23.0	112.0	89	-	-	-	42.2	0.847
FFX200B	85	150	-	508	200	429	24.0	-	-	138.0	114	M20	58.2	1.301
FFX200F	4535	125	5"	508	205	429	24.0	113.0	89	-	-	-	53.6	1.281
FFX200H	4535	125	5"	508	205	429	24.0	113.0	89	-	-	-	53.6	1.281
FFX220B	85	160	-	562	218	474	27.5	-	-	154.5	127	M20	79.6	2.142
FFX220F	5040	125	5"	562	223	474	27.5	129.5	102	-	-	-	72.0	2.104
FFX220H	5040	125	5"	562	223	474	27.5	129.5	102	-	-	-	72.0	2.104
FFX250B	88	190	-	628	254	532	29.5	-	-	161.5	132	M20	104.0	3.505
FFX250F	5040	125	5"	628	254	532	29.5	155.5	127	-	-	-	106.0	2.104
FFX250H	5040	125	5"	628	254	532	29.5	155.5	127	-	-	-	106.0	2.104

Notes

用于轴上衬套的拧紧或松开以及轮胎夹紧螺栓的扳手间隙。

G=Wrench clearance needed to allow for the tightening or loosening of the bush on the shaft as well as the tyre clamping screws.