





PIV INFINITELY VARIABLE SPEED CHAINS



GL chain No.	Pitch p mm	Pin diameter, d2(max) mm	Pin length L(max) mm	Plate depth h2(max) mm	Plate thickness T(max) mm	Plate thickness T(max) mm	Width over friction plate a degree	Ultimate tensile strength Q (min) Kn	Weight per meter q Kg/m
A0	18.75	3.00	19.50	9.50	1.0	24.00	15	9.0	1.0
A1	19.00	3.00	19.50	10.60	1.5	30.44	15	9.0	1.0
A2	25.00	3.00	30.10	13.50	1.5	37.80	15	21.0	2.0
A3	28.60	3.00	35.30	16.00	1.5	44.20	15	38.5	3.0
A4	36.00	4.00	48.50	20.50	1.5	58.50	15	61.5	5.4
A5	36.00	4.00	60.50	20.50	1.5	70.00	15	71.0	6.7
A6	44.40	5.40	70.00	23.70	1.5	77.00	15	125.0	9.0

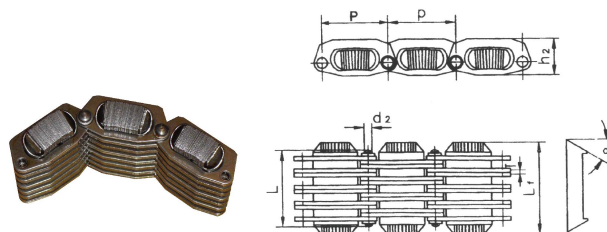

滚柱式无级变速链 ROLLER TYPE INFINITELY VARIABLE SPEED CHAINS



GL CHAIN NO.	PITCH	PLATE HEIGHT	ROLLER WIDTH	ROLLER THICKNESS
	P	W	b(min)	T (max)
	mm	mm	mm	mm
RB0	10.10	9.23	12.00	2.90
RB1	12.20	12.30	16.04	4.10
RB2	14.66	14.80	20.00	4.74
RB3	12.60	16.60	24.60	4.70
RB4	14.00	20.70	31.00	5.50
RC3	13.20	18.80	24.54	4.70
RC4	16.20	22.50	31.00	5.30