




STEEL DETACHABLE CHAIN

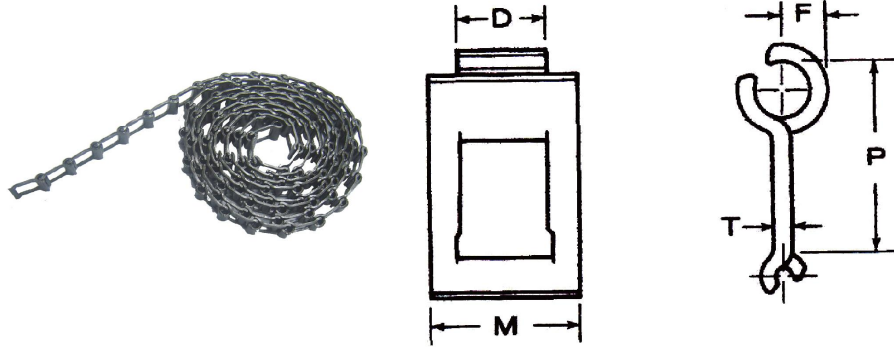

Chain No.	Links Per 10 ft	Approx. Wt. Per 100 ft lbs	Average Ultimate Strength lbs	Minimum Tensile Strength lbs	D (mm)	F (mm)	M (mm)	*P (mm)	T (mm)
25	133	20	950	760	10.72	4.572	17.8	22.96	1.854
32	104	32	1,650	1,320	15.09	5.842	23.8	29.39	2.286
32W	104	39	1,650	1,320	15.09	5.893	27.0	29.39	2.413
33	86	34	1,600	1,300	15.49	6.375	23.8	35.41	2.286
42	87	50	2,300	1,680	19.84	6.731	30.9	34.92	2.667
50H	87	63	2,600	2,240	19.84	7.112	32.5	34.92	3.175
51	106	40	2,100	1,680	17.86	5.893	27.8	28.78	2.540
52	80	66	2,700	2,160	21.44	7.696	35.7	38.30	3.048
55	74	62	2,800	2,240	20.22	8.128	32.5	41.40	3.175
62	73	90	4,200	3,520	24.99	8.509	39.7	42.01	3.759
62A	72	131	5,500	4,000	24.99	8.89	49.2	42.26	4.318
62H	73	112	4,400	3,600	24.99	8.712	47.6	42.01	3.937
67H	52	137	5,500	4,400	27.76	11.38	47.6	58.75	4.699
67XH	52	145	6,800	5,500	27.76	11.76	47.6	58.75	5.080
67W	52	144	4,800	3,800	27.76	10.87	60.3	58.75	3.937
70	60	130	4,800	4,000	27.76	10.39	49.2	51.13	4.318
72	59	131	4,800	4,000	27.76	10.39	49.2	51.43	4.318
S	41	130	4,800	3,840	27.76	13.16	49.2	78.81	4.318

* Assembled Chain Pitch - Limits for approximate 10 ft. strands are +3/8", -1/8"
All chain comes in 10ft lengths.