




M系列输送链及附件


M SERIES CONVEYOR CHAINS AND ATTACHMENTS

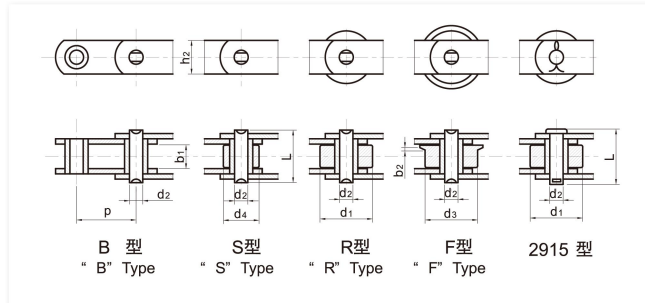

GL Chain No.	节距 Pitch						滚子外径 Roller dia.				内节内宽 Inside width	链板高度 Height of plate	销轴直径 Pin dia.	销轴长度 Length of Pin	抗拉强度 Ultimate tensile strength
	P						d1(max)	d3(max)	b2(max)	d4(max)	b1(max)	h2(max)	d2(max)	L	Q
	mm						mm	mm	mm	mm	mm	mm	mm	mm	kN
M20	50	63	80	100	125	160	25	35	3.50	12.50	15	19	6.00	35	20
M28	63	80	100	125	160	200	30	40	4.00	15.00	17	21	7.00	40	28
M40	80	100	125	160	200	250	36	45	4.50	18.00	19	26	8.50	45	40
M56	80	100	125	160	200	250	42	55	5.00	21.00	23	31	10.00	52	56
M80	100	125	160	200	250	315	50	65	6.00	25.00	27	36	12.00	62	80
M112	125	160	200	250	315	400	60	75	7.00	30.00	31	41	15.00	73	112
M160	160	200	250	315	400	500	70	90	8.50	36.00	36	51	18.00	85	160
M224	200	250	315	400	500	630	85	105	10.00	42.00	42	62	21.00	96	224
M315	200	250	315	400	500	630	100	125	12.00	50.00	47	72	25.00	112	315
M450	250	315	400	500	630	800	120	150	14.00	60.00	55	82	30.00	135	450
M630	250	315	400	500	630	800	140	175	16.00	70.00	65	105	36.00	154	630
M900	315	400	500	630	800	1000	170	210	18.00	85.00	76	123	44.00	180	900
2915-10	76.20						38.40	-	-	-	24.40	28.70	11.20	58.90	48.95
2915-20	101.60						38.40	-	-	-	24.40	28.70	11.20	58.90	48.95
2915-30	101.60						51.10	-	-	-	27.70	31.80	11.20	63.80	62.30
2915-40	101.60						38.40	-	-	-	21.10	31.80	12.78	64.30	71.20
2915-50	101.60						57.40	-	-	-	32.00	38.10	15.95	90.90	106.80
2915-60	152.40						51.10	-	-	-	27.40	31.80	11.20	69.10	66.75
2915-70	152.40						63.80	-	-	-	30.50	38.10	14.38	76.70	89.00
2915-80	152.40						51.10	-	-	-	32.00	38.10	15.95	87.60	102.35
2915-90	152.40						76.50	-	-	-	33.83	50.80	19.13	97.80	146.85

M系列输送链及附件

M SERIES CONVEYOR CHAINS AND ATTACHMENTS

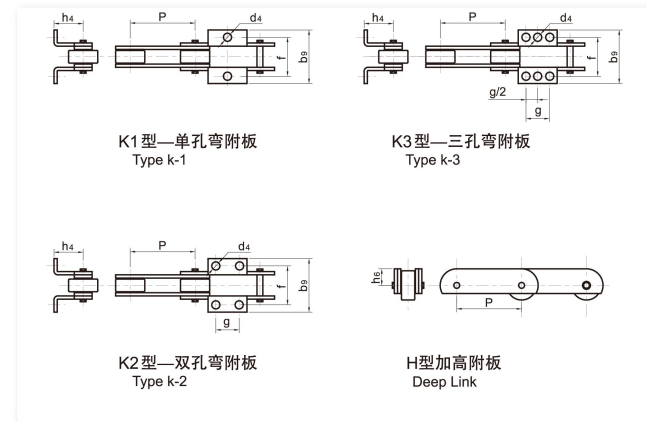


GL Chain No.	"K" 型 "K" Type										H型加高附板 "H" Type Deep Link
	d8	h4	f	b9	孔心距 Distance of holes						
	mm	mm	mm	mm	p	g	p	g	p	g	mm
M20	6.60	16	54	84	63	20	80	35	100	50	16.00
M28	9.00	20	64	100	80	25	100	40	125	65	20.00
M40	9.00	25	70	112	80	20	100	40	125	65	22.50
M56	11.00	30	88	140	100	25	125	50	160	85	30.00
M80	11.00	35	96	160	125	50	160	85	200	125	32.50
M112	14.00	40	110	184	125	35	160	65	200	100	40.00
M160	14.00	45	124	200	160	50	200	85	250	145	45.00
M224	18.00	55	140	228	200	65	250	125	315	190	60.00
M315	18.00	65	160	250	200	50	250	100	315	155	65.00
M450	18.00	75	180	280	225	85	315	155	400	240	80.00
M630	24.00	90	230	380	315	100	400	190	500	300	90.00
M900	30.00	110	280	480	315	65	400	155	500	240	120.00



FV系列输送链


FV SERIES CONVEYOR CHAINS

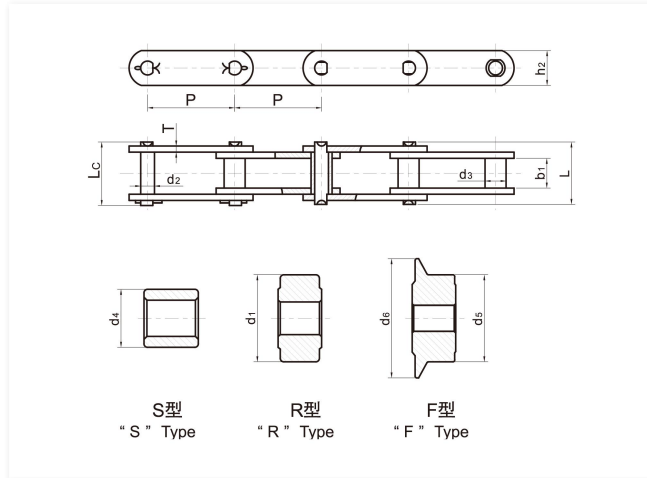

GL Chain No.	节距 Pitch				内节内宽 Inside width	链板高度 Plate depth	销轴直径 Pin dia.	套筒直径 Barrel dia.	链板厚度 Plate Thickness	滚子尺寸 Roller dimension				销轴长度 Pin Length		抗拉强度 Ultimate tensile strength		
	P				b1	h2	d2	d3	T	d4	d1	d5	d6	L	Lc	Q		
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
FV40	40	50	63	80	100	18	26	10	15	3	20	32	40	48	37	39.50	40	
FV63	63	80	100	125	160	22	30	12	18	4	26	40	50	60	46	50.50	63	
FV90	63	100	125	160	200	25	35	14	20	5	30	48	63	73	53	57.50	90	
FV112	100	125	160	200	250	30	40	16	22	6	32	55	72	87	63	67.50	112	
FV140	100	125	160	200	250	35	45	18	26	6	36	60	80	95	68	74.00	140	
FV180	125	160	200	250	315	45	50	20	30	8	42	70	100	120	86	93.00	180	
FV250	160	200	250	315	400	55	60	26	36	8	50	80	125	145	96	106.00	250	
FV315	160	200	250	315	400	65	70	30	42	10	60	90	140	170	117	125.00	315	
FV400	160	200	250	315	400	70	70	32	44	12	60	100	150	185	131	141.00	400	
FV500	200	250	315	400	500	80	80	36	50	12	70	110	160	195	141	151.00	500	
FV630	200	250	315	400	500	90	100	42	56	12	80	120	170	210	153	163.00	630	

FVT/MT系列输送链

FVT/MT SERIES CONVEYOR CHAINS

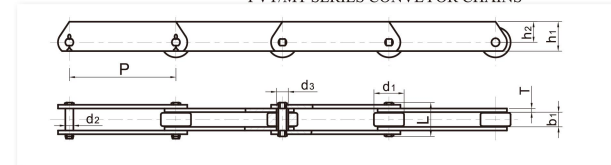

FVT系列输送链 FVT SERIES CONVEYOR CHAINS

GL Chain No.	节距 Pitch				内节内宽 Inside width	滚子直径 Roller dia.	销轴直径 Pin dia.	套筒直径 Barrel dia.	链板厚度 Plate Thickness	链板高度 Plate depth		销轴长度 Pin Length	抗拉强度 Ultimate tensile strength
	P				b1	d1	d2	d3	T	h1	h2	L	Q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN
FVT40	40	63	100	160	18	32	10	15	3	35	22	37	40
FVT63	63	100	125	160	25	40	12	18	4	40	25	46	63
FVT90	63	100	125	160	200	25	48	14	20	45	27.50	53	90
FVT112	100	125	160	200	250	30	55	16	22	50	30	63	112
FVT140	100	125	160	200	250	35	60	18	26	60	37.50	68	140
FVT180	125	160	200	250	315	40	70	20	30	70	45	86	180
FVT250	125	160	200	250	315	400	55	80	26	80	50	98	250
FVT315	160	200	250	315	400	65	90	30	42	90	55	117	315
FVT400	160	200	250	315	400	70	100	32	44	90	55	131	400
FVT500	160	200	250	315	400	500	80	110	36	50	100	141	500
FVT630	200	250	315	400	500	90	120	42	56	120	70	153	630


MT系列输送链 MT SERIES CONVEYOR CHAINS

GL Chain No.	节距 Pitch					内节内宽 Inside width	滚子直径 Roller dia.	销轴直径 Pin dia.	套筒直径 Barrel dia.	链板厚度	链板高度	销轴长度 Pin Length	抗拉强度 Ultimate tensile strength	
										Plate Thickness	Plate depth			
	P mm	b1 mm	d1 mm	d2 mm	d3 mm	T mm	h1 mm	h2 mm	L mm	Q kN				
MT20	40	50	63	80	100	16	25	6	9	2.50	25	16	35	20
MT28	50	63	80	100	125	18	30	7	10	3	30	20	40	28
MT40	63	80	100	125	160	20	36	8.50	12.50	3.50	35	22.50	45	40
MT56	63	80	100	125	160	24	42	10	15	4	45	30	52	56
MT80	80	100	125	160	200	28	50	12	18	5	50	32.50	62	80
MT112	80	100	125	160	200	32	60	15	21	6	60	40	73	112
MT160	100	125	160	200	250	37	70	18	25	7	70	45	85	160
MT224	125	160	200	250	315	43	85	21	30	8	90	60	98	224
MT315	160	200	250	315	400	48	100	25	36	10	100	65	112	315
MT450	200	250	315	400	500	56	120	30	42	12	120	80	135	450
MT630	—	250	315	400	500	66	140	36	50	14	140	90	154	630
MT900	—	250	315	400	500	78	170	44	60	16	180	120	180	900



双节距输送滚子链

DOUBLE PITCH CONVEYOR ROLLER CHAINS

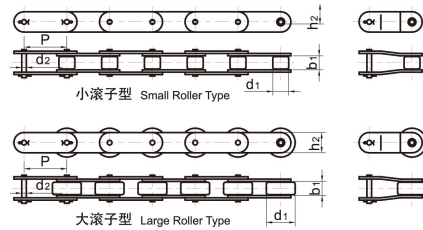

GL Chain No.		节距 Pitch	滚子外径 Roller dia.	内节内宽 Inside width	销轴直径 Pin dia.	链板高度 Plate depth	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
ISO	ANSI	P mm	d1 mm	b1 mm	d2 mm	h1 mm	Q kN	q kg/m
C208A	C2040	25.40	7.92	7.85	3.98	12.07	13.90	0.50
C208AL	C2042		15.88					0.84
C208B	A	25.40	8.51	7.75	4.45	11.81	17.80	0.55
C208BL	A		15.88					0.89
C210A	C2050	31.75	10.16	9.40	5.09	15.09	21.80	0.73
C210AL	C2052		19.05					1.27
C212A	C2060	38.10	11.91	12.57	5.96	18.10	31.30	1.12
C212AL	C2062		22.23					1.61
C212AH	C2060H	38.10	11.91	12.57	5.96	18.10	31.30	1.44
C212AHL	C2062H		22.23					2.07
C216A	C2080	50.80	15.88	15.75	7.94	24.13	55.60	2.08
C216AL	C2082		28.58					3.12
C216AH	C2080H	50.80	15.88	15.75	7.94	24.13	55.60	2.54
C216AHL	C2082H		28.58					3.58
C220A	C2100	63.50	19.05	18.90	9.54	30.17	87.00	3.01
C220AL	C2102		39.67					4.83
C220AH	C2100H	63.50	19.05	18.90	9.54	30.17	87.00	3.56
C220AHL	C2102H		39.67					5.38
C224A	C2120	76.20	22.23	25.22	11.11	36.20	125.00	4.66
C224AL	C2122		44.45					7.66
C224AH	C2120H	76.20	22.23	25.22	11.11	36.20	125.00	5.26
C224AHL	C2122H		44.45					8.26
C232A	C2160	101.60	28.58	31.75	14.29	48.26	223.00	8.15
C232AL	C2162		57.15					13.00
C232AH	C2160H	101.60	25.58	31.75	14.29	48.26	223.00	9.06
C232AHL	C2162H		57.15					12.77