





木材输送链

CONVEYOR CHAINS FOR WOOD CARRY

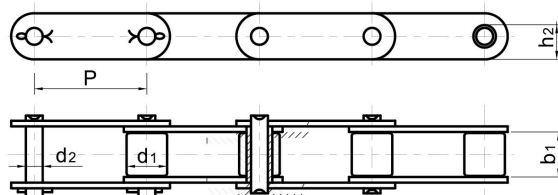

GL Chain No.	节距 Pitch	滚子外径 Roller dia.	内链接内宽 Inside width	销轴直径 Pin dia.	通道高度 Chain path depth	链板高度 Plate depth	抗拉强度 Ultimate tensile strength	重量 Weight approx.	
	P	d1(max)	b1(min)	d2(max)	h1(min)	h2(max)	Q	kg/ft	kg/m
81X	66.27	23	27	11.10	29.50	29.00	106.70	3.90	8.60
81XH	66.27	23	27	11.10	32.30	31.80	152.00	5.90	13.01
81XHD	66.27	23	27	11.10	32.30	31.80	152.00	6.52	14.37

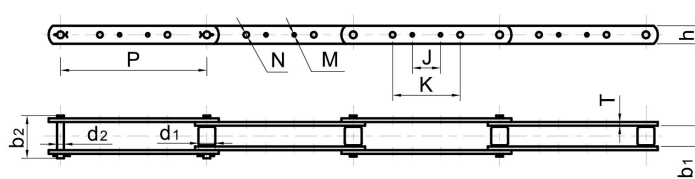

GL Chain No.	节距 Pitch	滚子直径 Roller dia.	内节内宽 Inside width	销轴直径 Pin dia.	销轴长度 Pin Length	链板厚度 Plate thick.	链板高度 Plate depth	链板尺寸 Plate dimensions				抗拉强度 Ultimate tensile strength	每米长重 Weight per meter
	P	d1(max)	b1(min)	d2(max)	b2(max)	T(max)	h(max)	J	K	M	N	Q	q
3939	203.20	23.00	27.00	11.10	53.69	4.10	28.50	-	-	-	-	115.58	2.41
D3939-B4								38.10	101.60	7.20	7.20		2.39
D3939-B21								38.10	-	7.20	-		2.40
D3939-B23								-	92.10	-	10.30		2.38
D3939-B24								-	101.60	-	7.20		2.40
D3939-B40								-	101.60	-	10.30		2.37
D3939-B43								38.10	92.10	7.20	10.30		2.45
D3939-B44								38.10	101.60	7.20	10.30		2.45