





双向侧弯链/钢制套筒链

DOUBLE FLEX CHAINS/STEEL BUSH CHAINS

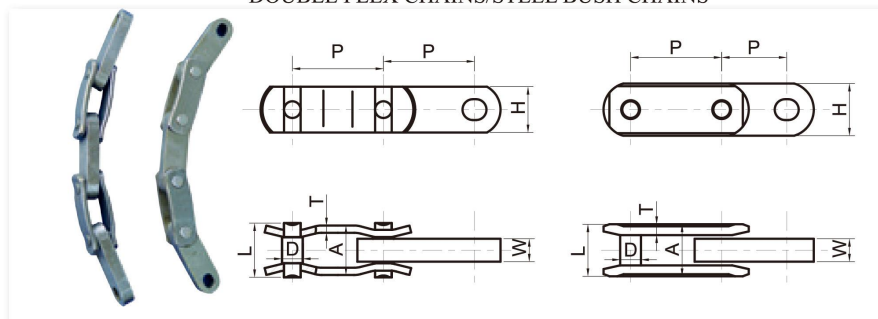

双向侧弯链 DOUBLE FLEX CHAINS

GL Chain No.	节距 Pitch	链宽 Chain width		链板 Link plate		销轴 Pin		活动半径 Flex radius	抗拉强度 Ultimate tensile strength
	P	A	W	H	T	L	D	R	Q
	mm	mm	mm	mm	mm	mm	mm	mm	kN
DF3500	76.20	38.10	16.00	31.80	6.40	36.50	14.50	508	213
	63.50								
F3910	76.20	38.10	16.00	31.80	6.40	36.50	14.50	560	213
	76.20								
DF3498	63.50	36.80	16.30	35.60	7.90	36.90	16.00	457	213
	44.45								

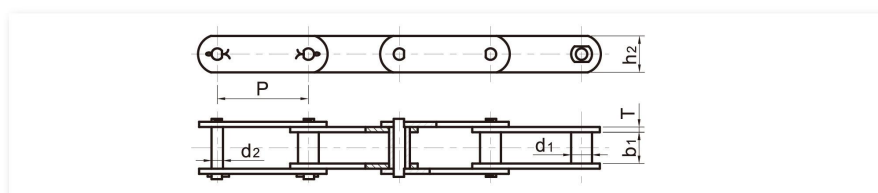

钢制套筒链 STEEL BUSH CHAINS

G L Chain No.	节距 Pitch	内节内宽 Inside width	套筒外径 Outside Barrel dia.	销轴直径 Pin dia.	链板高度 Plate depth	链板厚度 Thickness of Plate	抗拉强度 Ultimate tensile strength	重量 Weight approx	
	P	b1	d1	d2	h2	T	Q	q	q
	mm	mm	mm	mm	mm	mm	kN	kg/ft	kg/m
S188	66.27	26.92	22.35	12.70	28.70	6.35	111.30	1.72	5.64
S131	78.11	33.27	31.75	16.00	38.10	9.65	178.20	3.41	11.19
S102B	101.60	54.10	25.40	16.00	38.10	9.65	178.20	3.14	10.30
S111	120.90	66.80	36.58	19.05	50.80	9.65	222.70	4.64	15.22
S110	152.40	54.10	31.75	16.00	38.10	9.65	178.20	2.86	9.38