


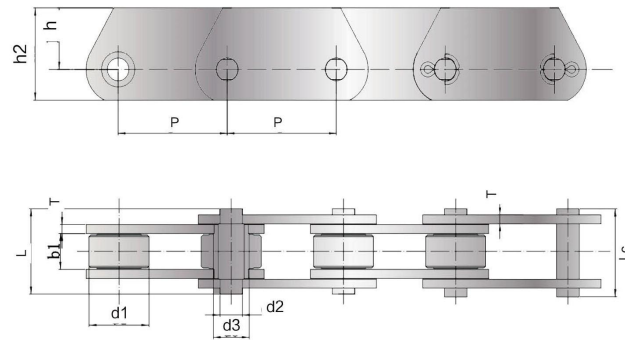

FVT 系列输送链
Conveyor chain (FVT Series)

GL Chain No	Pitch							Roller Diameter	Pin Diameter	Bush Diameter	Plate Thickness	Width Between Inner Plates	Pin Length				Plate Height		Ultimate Tensile Strength
链号	节距							滚子直径	销轴直径	套筒直径	链板厚度	内节内宽	销轴长度				链板高度		极限拉伸载荷
	p							d1 max	d2 max	d3 max	T max	b1 min	L max	Lc max	h2 max	h max	q min		
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN
SSFVT40	50	63	80	100	125	-	-	32	10	15	3.0	18	36	39.0	35.0	22.5	28.00		
SSFVT63	63	80	100	125	160	-	-	40	12	18	4.0	22	45	48.5	40.0	25.0	44.10		
SSFVT90	63	80	100	125	160	200	250	48	14	20	5.0	25	53	56.5	45.0	27.5	63.00		
SSFVT112	100	125	160	200	250	-	-	55	16	22	6.0	30	62	66.0	50.0	30.0	72.80		
SSFVT140	100	125	160	200	250	-	-	60	18	25	6.0	35	67	71.5	60.0	37.5	84.00		
SSFVT180	125	160	200	250	315	-	-	70	20	30	8.0	45	86	92.0	70.0	45.0	108.00		
SSFVT250	160	200	250	315	-	-	-	80	26	36	8.0	55	97	103.58	80.0	50.0	150.00		
SSFVT315	160	200	250	315	400	-	-	90	30	42	10	65	113	126.59	90.0	55.0	189.00		

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

滚子材料可选: POM,PA6
Roller material available: POM, PA6