



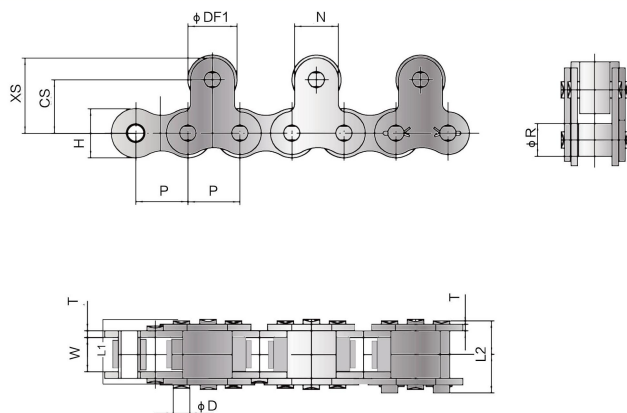


单排顶置滚轮链
Single strand top roller conveyor chain

GL Chain No	Pitch	Width Between Inner Plates	Roller Diameter	Pin Diameter	Pin Length		Plate Height	Plate Thickness	Top Roller					
链号	节距	内节内宽	滚子直径	销轴直径	销轴长度		链板高度	链板厚度	顶置滚轮					
	P	W	R	D	L1	L2	H	T	DF1	DF2	CS	N	XS	
SS40-TR	12.700	7.95	7.92	3.97	8.25	9.95	12.00	1.50	11.00	15.88	12.70	9.50	17.45	
SS50-TR	15.875	9.53	10.16	5.09	10.30	12.00	15.00	2.00	15.00	19.05	15.90	12.70	22.25	
SS60-TR	19.050	12.70	11.91	5.96	12.85	14.75	18.10	2.40	18.00	22.23	18.30	15.90	26.25	
SS80-TR	25.400	15.88	15.88	7.94	16.25	19.25	24.10	3.20	24.00	28.58	24.60	19.10	34.15	
SS100-TR	31.750	19.05	19.05	9.54	19.75	22.85	30.10	4.00	30.00	39.69	31.80	25.40	44.50	

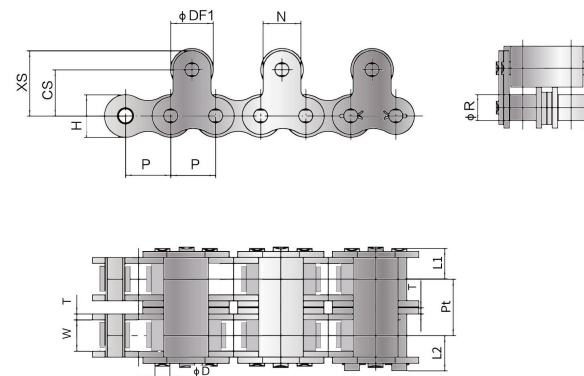

双排顶置滚轮链
Double strands top roller conveyor chain


GL Chain No	Pitch	Width Between Inner Plates	Roller Diameter	Transverse Pitch	Pin Diameter	Pin Length		Plate Height	Plate Thickness	Top Roller				
链号	节距	内节内宽	滚子直径	排距	销轴直径	销轴长度		链板高度	链板厚度	顶置滚轮				
	P	W	R	pt	D	L1	L2	H	T	DF1	DF2	CS	N	
SS40-2-TR	12.700	7.95	7.92	14.40	3.97	15.45	17.15	12.00	1.50	15.88	12.70	17.45	9.50	
SS50-2-TR	15.875	9.53	10.16	18.10	5.09	19.35	21.15	15.00	2.00	19.05	15.90	22.25	12.70	
SS60-2-TR	19.050	12.70	11.91	22.80	5.96	24.25	26.25	18.10	2.40	22.23	19.30	26.25	15.90	
SS80-2-TR	25.400	15.88	15.88	29.30	7.94	30.90	33.90	24.10	3.20	28.58	24.60	34.15	19.10	
SS100-2-TR	31.750	19.05	19.05	35.80	9.54	37.70	40.80	30.10	4.00	39.69	31.80	44.50	25.40	

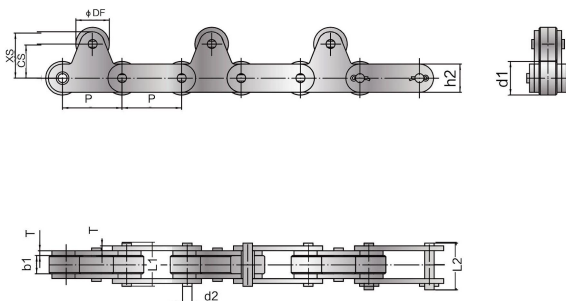

单排双节距顶置滚轮链
Single strand double pitch top roller chain

GL Chain No	Pitch	Width Between Inner Plates	Roller Diameter	Pin Diameter	Pin Length		Plate Height	Plate Thickness	Top Roller		
链号	节距	内节内宽	滚子直径	销轴直径	销轴长度		链板高度	链板厚度	顶置滚轮		
	P	b1	d1	d2	L1	L2	h2	T	DF	CS	XS
SS2040-TR	25.400	7.95	7.92	3.97	8.25	9.95	12.00	1.50	15.88	15.00	21.00
SS2050-TR	31.750	9.53	10.16	5.09	10.30	12.00	15.00	2.00	19.05	19.00	26.50
SS2060-TR	38.100	12.70	11.91	5.96	14.55	16.55	17.20	3.20	22.23	23.00	31.60
SS2080-TR	50.800	15.88	15.88	7.94	18.30	20.90	23.00	4.00	28.58	29.00	40.50
SS2100-TR	63.500	19.05	19.05	9.54	21.80	24.50	28.60	4.80	39.69	35.40	49.70

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel

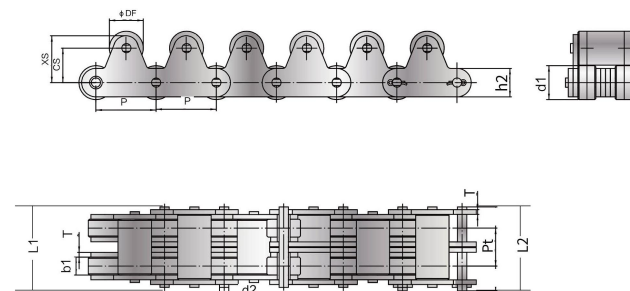

双排双节距顶置滚轮链
Double strands double pitch top roller conveyor chain

GL Chain No	Pitch	Width Between Inner Plates	Roller Diameter	Transverse Pitch	Pin Diameter	Pin Length		Plate Height	Plate Thickness	Top Roller		
链号	节距	内节内宽	滚子直径	排距	销轴直径	销轴长度		链板高度	链板厚度	顶置滚轮		
	P	b1	d1	pt	d2	L1	L2	h2	T	DF	CS	XS
SS2040-2-TR	25.400	7.95	7.92	14.40	3.97	15.45	17.15	12.00	1.50	15.88	15.00	21.00
SS2050-2-TR	31.750	9.53	10.16	18.10	5.09	19.35	21.15	15.00	2.00	19.05	19.00	26.50
SS2060-2-TR	38.100	12.70	11.91	26.20	5.96	27.70	29.60	17.20	3.20	22.23	23.00	31.60
SS2080-2-TR	50.800	15.88	15.88	32.60	7.94	34.60	37.20	23.00	4.00	28.58	29.00	40.50
SS2100-2-TR	63.500	19.05	19.05	39.10	9.54	41.40	44.10	28.60	4.80	39.69	35.40	49.70

链条材质: 300,400,600 系列不锈钢
Material: 300,400,600 series stainless steel